

# Agilent 81490A Reference Transmitter

Data Sheet



## 81490A reference transmitter

Agilent's 81490A Reference Transmitter is designed to offer excellent eye quality as a reference for testing 10GbE -LR/-ER, 10G Fibre Channel and short reach transceivers, such as 10GBase-SR, 40GBase-SR4, 100GBase-SR10 and according to 10 GFC Fibre Channel specifications. The modules are fully integrated into the industry standard Lightwave Measurement System (LMS) 816xB platform.

The Reference Transmitter is available for Multimode 850 nm and Singlemode 1310 nm/1550 nm applications. Offering both 1310 nm and 1550 nm in one module gives the fastest reconfiguration between these two transmission bands without reconnecting. The integration in the LMS mainframe offers an integration of the reference transmitter into the N4917A stressed eye software package. Of course a separate usage of the transmitter is also supported with SCPI language.

The separation of the signal source and the modulator is the only way to offer a zero-chirp modulation. This is essential for a clean and repeatable eye diagram when modulating with an appropriate clean external source to fulfill the requirements of the IEEE standard. Another advantage of this design compared to directly modulated transmitters is the wide extinction ratio range that can only be achieved with this design.

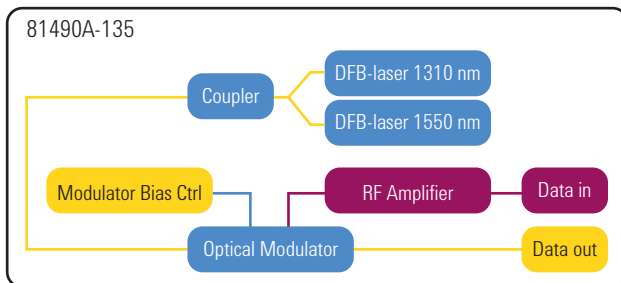


Figure 1. 81490A-135 1310 nm/1550 nm reference transmitter

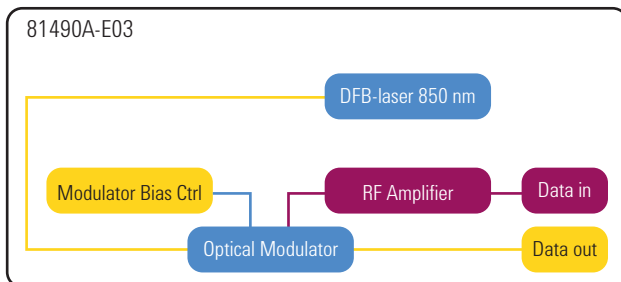


Figure 2. 81490A-E03 850 nm reference transmitter

## Benefits

- **Repeatable and reproducible measurements permit lower production test margins and improved specifications of the characterized devices.**
- **Reliable measurements ensure comparability of the test results.**
- **Support for full compliance to IEEE 802.3 stressed eye test in combination with the N4917A Optical Receiver Stress Test solution.**
- **Wide extinction range offers highest test range coverage to ensure best quality of the tested devices under all target operating conditions.**
- **Rapid test reconfiguration with dual-wavelength to switch between 1310 nm and 1550 nm by remote control or manually without exchanging a module.**
- **Scalability with integration into industry-standard Agilent LMS platform extends your optical workbench capabilities.**

## Application

- Reference transmitter for stressed eye compliance test according to IEEE 802.3.
- Creation of arbitrary optical modulation signals in combination with waveform generators.
- General transmission system test with special pulse patterns in combination with a pattern generator.

## Specifications

	81490A-135	81490A-E03
<b>Data input (RF In)</b>		
Operational data rate	622 Mb/s to 14.2 Gb/s	622 Mb/s to 14.2 Gb/s
Input voltage range for	Up to $0.9 V_{pp}$ (typical @ 1310 nm) Up to $1.1 V_{pp}$ (typical @ 1550 nm)	Up to $1.0 V_{pp}$ (typical)
Maximum input voltage	$< 2 V_{pp}$ (from $-2V$ to $+2V$ )	
Input impedance (nominal)	50 $\Omega$	
<b>Data Output (Optical out)</b>		
Fiber type	Standard single-mode 9/125 $\mu\text{m}$	Multimode fiber 50 $\mu\text{m}$
Laser type	CW DFB laser with built in isolator	
Optical wavelength	$\lambda$ : (1310 $\pm 10$ ) nm $\lambda$ : (1550 $\pm 10$ ) nm	$\lambda$ : (850 $\pm 10$ ) nm
Average optical output power <sup>1,2</sup>	$> 5$ dBm	$> 0.0$ dBm
Attenuation range (nominal)	6 dB	
Electro-optical modulation bandwidth <sup>3</sup>	10 MHz to 33 GHz (typical)	10 MHz to 20 GHz (typical)
Electro-optical conversion ratio <sup>2,5</sup>	$> 5$ mW/V	$> 1.0$ mW/V
Relative intensity noise (RIN) <sup>4,5</sup>	$< -136$ dB/Hz	$< -136$ dB/Hz (typical)
Maximum extinction ratio (ER) <sup>5</sup>	$> 10$ dB (dependant on input voltage amplitude)	
Vertical eye closure penalty <sup>5,6</sup>	$< 0.5$ dB (typical)	$< 0.7$ dB (typical)
Rise and fall time (20% to 80%) <sup>4,5</sup>	$< 25$ ps 17 ps (typical)	20 ps (typical)
Jitter (peak-peak) <sup>5,7</sup>	$< 18$ ps $< 12$ ps (typical)	$< 18$ ps (typical)

1. After TX\_Recal operation

2. At attenuation 0 dB

3.  $-6$  dB decrease relative to maximum response

4. For  $0.6 V_{pp}$  to  $0.85 V_{pp}$  data at 1310 nm; for  $0.6 V_{pp}$  to  $1.0 V_{pp}$  data at 1550 nm; for  $0.6 V_{pp}$  to  $1.0 V_{pp}$  data at 850 nm

5. At data rates 10.3125 Gb/s, 10.51875 Gb/s; for whole operational data range typical; temperature change  $< \pm 1$  K and operation point adjusted to 50% eye crossing

6. At 1% center region

7. Jitter of input signal  $< 10$  ps

## General specifications

Optical connector interface	Agilent universal adapter SMF 28
RF connector interface	2.4 mm female
Module size (H x W x D)	75 mm x 64 mm x 335 mm (2.8" x 2.6" x 13.2")
Module weight	1.0 kg (2.2 lbs)
Warmup time	60 min
Operating temperature	+5 °C to +40 °C
Storage temperature	-40 °C to +70 °C
Humidity	5% to 95% relative humidity, non-condensing
816xA/B firmware revision	5.25 and higher
Recommended recalibration period	2 years

## Ordering Information

### 81490A reference transmitter

-135	1310 nm and 1550 nm
-E03	850 nm

### Cal and warranty

	Return-to-Agilent
R 1280	Warranty and service plan
	3 month Return-to-Agilent
R-51B-001-3A	Warranty extended to 3 years
	Agilent Calibration Upfront
E-50C-011-3	Support plan 3 year coverage



myAgilent

[www.agilent.com/find/myagilent](http://www.agilent.com/find/myagilent)

A personalized view into the information most relevant to you.



[www.lxistandard.org](http://www.lxistandard.org)

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.

### Agilent Channel Partners

[www.agilent.com/find/channelpartners](http://www.agilent.com/find/channelpartners)

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

[www.agilent.com/find/advantageservices](http://www.agilent.com/find/advantageservices)



[www.agilent.com/quality](http://www.agilent.com/quality)

[www.agilent.com](http://www.agilent.com)

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

### Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201

For other unlisted countries:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

Revised: October 11, 2012

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012  
Published in USA, November 16, 2012  
5989-7326EN



Agilent Technologies