



Agilent
81495A Reference Receiver
Data Sheet



Agilent Technologies

81495A Reference Receiver

Agilent's 81495A Reference Receiver is an O/E converter optimized for transceiver loop-back test according to IEEE 802.3ae, -LR, -LRM, -ER, -SR and FCx1, FCx2, FCx4, FCx8 and FCx10.

Offering a multimode fiber input, single-mode and multimode signals can be detected. Therefore the module covers the functionality of two modules in one, without extra cost.

The module is fully integrated into the industry standard Agilent Lightwave Measurement System LMS (816x A/B) platform.

Together with the huge range of modules for the LMS, any optical test application can be build within minutes. Remote control can be used to monitor the average optical power of the analyzed signal.

For the transceiver loop-back test the return signal of the transceiver is fed back to the BERT (Bit Error Ratio Tester). As the transceiver output is optical, the signal must first be converted to the electrical domain with the 81495A Reference Receiver.

The performance of this conversion has significant influence on the results of the loop-back test. The 81495A reference receiver works perfectly with the N4917A Optical Receiver Stress Test solution.


As additional feature the reference receiver provides an integrated optical average power meter. The capability of verifying the average optical power of the connected signal with the same receiver as the RF signal offers a fast and simple way to control the average signal power of the tested signal.

Benefits

- Single-mode and multimode O/E in one device provides best cost efficiency.
- Clean eye for best loop-back performance in transceiver test.
- Low noise and low jitter to support reliable O/E conversion for optical stress test.
- Compliance to IEEE 802.3ae -LR, -LRM, -ER, -SR and up to 10 GFC in combination with the N4917A Optical Receiver Stress Test solution.
- Quick signal level verification and diagnosis with integrated average optical power meter.
- Linear conversion with internal amplifier extends the application as frontend O/E converter.
- Seamless integration in the industry standard Agilent LMS platform extends your optical workbench capabilities.

Applications

- Loop-back test for compliance with IEEE 802.3ae optical transmitter stress test.
- Qualitative analysis of modulated signals with an electrical spectrum analyzer or oscilloscope
- Any scientific optical measurement setup that requires O/E conversion up to 9 GHz.

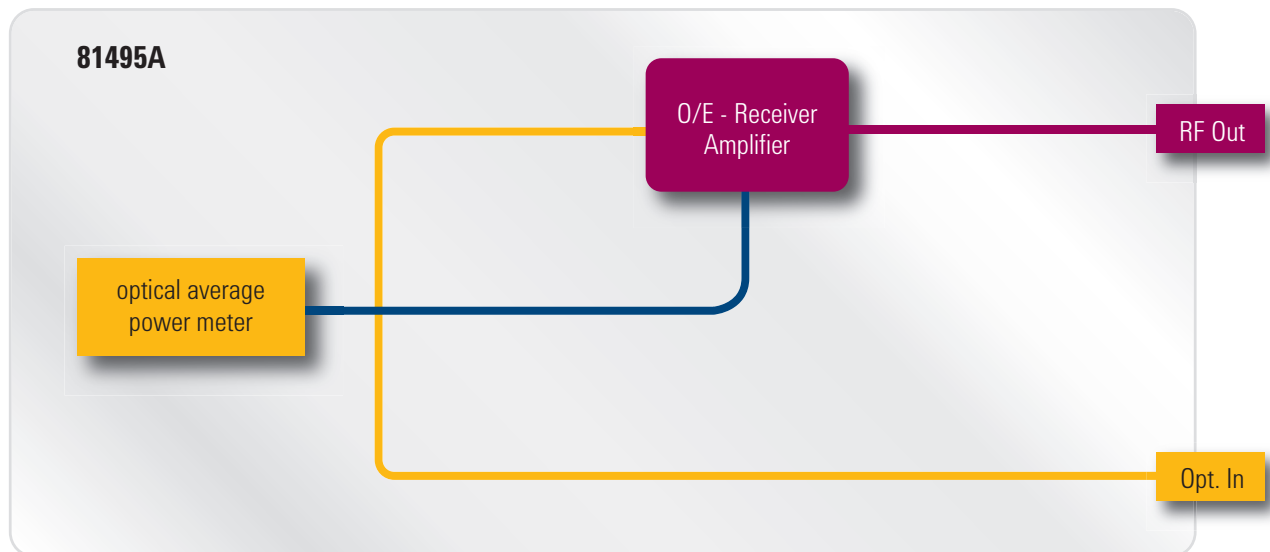

Specifications

Data Input (Optical in)

Operational data rate	622 Mb/s to 12.5 Gb/s	
Fiber type	Standard multi-mode 62.5 μm/125 μm	
Wavelength range	750 nm to 1650 nm	
Maximum safe input power	2 mW	
Maximum linear input power ^[f1]	-3 dBm	
Noise equivalent power (rms)	λ = 850 nm	< 3.0 μW (typical)
	λ = 1310 nm	< 1.5 μW (typical)
Optical-to-electrical conversion ratio ^[f2]	λ = 850 nm	> 250 V/W (typical)
	λ = 1310 nm	> 400 V/W (typical)
	λ = 1550 nm	> 350 V/W (typical)
Return loss	λ = 850 nm MM	> 14 dB (typical)
	λ = 1310 nm SM	> 27 dB (typical)

Data Output (RF out)

Output impedance (nominal)	50 Ω
Opto-electrical modulation bandwidth ^[f3]	DC to 9.3 GHz (typical)
Rise and fall times (20% to 80%)	< 35 ps
Jitter ^[f4]	< 20 ps

Optical average power meter (specifications valid at 850 nm, 1310 nm, 1550 nm)

Power range	-40 dBm to +5 dBm	
Total uncertainty (-25 dBm to +2 dBm) ^[f5]	< ±0.5 dB (typical)	
Linearity (-25 dBm to +2 dBm) ^[f5]	< ±0.05 dB (typical)	
Noise (2σ) ^[f6]	λ = 850 nm	< 35 nW
	λ = 1310 nm, 1550 nm	< 20 nW
Averaging time (selectable)	100 μs to 10 s	

[f1] Compression < 1 dB

[f2] OMA ≤ 0.5 mW and average power ≤ 0.3 mW

[f3] -3 dB decreases relative to 100 MHz

[f4] Jitter of input signal < 10 ps

[f5] NA ≤ 0.24; within 5 min after zeroing, at constant temperature ±1 °K,

For 850 nm and 1550 nm: up to 0 dBm

For 1550 nm: add 0.05 dB above -3 dBm

[f6] 300 samples, averaging time 1 s, constant temperature ±1K

General specifications

Optical connector interface

Agilent universal adapter straight ferrule

RF connector interface

2.4 mm female

Module size (H x W x D)

75 mm x 32 mm x 335 mm (2.8" x 2.3" x 13.2")

Module weight

0.5 kg (1.1 lbs)

Warmup time

20 min

Operating temperature

+5 °C to +40 °C

Storage Temperature

- 40 °C to +70 °C

Humidity

15% to 95% relative humidity, non-condensing

816xA/B Firmware revision

5.01 and higher

Recommended recalibration time

3 years

Ordering Information

81495A-085 Reference Receiver

Calibration and Warranty

R 1280

Return-to-Agilent
warranty and service plan

R-51B-001 - 3A

3 month return-to-Agilent
warranty extended to 3 years

R-50C-011 - 3

Agilent Calibration Up front
Support Plan 3 year coverage

Optical instruments online information

Optical test instruments
www.agilent.com/find/oct

Lightwave Component Analyzers
www.agilent.com/find/lca

Polarization solutions
www.agilent.com/find/pol

Spectral analysis products
www.agilent.com/comms/octspectral

Electro-optical converters
www.agilent.com/find/ref

Optical test instruments accessories
www.agilent.com/comms/oct-accessories

Firmware and driver download
www.agilent.com/comms/octfirmware

Agilent photonic discussion forum
www.agilent.com/find/photonic_forum

Agilent Channel Partners

www.agilent.com/find/channelpartners

Get the best of both worlds: Agilent's
measurement expertise and product
breadth, combined with channel
partner convenience.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment through-out its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements. For information regarding self maintenance of this product, please contact your Agilent office.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance, onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

www.agilent.com/find/removealldoubt



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



www.lxistandard.org

LXI is the LAN-based successor to GPIB, providing faster, more efficient connectivity. Agilent is a founding member of the LXI consortium.

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Latin America	305 269 7500
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

Europe & Middle East

Austria	43 (0) 1 360 277 1571
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201

Other European Countries:
www.agilent.com/find/contactus

Revised: October 1, 2009

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2008 - 2010
Printed in USA, May 17, 2010
5989-7526EN



Agilent Technologies