


# Agilent E2272A Dual 8x1 Relay Multiplexer M-Module

## Data Sheet

- Single wide, register based
- Configure as two 8x1 multiplexers or one 16x1 multiplexer
- FIFO for storing up to 8 relay operations
- Use as an output MUX in a switch configuration

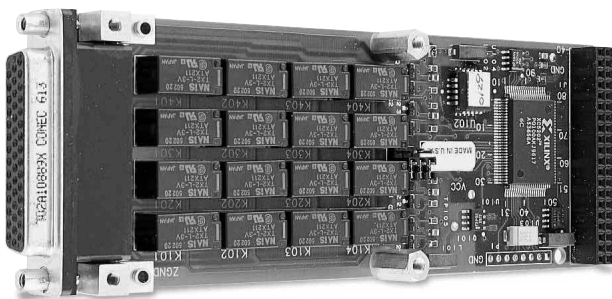

Agilent E2272A

### Description

The Agilent E2272A Dual 8x1 Relay Multiplexer is a **single-wide, register-based M-Module**. Use the E2272A as an input or output multiplexer for a matrix or other switching configuration. You can also connect multiple analog signals to a DMM or other instruments.

It consists of 16 DPST latching relays and is organized as two separate 8x1 relay multiplexers. This allows the selection of one of eight two-wire signals to connect to one common destination while the other set of eight two-wire signals can be selectively connected to a second destination. By moving a jumper on the module, you configure the E2272A as one 16x1 multiplexer.

Logic on the card provides for maskable interrupts (INTC type) once the requested relay movements are complete. The module also has a FIFO for storing up to 8 relay operations. Rapid setup changes can be written to the module and executed with only one interrupt occurrence once the entire group of relay movements is complete.

With each M-Module having its own address within the E2250A and E2251A M-Module carriers, you have the flexibility to use the M-Modules in many combinations. This flexibility allows you to get the amount of functionality you need in smaller blocks, lowering your overall system costs. Please see the E2250A or E2251A Technical Specifications for M-Module slot requirements.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

## Product Specifications

### Input

**Maximum voltage (any terminal to any other terminal or chassis):**

**Note:** *These limits apply only if the product is installed in a humidity-controlled (<60% RH) environment where airborne contaminants and transients are controlled, and no relay connection is made to power mains. If these conditions cannot be maintained, then 60 Vdc, 48 Vac-rms or 68 Vac-peak voltage limit applies.*

<b>DC:</b>	60 V/200 V (see note)
<b>AC rms:</b>	48 V/125 V (see note)
<b>AC peak:</b>	68 V/175 V (see note)

**Maximum current (noninductive):**

**Per channel:**

<b>DC:</b>	2 A
<b>AC peak:</b>	2 A

**Per module:**

<b>DC:</b>	8 A
<b>AC rms:</b>	8 A

**Maximum power:**

**Per channel:**

<b>DC:</b>	50 W
<b>AC:</b>	50 VA

**Per module:**

<b>DC:</b>	50 W (16-to-1 mode), 100 W (8-to-1 mode)
<b>AC:</b>	50 VA (16-to-1 mode), 100 VA (8-to-1 mode)

### DC

**Maximum thermal offset per channel, differential Hi-Lo:** <3  $\mu$ V (typical)

**Closed channel resistance (per channel):**

<b>Initial:</b>	0.2 $\Omega$ (typical)
<b>End of life:</b>	<2 $\Omega$

**Insulation resistance (between any two points):**

<b><math>\leq 40^\circ\text{C}</math>, <math>\leq 65\%</math> RH:</b>	10E8 (typical)
<b><math>\leq 40^\circ\text{C}</math>, <math>\leq 95\%</math> RH:</b>	n/a
<b><math>\leq 25^\circ\text{C}</math>, <math>\leq 40\%</math> RH:</b>	10E8 (typical)

### AC

**Typical bandwidth (-3 dB):** >10 MHz (typical)

**Crosstalk (dB, channel-to-channel):**

<b>&lt;10 kHz:</b>	n/a
<b>&lt;100 kHz:</b>	<-64 dB (typical)
<b>&lt;1 MHz:</b>	<-44 dB (typical)
<b>&lt;10 MHz:</b>	<-24 dB (typical)

**Closed channel capacitance:**

<b>Channel-Channel:</b>	<20 pF (8-to-1 mode) (typical), <25 pF (16-to-1 mode) (typical)
<b>Hi-Lo:</b>	<40 pF (8-to-1 mode) (typical), <70 pF (16-to-1 mode) (typical)
<b>Channel-Chassis:</b>	<75 pF (8-to-1 mode) (typical), <140 pF (16-to-1 mode) (typical)

### General Characteristics

<b>Relays:</b>	16 latching relays
<b>Typical relay life (number of operations):</b>	
<b>No load:</b>	n/a
<b>Rated load:</b>	10E5 (typical)
<b>Time to close or open a channel (register programming):</b>	8 msec
<b>Connector type, wire size:</b>	
<b>Standard:</b>	44 pin D-Sub
<b>Screw:</b>	n/a
<b>Power up/down states:</b>	Latching relays retain last programmed state

### M-Module Characteristics

<b>Output connector type:</b>	44-pin D-Sub (female)
<b>Standard compliance:</b>	IDENT, A08, D08, INTC
<b>Accessory:</b>	44-pin D-Sub (male) with plastic housing

## General Specifications

### VXI Characteristics

VXI device type:	Register based
Data transfer bus:	n/a
Size:	n/a
Slots:	n/a
Connectors:	n/a
Shared memory:	n/a
VXI busses:	n/a
C-size compatibility:	Yes with E2251A

### Instrument Drivers

See the Agilent Technologies Website ([http://www.agilent.com/find/inst\\_drivers](http://www.agilent.com/find/inst_drivers)) for driver availability and downloading.

Command module firmware:	Downloadable
Command module firmware rev:	A.08
I-SCPI Win 3.1:	No
I-SCPI Series 700:	No
C-SCPI LynxOS:	No
C-SCPI Series 700:	No
Panel Drivers:	No
VXIplug&play Win Framework:	No
VXIplug&play Win 95/NT Framework:	Yes
VXIplug&play HP-UX Framework:	No

### Module Current

	$I_{PM}$ (A)	$I_{DM}$ (A)
+5 V:	0.2 A	0.18 A
+12 V:	0	0
-12 V:	0	0
+24 V:	0	0
-24 V:	0	0
-5.2 V:	0	0
-2 V:	0	0

### Ordering Information

Description	Product No.
Dual 8x1 Relay Multiplexer M-Module	E2272A

## Related Literature

*2000 Test System and VXI Catalog CD-ROM,*  
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

*2000 Test System and VXI Catalog,*  
Agilent Pub. No. 5980-0307E (overview of VXI products )

*1998 Test System and VXI Products Data Book,*  
Agilent Pub. No. 5966-2812E

## Online

Internet access for Agilent product information, services and support  
[www.agilent.com/find/tmdir](http://www.agilent.com/find/tmdir)

VXI product information  
[www.agilent.com/find/vxi](http://www.agilent.com/find/vxi)

Defense Electronics Applications  
[www.agilent.com/find/defense\\_ATE](http://www.agilent.com/find/defense_ATE)

Agilent Technologies VXI Channel Partners  
[www.agilent.com/find/vxichanpart](http://www.agilent.com/find/vxichanpart)

Agilent Technologies' HP VEE Application Website  
[www.agilent.com/find/vee](http://www.agilent.com/find/vee)

Agilent Technologies Data Acquisition and Control Website  
[www.agilent.com/find/data\\_acq](http://www.agilent.com/find/data_acq)

Agilent Technologies Instrument Driver Downloads  
[www.agilent.com/find/inst\\_drivers](http://www.agilent.com/find/inst_drivers)

Agilent Technologies Electronics Manufacturing Test Solutions  
[www.agilent.com/go/manufacturing](http://www.agilent.com/go/manufacturing)

**Get assistance with all your test and measurement needs at**  
[www.agilent.com/find/assist](http://www.agilent.com/find/assist)  
**or check your local phone book for the Agilent office**  
**near you.**

## Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources ([www.agilent.com](http://www.agilent.com)).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

## Phone or Fax

**United States:**  
(tel) 1 800 829 4444

**Canada:**  
(tel) 1 877 894 4414  
(fax) (905) 282 6495

**China:**  
(tel) 800 810 0189  
(fax) 800 820 2816

**Europe:**  
(tel) (31 20) 547 2323  
(fax) (31 20) 547 2390

**Japan:**  
(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

**Korea:**  
(tel) (82 2) 2004 5004  
(fax) (82 2) 2004 5115

**Latin America:**  
(tel) (305) 269 7500  
(fax) (305) 269 7599

**Taiwan:**  
(tel) 0800 047 866  
(fax) 0800 286 331

**Other Asia Pacific Countries:**  
(tel) (65) 6375 8100  
(fax) (65) 6836 0252  
(e-mail) [tm\\_asia@agilent.com](mailto:tm_asia@agilent.com)

Data Subject to Change  
© Agilent Technologies, Inc. 2000  
Printed in the U.S.A. May 1, 2004  
5965-8815E



**Agilent Technologies**