


# Agilent 8922P/X/R/Y

## GSM Multiband Test Solutions

### Data Sheet

- **8922P and 8922X**  
GSM Multiband Test Systems for Production Applications
- **8922R and 8922Y**  
GSM Multiband Test Systems for Service Applications

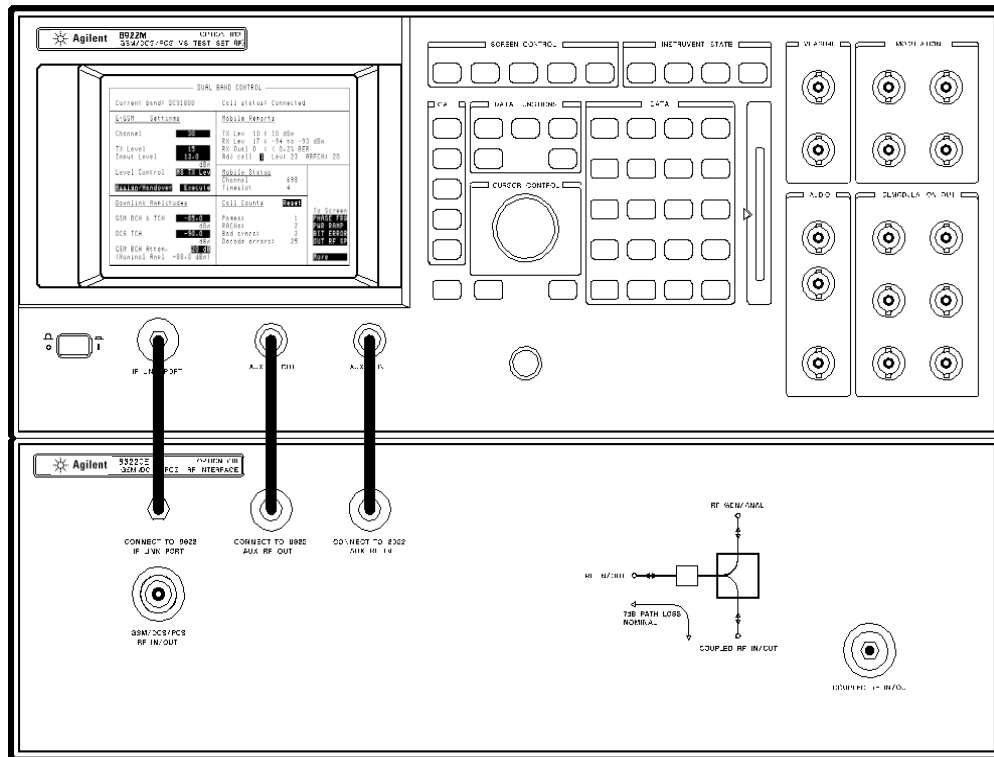

### The first choice for GSM mobile service and repair

Troubleshoot and find faults fast with the Agilent Technologies 8922R and 8922Y GSM multiband test systems. Use them to reduce false failures with a test set that combines versatility with ease of use.

### Serving the needs to the GSM mobile manufacturer

Maximize production throughput and minimize the cost per test with the 8922P and 8922X multiband test systems. They offer the highest speed of test while guaranteeing accurate and repeatable measurements.

### Test dual-band mobiles

Use the 8922 multiband test systems to verify the performance and functionality of both dual-band and conventional GSM900, DCS1800, and PCS1900 mobiles.



**Agilent Technologies**


Innovating the HP Way

## Table of Contents

|    |   |
|----|---|
|    | <b>Agilent 8922P/X/R/Y Test Set Specifications</b>          |
| 5  | GSM Functionality   |
| 5  | RF Generator  |
| 6  | 10 MHz to 1 GHz Aux RF Out Connector                        |
| 6  | 1710 to 1990 MHz Aux RF Out Connector                       |
| 6  | 0.3 GMSK Modulation   |
| 7  | Pulse Modulation  |
| 7  | 30 dB Pulse Modulation                                      |
| 7  | RF Analyzer   |
| 7  | CW RF Frequency Measurement                                 |
| 8  | CW RF Power Measurement                                     |
| 8  | Peak Transmitter Carrier Power Measurement                  |
| 9  | Pulse On/Off Ratio Measurement                              |
| 9  | Amplitude Envelope Measurement                              |
| 9  | Phase and Frequency Measurement                             |
| 10 | 0.3 GMSK Data Recovery                                      |
| 10 | FM Demodulation Output                                      |
| 10 | Pulse Demodulation Output                                   |
| 10 | Output RF Spectrum Measurement                              |
| 11 | Spectrum Analyzer   |
| 11 | Audio Source  |
| 11 | Audio Analyzer  |
| 12 | Oscilloscope  |
| 12 | Remote Programming  |
| 12 | Printer Support   |
| 13 | Reference Specifications                                    |
| 13 | General Specifications                                      |
| 14 | 8922P/X/R/Y Options, System Configurations,<br>and Upgrades |
| 14 | Printers and Printer Accessories                            |
| 15 | 8922F/H/S/M Upgrades and Features Comparison                |

**Switch on one of Agilent Technologies' GSM test sets** and you'll find that your mobile finds service immediately. Now make a call and you're up and running; ready to perform all the key transmitter and receiver measurements.

**Built into every test set you'll find:**

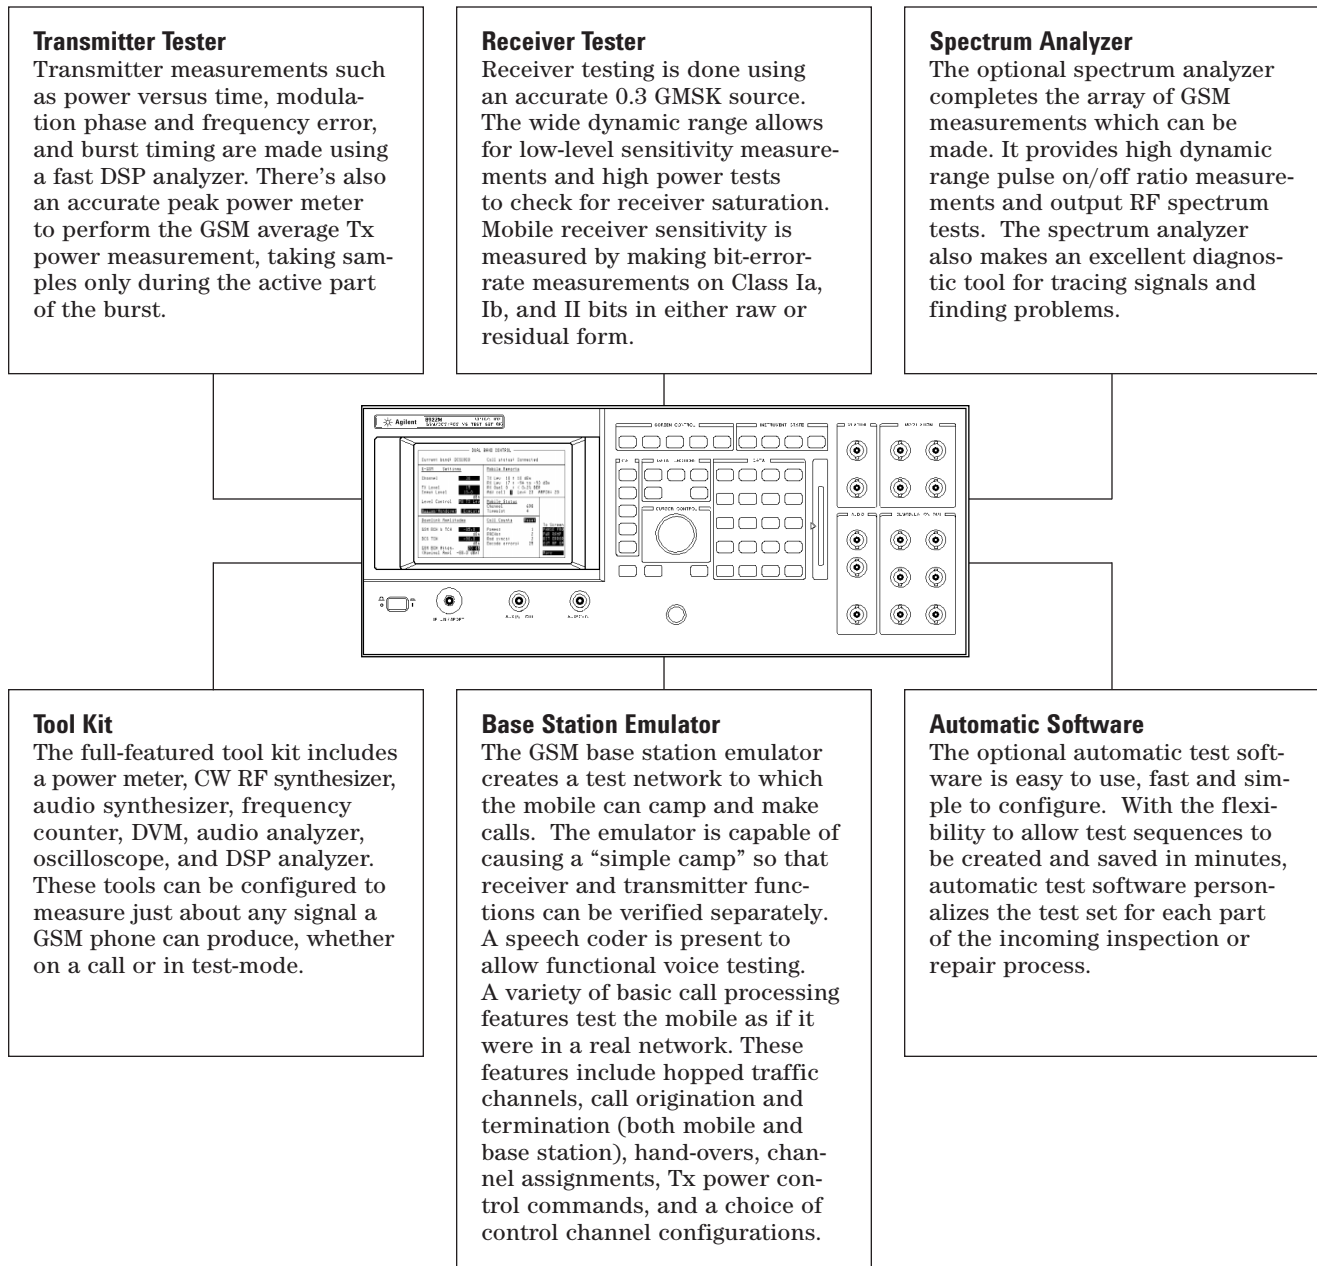

## Troubleshoot in Test Mode

What if the mobile is unable to find service and make a call and you can't find the source of the problem? With a single key press, the test set can be put into a special test mode, allowing unsynchronized mobile operation. The transmit and receive portion of the mobile can then be measured separately.

## Simplify Mobile Test

SIM (Subscriber Identity Module) cards are available to simplify mobile test by matching the information on the card (IMSI, MCC, MNC) with that on the test set. They also enable the mobile to be put into a special loop-back mode to perform the receiver bit-error-rate test.

## Compatibility

If you already own an Agilent 8922S/M or 83220A/E test set, these can be upgraded to 8922 multiband test systems. Contact your Agilent representative for details. You can take advantage of the additional features without rewriting your production test code. Code written for the 8922S/M test set is compatible with the 8922 multiband test systems.

To facilitate traceable testing, the 8922 multiband test system generally follows the procedures as outlined in the associated GSM recommendations, but do not necessarily meet the exact requirements or cover all ranges, limits, or conditions required for type testing.

|  | Associated GSM Specifications |
|--|-------------------------------|
| <b>Agilent 8922 Multiband Test System</b>  | <b>11.10 Tests</b>            |
| Transceiver spurious emissions <sup>1</sup>  | 12.1                          |
| Tx peak transmitted power  | 13.3                          |
| Tx RF spectrum due to switching <sup>2</sup>   | 13.4                          |
| Tx RF spectrum due to modulation <sup>2</sup>  | 13.4                          |
| Tx amplitude envelope (top 30 dB, and -70 dBc point)   | 13.3                          |
| Tx phase error and frequency error   | 13.1                          |
| Rx sensitivity   | 14.2                          |
| Rx usable input level range  | 14.3                          |
| Rx co-channel rejection <sup>3</sup>   | 14.4                          |
| Rx adjacent channel rejection (same frequency/different timeslot) (different frequency/same timeslot) <sup>3</sup> | 14.5                          |
| Rx intermodulation rejection <sup>3</sup>  | 14.6                          |
| Rx blocking and spurious response <sup>4</sup>   | 14.7                          |

1. The 8922 multiband test systems have limited capability for this measurement (<2 GHz, and limited resolution, bandwidth and spans).
2. The 8922 multiband test systems use a three pole resolution bandwidth filter to make these measurements.
3. An additional RF source, such as the ESG-D series of signal generators, is required to make this measurement.
4. An additional CW RF source (frequency range of 100 kHz to 12.75 GHz, no modulation needed) is required to make this measurement.

# GSM Functionality and RF Generator Specifications

## System Specifications

These specifications describe the system's warranted performance and apply after a 30 minute warm-up. These specifications are valid over its operating and environmental range, unless otherwise stated.

## Supplemental Characteristics (*shown in italics*)

These are intended to provide additional information, useful in applying the instrument by giving typical (expected), but not warranted, performance parameters. These characteristics are shown in italics or labeled as "typical," "usable to," or "nominal."

**NOTE:** The following specifications are only applicable to firmware revision C.01.00 onwards.

## GSM Functionality Specifications

**Bit/frame error rate measurements:** Class Ia, Ib, and Class II bits in both raw and residual form, burst-by-burst

**MS power output level control:**

1 to 19 for E-GSM900

1 to 15 for GSM900

0 to 15 for DCS1800

0 to 15, 30, 31 for PCS1900

**Broadcast channel capability:** BCCH + CCCH or BCCH + CCCH + SDCCH/4

**Control channels (SDCCH, FACCH, SACCH):**

BCCH + CCCH, BCCH + CCCH + SDCCH/4, SDCCH/8 (non-hopped), SACCH/FACCH

**Call control capabilities:** BS originated call (FS/EFS), MS originated call (FS/EFS), MS camp-on, BS call disconnect, MS call disconnect, hand-over, channel assignment, interband hand-over<sup>1</sup> and interband channel assignment<sup>1</sup>

**Traffic channels:** TCH (FS/EFS)

**HSCSD:** 2x1 and 2x2, 9.6 Kbps and 14.4 Kbps

**Timing:** Auto, manual, uplink-downlink and offset measurement

**Hopping:** Two independent, user definable MA tables with offsets. Intra band only.

**Speech encoding/decoding:** Full rate speech only

**Speech echo mode:** User selectable delay 0 to 5 seconds

**Measurement coordination:** Flexible control of burst type, ARFCN, and timeslot

**SACCH MEAS result—servicing cell:** RXLEV, RXQUAL, and timing advance

**SACCH MEAS result—neighbor cell:** RXLEV, ARFCN, BCC, and NCC

## RF Generator Specifications

**RF In/Output connector frequency**

**Range:** 880 to 960 MHz and 1805 to 1990 MHz

**Resolution:** 1 Hz

**Accuracy:** Reference accuracy  $\pm 0.5$  Hz

**Stability:** Same as reference

**RF In/Output Connector Output**

**Level range for specified accuracy:**

-14 to -127 dBm (880 to 960 MHz)

-19 to -127 dBm (1805 to 1990 MHz)

**Typical maximum output power:**

>-12 dBm (880 to 960 MHz)

>-19 dBm (1805 to 1990 MHz)

**Level resolution:** 0.1 dB

**Level accuracy (880 to 960 MHz)<sup>2</sup>:**

$\pm 1.1$  dB (0°C to 10°C)

$\pm 1.0$  dB (10°C to 35°C)

$\pm 1.05$  dB (35°C to 45°C)

$\pm 1.1$  dB (45°C to 55°C)

**Level accuracy (1805 to 1880 MHz):**  $\pm 1$  dB

*$\pm 1$  dB typical (1880 to 1990 MHz)*

*$\pm 1$  dB typical while hopping*

**Reverse power:** 15 W peak, 8 W average (880 to 960 MHz while in GSM900 and E-GSM900 mode) 2 W continuous for all other frequencies and modes

**Typical SWR:** 1.5:1

**Supplemental characteristics in E-GSM900 mode when BCH is in GSM900 band and TCH is in DCS1800 band**

**BCH level at 0 dB attenuation:** -60 dBm typical

**Attenuator resolution:** 10 dB steps

**Attenuator range:** 0 to 70 dB

**Attenuator accuracy:**  $\pm 1.7\%$  of setting or  $\pm 0.4$  dB, whichever is greater

**Level resolution for GSM900 BCH:**

0.1 dB (when TCH in GSM900 band)

10 dB (when TCH in DCS1800 band)

**Level accuracy:**

TCH:  $\pm 1$  dB typical

BCH:  $\pm 1$  dB typical (when TCH in GSM900 band)

1. Dual band operation only.

2. Level accuracy degrades 0.2 dB when using RF In/Out connector for both RF generator and RF analyzer.

# Aux RF Out Connector and 0.3 GMSK Modulation Specifications

## 10 MHz to 1 GHz Aux RF Out Connector Specifications

### Frequency

**Range:** 10 MHz to 1 GHz

**Resolution:** 1 Hz

**Accuracy:** Reference accuracy  $\pm 0.5$  Hz

**Stability:** Same as reference

### Output

**Level range for specified accuracy<sup>3</sup>:** +4 to -127 dBm

**Level resolution:** 0.1 dB

**Level accuracy:**

$\pm 1$  dB (880 to 960 MHz)

$\pm 1$  dB typical (50 MHz to 1 GHz)

$\pm 2$  dB typical (10 MHz to 50 MHz)

**Reverse power:** 200 mW

**SWR:** 2.0:1 for level  $< -4$  dBm

## 1710 to 1990 MHz Aux RF Out Connector Specifications (83220A only)<sup>3</sup>

### Frequency

**Range:** 1710 to 1990 MHz

**Resolution:** 1 Hz

**Accuracy:** Reference accuracy  $\pm 0.5$  Hz

**Stability:** Same as reference

### Output

**Level range for specified accuracy:** +7 to -127 dBm

**Level resolution:** 0.1 dB

**Level accuracy<sup>3</sup>:**

$\pm 1$  dB (1710 to 1880 MHz)

$\pm 1$  dB typical (1880 to 1990 MHz)

**Reverse power:** 200 mW

**SWR:** 2.0:1 for level  $< -4$  dBm

### Spectral Purity

**Spurious signals:** (for  $\leq +1$  dBm output level at Aux. RF out, or  $\leq -19$  dBm output level at RF in/out)

**Harmonics:**  $< -25$  dBc

**Non-harmonics:**  $< -50$  dBc,  $> 5$  kHz offset from carrier

## 0.3 GMSK Modulation Specifications

After one timeslot, 577  $\mu$ s, from an isolated RF generator trigger in the GSM frequency bands.

### Error

**Phase error:**  $\leq 1^\circ$  rms

**Peak phase error:**  $\leq 4^\circ$  peak

**Frequency error (880 to 960 MHz):**  $\pm [0.02$  ppm (18 Hz) + reference accuracy], for normal bursts

*Typically  $\pm [0.03$  ppm (27 Hz) + reference accuracy], for RACHs*

**Frequency error (1880 to 1990 MHz):**  $\pm [0.01$  ppm (22 Hz) + reference accuracy], for normal bursts

*Typically  $\pm [0.02$  ppm (32 Hz) + reference accuracy], for RACHs*

**Amplitude flatness:**  $\pm 0.25$  dB peak

**Clock input frequency (8922M only):** 270.833 kHz  $\pm 2$  Hz (relative to reference)

**Level:** TTL

**Data input format (8922M only):** Nondifferentially encoded input

**Level:** TTL

3. Level accuracy degrades 0.2 dB when using RF In/Out connector for both RF generator and RF analyzer.

# Pulse Modulation, RF Analyzer, and CW RF Frequency Measurement Specifications

## **Supplemental characteristics**

After three timeslots, 1.73 ms, from an isolated RF generator trigger in the GSM frequency bands<sup>5</sup>.

**Phase error:**  $\leq 0.5^\circ$  rms

**Peak phase error:**  $\leq 2.0^\circ$  peak

**Frequency error (880 to 960 MHz):**  $\pm[0.01 \text{ ppm (9 Hz)}$

+ reference accuracy] for normal bursts

Typically  $\pm[0.02 \text{ ppm (18 Hz) + reference accuracy}]$

for RACH bursts

**Frequency error (1880 to 1990 MHz):**  $\pm[0.005 \text{ ppm (9 Hz)}$

+ reference accuracy] for normal bursts

Typically  $\pm[0.01 \text{ ppm (18 Hz) + reference accuracy}]$

for RACH bursts

## **Pulse Modulation Specifications**

**Input levels (8922M only):** TTL

**Rise/fall time (10% to 90%):**  $\leq 5 \mu\text{s}$

## **Supplemental characteristics**

**On/off ratio:**  $> 80 \text{ dB}$

## **30 dB Pulse Modulation Specifications**

**(8922M only)**

All timeslots 30 dB higher than desired/active timeslot, to test adjacent timeslot rejection.

**Input levels:** TTL

**Rise/fall time (10% to 90%):**  $\leq 5 \mu\text{s}$

## **RF Analyzer Specifications**

### **RF In/out Connector**

**Frequency range:** 880 to 960 MHz and 1710 to 1990 MHz

**Frequency resolution:** 1 Hz

**Hop mode resolution:** 100 kHz

**Input level range:** -5 to +41 dBm (880 to 960 MHz)

-5 to +32 dBm (1710 to 1990 MHz)

**Typical SWR:** 1.5:1

### **10 MHz to 1 GHz Aux RF In Connector (8922 connector)**

**Frequency range:** 10 MHz to 1 GHz

**Frequency resolution:** 1 Hz

**Hop mode resolution:** 100 kHz

**Input level range:** -36 to +20 dBm

### **1710 to 1990 MHz Aux RF In Connector (83220A only)<sup>4</sup>**

**Frequency range:** 1710 to 1990 MHz

**Frequency resolution:** 1 Hz

**Hop mode resolution:** 100 kHz

**Input level range:** -23 to +20 dBm

## **CW RF Frequency Measurement Specifications**

**Input frequency setting error:**  $\pm 500 \text{ kHz}$

**Accuracy:**  $\pm(1 \text{ Hz} + \text{reference accuracy})$

**Typical minimum resolution:** 1 Hz

4. 8922X and 8922Y systems only.

5. GSM frequency bands are 880 to 915 MHz and 925 to 960 MHz.

# CW RF Power and Peak Transmitter Carrier Power Measurement Specifications

## CW RF Power Measurement Specifications (RF in/out only)

Input frequency setting range:  $\pm 500$  kHz

Accuracy (880 to 960 MHz and +4 to +41 dBm):  $\pm 0.6$  dB  
 $\pm$ noise effects (0.2 mW)

Accuracy (1710 to 1880 MHz and 0 to +32 dBm):  $\pm 0.5$  dB  
 $\pm$ noise effects (0.015 mW)

### Supplemental characteristics

Accuracy (880 to 960 MHz and -5 to +4 dBm):  $\pm 0.5$  dB  
 $\pm$ noise effects (0.2 mW)

Accuracy (1710 to 1880 MHz and -5 to 0 dBm):  $\pm 0.5$  dB  
 $\pm$ noise effects (0.015 mW)

Accuracy (1880 to 1990 MHz):  $\pm 0.5$  dB  $\pm$ noise effects  
(0.015 mW)

Minimum resolution ( $>+4$  dBm): 0.01 dB

## Peak Transmitter Carrier Power Measurement Specifications (RF in/out only)

Input frequency setting range:  $\pm 10$  kHz

Input level setting error:  $\pm 3$  dB

Accuracy (880 to 960 MHz and +4 to +41 dBm):  $\pm 0.7$  dB  
 $\pm$ noise effects (0.2 mW)

Accuracy (1710 to 1880 MHz and 0 to +32 dBm):  $\pm 0.6$  dB  
 $\pm$ noise effects (0.015 mW)

### Supplemental characteristics


Accuracy (880 to 960 MHz and -5 to +4 dBm):  $\pm 0.6$  dB  
 $\pm$ noise effects (0.2 mW)

Accuracy (1710 to 1880 MHz and -5 to 0 dBm):  $\pm 0.6$  dB  
 $\pm$ noise effects (0.015 mW)


Accuracy (1880 to 1990 MHz):  $\pm 0.6$  dB  $\pm$ noise effects  
(0.015 mW)

Minimum resolution ( $>+4$  dBm): 0.2 dB


Refer to the following four graphs for typical power measurement accuracies.

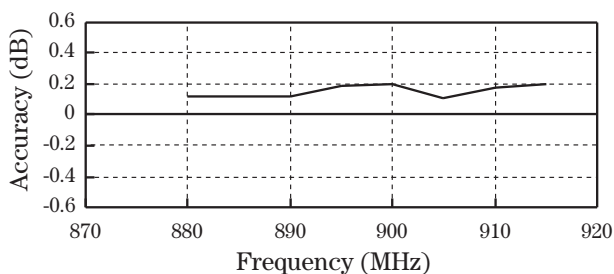


Measurement Power Level is +33 dBm

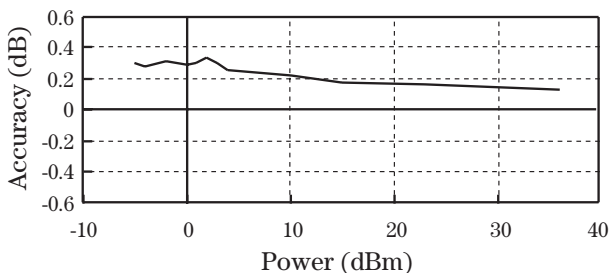

Measurement Frequency is 975 MHz

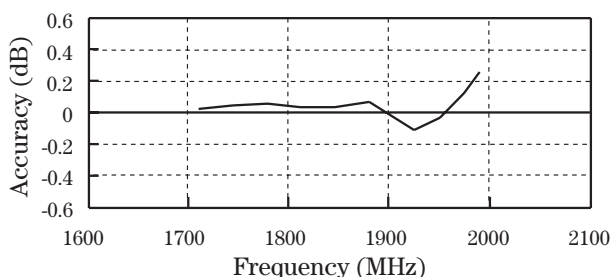

Measurement Power Level is 0 dBm

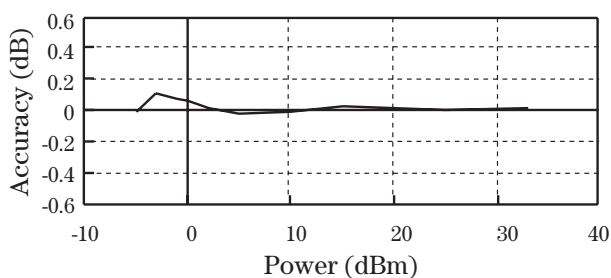

Measurement Frequency is 1880 MHz

# Pulse On/Off Ratio, Amplitude Envelope, and Phase and Frequency Measurement Specifications

## Pulse On/Off Ratio Measurement Specifications (Requires Option 006)

“On” power is averaged over the useful part of the burst. “Off” is averaged over a one-bit interval centered at a user specified time.

### Non-hopped Mode Only

**Input frequency setting range:**  $\pm 10$  kHz

**Input level setting range:**  $\pm 3$  dB

**Timing accuracy:**  $\pm 1.7$   $\mu$ s (*1.1  $\mu$ s typical*)

### Accuracy (On/off $\geq 40$ dB, RF in/out only)

| Off power (dBm) | On/off ratio accuracy |                         |
|-----------------|-----------------------|-------------------------|
| -30 to -1       | 2.4 dB                | <i>1.1 dB typically</i> |
| -37 to -30      | 2.9 dB                | <i>1.3 dB typically</i> |
| -41 to -37      | 3.7 dB                | <i>1.7 dB typically</i> |
| -47 to -42      | 4.2 dB                | <i>2.1 dB typically</i> |

## Amplitude Envelope Measurement Specifications

After one timeslot, 577  $\mu$ s from an isolated receiver hop trigger in the GSM frequency bands.

**Input frequency setting range:**  $\pm 10$  kHz

### Inaccuracy due to noise (for overshoots 1 dB)

| Relative level | Input level setting error |                        |                            |
|----------------|---------------------------|------------------------|----------------------------|
|                | $\pm 1$ dB                | $\pm 3$ dB             | $\pm 3$ dB with 5 averages |
| 0 dB           | $< \pm 0.15$ dB peak      | $< \pm 0.2$ dB peak    | $< \pm 0.2$ dB peak        |
| -6 dB          | $< \pm 0.2$ dB            | $< \pm 0.3$ dB         | $< \pm 0.3$ dB             |
| -30 dB         | $< +3.0$ dB<br>-3.8 dB    | $< +4.2$ dB<br>-7.5 dB | $< +2.2$ dB<br>-2.6 dB     |

## Phase and Frequency Measurement Specifications


After one timeslot, 577  $\mu$ s from an isolated hop trigger in the GSM/DCS/PCS frequency bands.

**Input frequency setting range:**  $\pm 10$  kHz

**Input level setting range:**  $\pm 3$  dB

**RMS phase error accuracy:**  $\leq 1^\circ$  rms

### RMS phase error measurement versus measured value

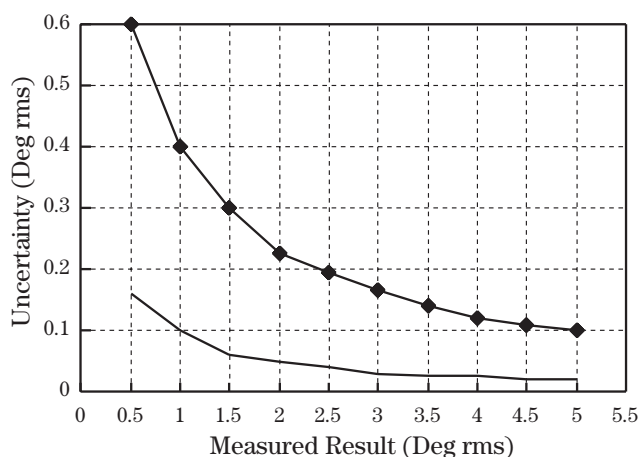

◆ Specified — Typical

**Peak phase error accuracy:**  $\leq 4^\circ$  peak

**Frequency error accuracy:**  $\pm(22$  Hz + reference accuracy), for normal bursts

### Supplemental characteristics

#### Frequency error accuracy:

$\pm(9$  Hz + reference accuracy) for normal bursts

$\pm(18$  Hz + reference accuracy) for RACHs

# 0.3 GSMK Data Recovery, FM Demodulation Output, Pulse Demodulation Output, and Output RF Spectrum Measurement Specifications

## 0.3 GSMK Data Recovery Specifications (8922M only)<sup>6</sup>

After one timeslot, 577  $\mu$ s, from an isolated receiver hop trigger in the GSM frequency bands.

**Input frequency setting error:**  $\pm 100$  Hz

**Required input phase accuracy:**  $\leq 5^\circ$  rms,  $\leq 20^\circ$  peak

**Demodulation duty cycle:** 1 timeslot per frame

**Outputs:** Data, clock and data valid

**Data output clock:** Clocked at 1 MHz rate

**Delay, data:**  $\leq 1$  frame (4.62 ms)

**Output level:** TTL

## FM Demodulation Output Specifications (8922M only)<sup>6</sup>

**Sensitivity:** 20  $\mu$ V/Hz  $\pm 5\%$  (into an open circuit)

**Input frequency setting range:**  $\pm 50$  kHz, with  $\leq 100$  kHz peak deviation

**Input level setting range:**  $\pm 3$  dB

### Supplemental characteristics

**3 dB bandwidth:** DC to 270 kHz

**Output impedance:** 600  $\Omega$

**DC offset:**  $\leq 5$  mV

## Pulse Demodulation Output Specifications (8922M only)<sup>6</sup>

**Input frequency setting range:**  $\pm 50$  kHz

**Input level setting range:**  $\pm 3$  dB

**Rise time (10 to 90%):**  $\leq 2.5$   $\mu$ s

## Output RF Spectrum Measurement Specifications (Requires Option 006)

After one timeslot, 577  $\mu$ s, from an isolated receiver hop trigger in the GSM frequency bands.

**Input levels for optimum dynamic range (RF In/Out connector):**

+7, +17, +27, +37 dBm

(from 880 to 960 MHz)

-3, +2, +7, +12, +17, +22, +27, +32 dBm

(from 1710 to 1990 MHz)

**Input frequency setting range:**  $\pm 10$  kHz

**Input level setting range:**  $\pm 3$  dB

### Supplemental characteristics

**Log linearity:**  $\pm 0.4$  dB

**Amplitude flatness:**  $\pm 1.0$  dB

**Amplitude resolution:** 0.4 dB

**Dynamic range (dB):** This describes the spectrum analyzer resolution bandwidth filter used when measuring output RF spectrum. The dynamic range of the measurement will be a combination of this filter response and the modulation spectrum of the incoming signal.

| Range (dB) | Offset (kHz) |     |     |     |     |             |
|------------|--------------|-----|-----|-----|-----|-------------|
|            | 100          | 200 | 300 | 400 | 600 | 800 to 1800 |
|            | 24           | 42  | 53  | 60  | 63  | 64          |

When using output RF spectrum due to the ramping measurement, the dynamic range is decreased by 12 dB (due to peak hold).

6. 8922P, 8922X systems

# Spectrum Analyzer and Audio Source Specifications

## Spectrum Analyzer Specifications (Requires Option 006)

### Frequency Span/Resolution Bandwidth (coupled)

| Span     | Bandwidth |
|----------|-----------|
| <50 kHz  | 300 Hz    |
| <200 kHz | 1 kHz     |
| <1.5 MHz | 3 kHz     |
| ≤4 MHz   | 30 kHz    |

**Display:** Log, 10 dB/div

**Display range:** 80 dB

**Log linearity:** ±1.1 dB

**Reference level range for (RF In/Out connector):**

+44 to -24 dBm (880 to 960 MHz)

+35 to -45 dBm (1710 to 1990 MHz)

**Non-harmonic spurious responses:** -50 dBc max,  
for inputs ≤30 dBm

**Residual responses:** < -70 dBm (no input signal,  
0 dB attenuation)

**Image rejection:** > 50 dB

**In PCS1900 band only the ORFS and spectrum analyzer  
specifications do not apply over this range:**

1904 to 1906 MHz, corresponding to ARFCN 781 to 791

### Supplemental characteristics

**Level accuracy:** ±2.5 dB

**Frequency over range:** To 1015 MHz (GSM900, E-GSM900)

**Displayed average noise level:** <-116 dBm  
(0 dB attenuation, < 50 kHz spans)

### Frequency Span/Resolution Bandwidth (coupled)

| Span    | Bandwidth |
|---------|-----------|
| <50 MHz | 30 kHz    |

## Audio Source Specifications

### Frequency

**Range:** DC to 25 kHz

**Accuracy:** 0.025% of setting

### Supplemental characteristics

**Minimum resolution:** 0.1 Hz

### Output Level

**Range:** 0.1 mV to 4 V<sub>rms</sub>

**Maximum output current:** 20 mA peak

**Output impedance:** <1 Ω

**Accuracy:** ±(2% of setting + resolution)

**Residual distortion (THD + noise, amplitude >200 mV<sub>rms</sub>):**  
0.1%, 20 Hz to 25 kHz in 80 kHz BW

### Supplemental characteristics

**Minimum resolution:**

Level ≤0.01 V: 50 μV

Level ≤0.1 V: 0.5 mV

Level ≤1 V: 5 mV

Level >1 V: 50 mV

**DC coupled offset:** <50 mV

## Audio Analyzer Specifications

### Frequency Measurement

**Range:** 20 Hz to 400 kHz

**Accuracy:** ±(0.02% + 1 count + reference accuracy)

**External input:** 20 mV<sub>rms</sub> to 30 V<sub>rms</sub>

### Supplemental characteristics

**Minimum resolution:**

f <10 kHz: 0.01 Hz

f <100 kHz: 0.1 Hz

f ≥100 kHz: 1 Hz

### AC Voltage Measurement

**Voltage range:** 0 V to 30 V<sub>rms</sub>

**Accuracy (20 Hz to 15 kHz), input >1 mV<sub>rms</sub>:**  
±3% of reading

**Residual noise + THD (15 kHz BW):** 175 μV

# Audio Analyzer and Oscilloscope, Remote Programming, and Printer Support Specifications

## Supplemental characteristics

**3 dB bandwidth:** 2 Hz to 100 kHz

**Input impedance:** 1 MΩ, 145 pF at audio in

**Minimum resolution:** 4 digits for inputs ≥100 mV 3 digits for inputs <100 mV

## DC Voltage Measurement

**Voltage range:** 100 mV to 42 V

**Accuracy:** ±(1.0% of reading + DC offset)

**DC offset:** ±45 mV

## Supplemental characteristics

**Minimum resolution:** 1.0 mV

## Distortion Measurement

**Fundamental frequency:** 1 kHz ±5 Hz

**Input level range:** 30 mVrms to 30 Vrms

**Display range:** 0.1% to 100%

**Accuracy:** ±1 dB (0.5 to 100% distortion)

**Residual THD + noise (15 kHz BW):** The greater of -60 dB or +175 μV

## Supplemental characteristics

**Minimum resolution:** 0.01% distortion

## Audio Filters

**There are seven audio filters used in the 8922 test set:**

50 Hz HPF, 300 Hz HPF, 300 Hz LPF, 3 kHz LPF, 15 kHz LPF, 750 μs de-emphasis, and 1 kHz notch.

## Audio Detectors

**The audio detectors available in the 8922 are:**

Pk+, pk-, pk + hold, pk - hold, pk±/2, pk ±/2 hold, pk±max, pk±max hold, and RMS.

## Oscilloscope Specifications

**Frequency range (3 dB):** 2 Hz to 50 kHz

**Scale/division:** 10 mV to 10 V in 1, 2, 5, and 10 steps

**Amplitude accuracy (20 Hz to 10 kHz):** ±1.5% of reading 0.1 division

**Time/division:** 10 μs to 100 ms in 1, 2, 5 and 10 steps

**External trigger level:** TTL

**Maximum voltage scope in:** 5 V<sub>peak</sub>

**Audio in:** 30 V<sub>rms</sub>

## Supplemental characteristics

**3 dB bandwidth:** Typically >100 kHz

**Internal DC offset:** ≤0.1 division for ≤50 μV/div sensitivity

## Remote Programming

**GPIB:** Agilent's implementation of IEEE Standard 488.2

**Functions implemented:** SH1, AH1, T6, L4, SR1, RL1, LE0, TE0, PP0, DC1, DT1, C4, C11, E2

**RS-232:** 3 wire RJ-11 connector used for serial data transfer

**Baud rates:** 150, 300, 600, 1200, 2400, 4800, 9600, and 19200 selectable

## Printer Support


**RS-232:** 3-wire RJ-11 connector used for serial data transfer

## Parallel Port

This port is used with printers requiring a parallel interface when printing. Use address 15 when sending data to this port from IBASIC Programs.

Pin assignments are as follows:

|    |  |
|----|--|
| 1  | nStrobe                                      |
| 2  | Data 1 (Least significant bit)               |
| 3  | Data 2                                       |
| 4  | Data 3                                       |
| 5  | Data 4                                       |
| 6  | Data 5                                       |
| 7  | Data 6                                       |
| 8  | Data 7                                       |
| 9  | Data 1 (Most significant bit)                |
| 10 | nAck   |
| 11 | Busy   |
| 12 | PError                                       |
| 13 | Select                                       |
| 14 | nAutoFd                                      |
| 15 | nFault                                       |
| 16 | nInit  |
| 17 | nSelectIn                                    |
| 18 | Signal Ground (nStrobe)                      |
| 19 | Signal Ground (Data 1 and Data 2)            |
| 20 | Signal Ground (Data 3 and Data 4)            |
| 21 | Signal Ground (Data 5 and Data 6)            |
| 22 | Signal Ground (Data 7 and Data 8)            |
| 23 | Signal Ground (Busy and nFault)              |
| 24 | Signal Ground (PError, Select and nAck)      |
| 25 | Signal Ground (nAutoFd, nSelectIn and nInit) |



# Reference and General Specifications

## Reference Specifications

The accuracy needs for testing GSM radios require the unit to be operated with the high stability reference (Option 001) or an external high stability reference.

**Accuracy (after warm up):**  $\pm[(\text{Time since calibration} \times \text{aging rate}) + \text{temperature effects} + \text{accuracy of calibration}]$

**External reference input frequency:** 13, 10, 5, 2 or 1 MHz,  $\pm 30$  ppm

**Level:** 0 to +10 dBm

### Supplemental characteristics

**Nominal impedance:** 50  $\Omega$

**10 MHz out (rear panel BNC) level:**  $> +8.0$  dBm nominal

**Impedance:** 50  $\Omega$  nominal

**13 MHz out (rear panel BNC) level:**  $> +8.0$  dBm nominal

**Impedance:** 50  $\Omega$  nominal

### Fixed Reference Mode

**Aging:**  $< 2$  ppm/year

**Temperature stability:**  $\pm 1$  ppm (0° to 55°C)

**Warm-up time:**  $< 30$  minutes,  $\pm 2$  ppm of final frequency

### Tunable Reference Mode

This allows offsetting the internal reference by a selected amount relative to the high stability reference (Option 001) or an external reference.

**Required external reference accuracy:**  $\pm 0.5$  ppm

**Tune range:**  $\pm 30$  ppm

**Reference accuracy:**  $\pm 1$  ppm + accuracy of external reference or high stability (Option 001)

**Temperature stability:**  $\leq 4$  ppm, for selected offsets of up to  $\pm 30$  ppm

## General Specifications

**Size:** 8922 + 83220: 310H x 426W x 574D (mm)  
(12.25 x 16.75 x 23 inches)

**Weight:** 8922 + 83220: 48.8 kg, 107 lbs

**Operating temperature:** 0° to +55°C

**Storage temperature:** -40° to +70°C

**Power:** 100, 120, 220, 240 Vac, 48 to 440 Hz  $\pm 12\%$  of line voltage, approximately 640 VA

**Safety (8922):** Certified to IEC 348:1978 and CSA-22.2, No. 231 Series M89

**Safety (83220):** Certified to IEC 348:1978 and CSA Bulletin 556B

**EMI:** Meets the requirements of the European, EMC directive 89/336/EEC

**Video output:** The video out connector on the rear panel outputs a 15 kHz PAL CVBS under-scanning compatible signal

# Options, System Configurations, Printers, and Printer Accessories

## 8922P and 8922X

### GSM Multiband Test System

- Option 001:** High stability timebase
- Option 002:** Transit protection (provides front panel cover, and extended rear feet)
- Option 003:** Protocol logging
- Option 006:** Spectrum analyzer
- Option 007:** Test SIM card
- Option 008:** Micro test SIM card
- Option 012:** Mobile station test software (83212C)
- Option 0B0:** Delete manual set
- Option 0B1:** Additional set of user guides and programming reference guide
- Option 0B3:** Service manual
- Option AB0:** Taiwan-Chinese localization
- Option AX4:** Rack mount flange kit
- Option DB2:** Add multiband calibration kit
- Option UK6:** Commercial calibration certificate with data

### Multiband System Configuration

- 8922P** = 8922M Option 010 + 83220E Option 010
- 8922X** = 8922M Option 010 + 83220A Option 010
- 8922R** = 8922S Option 010 + 83220E Option 010
- 8922Y** = 8922S Option 010 + 83220A Option 010

### Multiband System Upgrades

- 8922P/R/X/Y Option R01:** Field upgrade of 8922S/M to 8922S/M Option 010.  
Includes new 83220A/E Option 010.
- 8922P/R/X/Y Option R02:** Field upgrade of 8922S/M to 8922S/M Option 010.  
83220A/E is returned to factory for upgrade to 83220A/E Option 010.
- 8922U Option 104:** Multiband test system calibration kit.  
This kit of parts is not included as standard with the 8922P/R/X/Y or the multiband upgrade Options R01/R02.

## 8922R and 8922Y

### GSM Multiband Test System

- Option 001:** High stability timebase
- Option 002:** Transit protection (provides front panel cover, and extended rear feet)
- Option 006:** Spectrum analyzer
- Option 007:** Test SIM card
- Option 008:** Micro test SIM card
- Option 012:** Mobile station test software (83212C)
- Option 0B0:** Delete manual set
- Option 0B1:** Additional set of user guides and programming reference guide
- Option 0B3:** Service manual
- Option AB0:** Taiwan-Chinese localization
- Option AX4:** Rack mount flange kit
- Option DB2:** Add multiband calibration kit
- Option UK6:** Commercial calibration certificate with data

### Supported Printers and Printer Accessories

#### HP DeskJet 500, 500C, 550C, and 560C

GPIB, RS-232, and Centronics\* interfaces are supported.

\*Operation with Centronics printers requires the following accessories:

- ITEL-45CHVE:** MicroPrint GPIB/Centronics bus converter
- F1011A:** AC/DC adapter
- C2912B:** 3m centronics cable
- 10833D:** 0.5m GPIB cable
- 8922S/M test set (Special Option K06):** Serial printer connector and cable (RJ11 to D-type RS-232)

# Upgrade Information and Features Comparison

## 8922F/H to 8922S/M Test Set Upgrades

Keeping in line with our policy to offer continual enhancements for our instruments, customers who already have an 8922F or 8922H may upgrade them to the functionality of the 8922S or 8922M respectively. The electronic attenuator is not included in the upgrade.

The upgrades are in the form of retrofit kits which must be installed at an Agilent service center.

The upgrades are structured as options on an 8922U product. The 8922U does not exist as a product in its own right, only the options may be ordered.

### Ordering Information

**8922U Option 101:** Upgrade 8922H test set to 8922M test set excluding electronic attenuator.

For 8922G Option R10, 8922G Option R72, and 8922H (all options).

**8922U Option 102:** Upgrade 8922F test set to 8922S test set excluding electronic attenuator.

For 8922E Option R12, 8922E Option R71, 8922E Option R73, and 8922F (all options).

### General Comments

The 8922S/M are software compatible with the 8922F/H test set. There will still be an 8922G compatibility mode for backwards compatibility with existing test software.

### Related Literature

**Agilent 8922M** test set photocard

**Agilent 8922S** test set photocard

**Agilent 8922S/M** data sheet

### Pub. Number

5964-6587E

5964-6585E

5964-6586E

| 8922S and 8922F feature differences | 8922S                              | 8922F                |
|-------------------------------------|------------------------------------|----------------------|
| Measurement speed                   | Approx. 10% increase in throughput | N/A                  |
| Multi-burst measurement capability  | Yes                                | No                   |
| GSM phase II power levels           | Yes                                | No                   |
| E-GSM frequency bands               | Yes                                | No                   |
| Electronic attenuator               | Yes                                | No                   |
| SMS cell broadcast                  | Yes                                | No                   |
| Peak carrier power meter range      | -5 to +41 dBm                      | +4 to +41 dBm        |
| RF generator power level range      | -14 to -127 dBm                    | -13 to -127 dBm      |
| Burst-by-burst BER measurement      | Yes                                | No                   |
| Screen freeze facility              | Yes                                | No                   |
| IMSI attach/detach function         | Yes                                | No                   |
| 8922M and 8922H feature differences | 8922M                              | 8922H                |
| Measurement speed                   | 10 to 20% increase in throughput   | N/A                  |
| Multi-burst measurement capability  | Yes                                | No                   |
| GSM phase II power levels           | Yes                                | Yes with FW >B.06.00 |
| E-GSM frequency bands               | Yes                                | No                   |
| Electronic attenuator               | Yes                                | No                   |
| SMS cell broadcast                  | Yes                                | Yes with FW >B.06.00 |
| Peak carrier power meter range      | -5 to +41 dBm                      | +4 to +41 dBm        |
| RF generator power level range      | -14 to -127 dBm                    | -13 to -127 dBm      |
| Burst-by-burst BER measurement      | Yes                                | No                   |
| Screen freeze facility              | Yes                                | No                   |
| Flash firmware upgrades by GPIB     | Yes                                | No                   |
| IMSI attach/detach function         | Yes                                | Yes with FW >B.06.00 |

**Agilent Technologies' Test and Measurement Support, Services, and Assistance**

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

**Our Promise**

"Our Promise" means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

**Your Advantage**

"Your Advantage" means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test and measurement needs.

**Online Assistance**

[www.agilent.com/find/assist](http://www.agilent.com/find/assist)

**Phone or Fax**

United States:

(tel) 1 800 452 4844

Canada:

(tel) 1 877 894 4414

(fax) (905) 206 4120

Europe:

(tel) (31 20) 547 2323

(fax) (31 20) 547 2390

Japan:

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

Latin America:

(tel) (305) 267 4245

(fax) (305) 267 4286

Australia:

(tel) 1 800 629 485

(fax) (61 3) 9272 0749

New Zealand:

(tel) 0 800 738 378

(fax) (64 4) 495 8950

Asia Pacific:

(tel) (852) 3197 7777

(fax) (852) 2506 9284

Product specifications and descriptions in this document subject to change without notice.

Copyright © 1997, 2000 Agilent Technologies

Printed in U.S.A. 4/00

5966-1617E



**Agilent Technologies**

Innovating the HP Way