



Applications

- Low voltage, high density systems with Intermediate Bus Architectures (IBA)
- Point-of-load regulators for high performance DSP, FPGA, ASIC, and microprocessors
- Desktops, servers, and portable computing
- Broadband, networking, optical, and communications systems

Benefits

- One part that covers many applications
- Reduces board space, system cost and complexity, and time to market

Description

Power-One's point-of-load converters are recommended for use with regulated bus converters in an Intermediate Bus Architecture (IBA). The YH09T40-0 non-isolated DC-DC point of load (POL) converter delivers up to 40A of output current in an industry-standard horizontal through-hole package. The YH09T40-0 POL converter is an ideal choice for Intermediate Bus Architectures where point of load conversion is a requirement.

Operating from a 5-13.8V input the POL converter provides an extremely tightly regulated programmable output voltage of 0.6 V to 3.63V. The POL converter offers exceptional thermal performance, even in high temperature environments with minimal airflow. This performance is accomplished through the use of advanced circuit solutions, packaging and processing techniques. The resulting design possesses ultra-high efficiency, excellent thermal management, and a slim body profile that minimizes impedance to system airflow, thus enhancing cooling for both upstream and downstream devices. The use of automation for assembly, coupled with advanced power electronics and thermal design, results in a product with extremely high reliability.

Features


- RoHS lead free and lead-solder-exempt products are available
- High efficiency multiphase synchronous buck topology
- Low noise fixed frequency operation
- Wide input voltage range: 5V–13.8V
- High continuous output current: 40A
- Programmable output voltage range: 0.6V–3.63V
- Overcurrent, output overvoltage, and overtemperature protections with automatic restart
- Remote differential output voltage sense
- Power Good signal
- Enable input
- Start up into prebiased load
- No minimum load requirements
- High MTBF of 40.5 Million hours
- Industry standard size through-hole low profile package and pinout
 - 1.45"x1.115" (36.83mm x 28.32mm)
- Low height of 0.5" (12.7mm)
- Wide operating temperature range: 0 to 70°C
- UL94 V-0 flammability rating
- UL60950, CSA C22.2 No. 60950-00, and TUV EN60950-1:2001

1. Ordering Information

| Y | H | 09 | T | 40 | - | 0 | z |
|----------------|------------|---------------|--------------|----------------|------|----------------|---|
| Product Family | Profile | Input Voltage | PCB Mounting | Output Current | Dash | ON/OFF Logic | RoHS compliance |
| POL Converter | Horizontal | 5V to 13.8V | Through-hole | 40A | | Positive Logic | No suffix - RoHS compliant with Pb solder exemption ¹ G - RoHS compliant for all six substances |

¹ The solder exemption refers to all the restricted materials except lead in solder. These materials are Cadmium (Cd), Hexavalent chromium (Cr6+), Mercury (Hg), Polybrominated biphenyls (PBB), Polybrominated diphenylethers (PBDE), and Lead (Pb) used anywhere except in solder.

Example: **YH09T40-0G**: YH09T40-0 POL converter with lead-free solder.

 Model numbers highlighted in yellow or shaded are not recommended for new designs.

2. Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings may cause performance degradation, adversely affect long-term reliability, and cause permanent damage to the converter.

| Parameter | Conditions/Description | Min | Max | Units |
|---------------------------|-------------------------|------|-----|-------|
| Input Voltage | Continuous | -0.3 | 15 | VDC |
| Ambient Temperature Range | Operating | 0 | 70 | °C |
| Storage Temperature (Ts) | | -55 | 125 | °C |
| Case Temperature (Tc) | Measured on MOSFET Q120 | | 120 | °C |

3. Environmental and Mechanical Specifications

| Parameter | Conditions/Description | Min | Nom | Max | Units |
|--------------|--|----------------|------|-----|-------|
| Weight | | | 16.4 | | grams |
| MTBF | Calculated Per Telcordia Technologies SR-332, Method I Case 1 50% electrical stress, 40°C ambient | | 40.5 | | MHrs |
| Lead Plating | YH09T40-0 and YH09T40-0G | 100% Matte Tin | | | |

4. Electrical Specifications

Specifications apply at the input voltage from 5V to 13.8V, output load from 0 to 40A, output voltage from 0.6V to 3.63V, 470μF external output capacitor, and ambient temperature from 0°C to 70°C unless otherwise noted.

4.1 Input Specifications

| Parameter | Conditions/Description | Min | Nom | Max | Units |
|---|---|------|-----|------|-------|
| Input voltage (V_{IN}) | $V_{OUT} \leq 0.55 \cdot V_{IN}$ | 5 | 12 | 13.8 | VDC |
| Undervoltage Lockout Turn On Threshold | Input Voltage Ramping Up | 4.25 | 4.5 | 4.75 | VDC |
| Undervoltage Lockout Turn Off Threshold | Input Voltage Ramping Down | 3.75 | 4.0 | 4.25 | VDC |
| Standby Input Current | $V_{IN}=12V$, POL is disabled via ON/OFF | | 16 | | mADC |
| Maximum Input Current | $V_{IN}=6V$, $V_{OUT}=3.3V$ | | | 25 | ADC |
| Input Reflected Ripple Current Peak-to-Peak | BW=5MHz to 20MHz, $L_{SOURCE}=1\mu H$, See Figure 20 for setup | | 130 | | mA |

4.2 Output Specifications

| Parameter | Conditions/Description | Min | Nom | Max | Units |
|---|--|------|-------|------|-------------|
| Output Voltage Range (V_{OUT}) | Programmable with a resistor between TRIM+ and TRIM- pins | 0.6 | | 3.63 | VDC |
| Output Voltage Setpoint Accuracy, $V_{OUT} \geq 1V$ | $V_{IN}=12V$, $I_{OUT}=I_{OUT\ MAX}$, 0.1% trim resistor, room temperature | -0.8 | | 0.8 | % V_{OUT} |
| Output Voltage Setpoint Accuracy, $V_{OUT} < 1V$ | $V_{IN}=12V$, $I_{OUT}=I_{OUT\ MAX}$, 0.1% trim resistor, room temperature | -7 | | 7 | mVDC |
| Line Regulation, $V_{OUT} \geq 2.5V$ | $V_{IN\ MIN}$ to $V_{IN\ MAX}$ | | | 0.4 | % V_{OUT} |
| Load Regulation, $V_{OUT} \geq 2.5V$ | 0 to $I_{OUT\ MAX}$ | | | 0.6 | % V_{OUT} |
| Line Regulation, $V_{OUT} < 2.5V$ | $V_{IN\ MIN}$ to $V_{IN\ MAX}$ | | | 9 | mVDC |
| Load Regulation, $V_{OUT} < 2.5V$ | 0 to $I_{OUT\ MAX}$ | | | 12 | mVDC |
| Output Voltage Regulation | Over operating input voltage, resistive load, and temperature conditions until the end of life | -1.1 | | 1.1 | % V_{OUT} |
| Output Voltage Peak-to-Peak Ripple and Noise, BW=20MHz, Full Load | $V_{IN}=12V$, $V_{OUT}=0.6V$ | | 25 | 30 | mV |
| | $V_{IN}=12V$, $V_{OUT}=2.5V$ | | 30 | 40 | mV |
| | $V_{IN}=12V$, $V_{OUT}=3.3V$ | | 35 | 50 | mV |
| Dynamic Regulation Peak Deviation Settling Time | $V_{IN}=12V$, 50 - 100% load step, Slew rate 1A/μs, to 10% of peak deviation | | 70 | | mV |
| | | | 50 | | μs |
| Efficiency $V_{IN}=12V$ Full Load Room temperature | $V_{OUT}=0.6V$ | | 73 | | % |
| | $V_{OUT}=1.2V$ | | 84 | | % |
| | $V_{OUT}=2.5V$ | | 91 | | % |
| | $V_{OUT}=3.3V$ | | 93 | | % |
| Switching Frequency | 2 phases combined | | 1,000 | | kHz |

| Parameter | Conditions/Description | Min | Nom | Max | Units |
|---|--|-----|-----|-------|---------|
| Turn-On Delay Time ¹ POL is Enabled | ON/OFF pin is pulled high From $V_{IN}=V_{IN\ MIN}$ to $V_{OUT}=0.1*V_{OUT.SET}$ | | 0.4 | 1 | ms |
| Turn-On Delay Time ¹ POL is Disabled | $V_{IN}=12V$ From ON/OFF pin changing its state from low to high until $V_{OUT}=0.1*V_{OUT.SET}$ | | 0.4 | 1 | ms |
| Rise Time ¹ $C_{OUT}=0\ \mu F$, Resistive Load | From $V_{OUT}=0.1*V_{OUT.SET}$ to $V_{OUT}=0.9*V_{OUT.SET}$ | | 1.2 | 2 | ms |
| Admissible Output Capacitance $V_{OUT}\leq 2.5V$ | $I_{OUT}=I_{OUT\ MAX}$, Resistive load, ESR>2.5m Ω | | | 5,000 | μF |
| Admissible Output Capacitance $V_{OUT}\geq 2.5V$ | $I_{OUT}=I_{OUT\ MAX}$, Resistive load, ESR>2.5m Ω | | | 2,200 | μF |

¹ Total start-up time is the sum of the turn-on delay time and the rise time

4.3 Protection Specifications

| Parameter | Conditions/Description | Min | Nom | Max | Units |
|---|---|--------------|-----|------|---------------|
| Output Overcurrent Protection | | | | | |
| Type | | Auto-Restart | | | |
| Inception Point | | 110 | 130 | 150 | % I_{OUT} |
| Output Short Circuit Current (RMS value) | $V_{OUT}=2.5V$, $R_{OUT}<0.01\Omega$ | | 6 | | A |
| Output Overvoltage Protection | | | | | |
| Type | | Auto-Restart | | | |
| Threshold | $I_{OUT}=I_{OUT\ MAX}$, room temperature | 120 | 125 | 130 | % $V_{O.SET}$ |
| Overtemperature Protection | | | | | |
| Type | | Auto-Restart | | | |
| Turn Off Threshold | Temperature is increasing | | 125 | | °C |
| Turn On Threshold | Temperature is decreasing after the POL was shut down by OTP | | 115 | | °C |
| Power Good Signal (PwrGood pin) | | | | | |
| Logic | V_{OUT} is inside the PG window V_{OUT} is outside the PG window | High Low | | | N/A |
| Low Output Voltage | $I_{SINK}=4mA$ | | | 0.5 | VDC |
| High Output Voltage | External pull-up | 2.4 | | 5.25 | VDC |

4.4 Feature Specifications

| Parameter | Conditions/Description | Min | Nom | Max | Units |
|--|---|------|-----|---------------------|-------|
| Enable (ON/OFF pin) | | | | | |
| ON/OFF Logic | Positive (enables the output when ON/OFF pin is open) | | | | N/A |
| ON/OFF High Input Voltage | POL is ON | 2.4 | | V _{IN.MAX} | VDC |
| ON/OFF High Input Current | POL is ON | | | 0.5 | mADC |
| ON/OFF Low Input Voltage | POL is OFF | -0.3 | | 1.2 | VDC |
| ON/OFF Low Input Current | POL is OFF | | | 0.12 | mADC |
| Remote Voltage Sense (+VS and -VS pins) | | | | | |
| Voltage Drop Compensation ¹ | | | | 500 | mV |

¹ The output voltage measured directly between Vout and GND pins shall never exceed 3.63V

5. Typical Performance Characteristics

5.1 Efficiency Curves

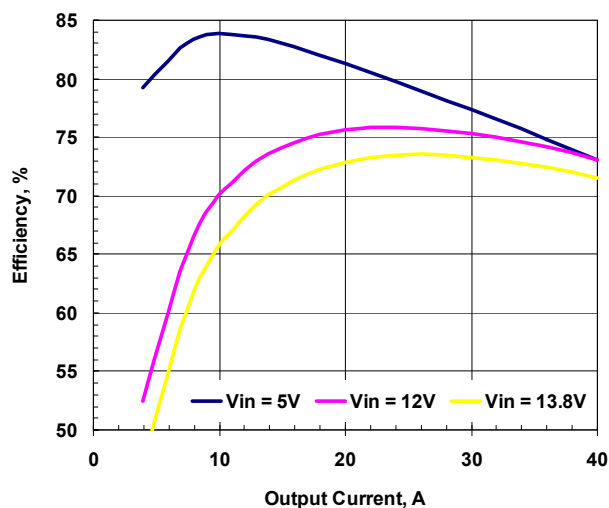


Figure 1. Efficiency vs. Load. Vout=0.6V

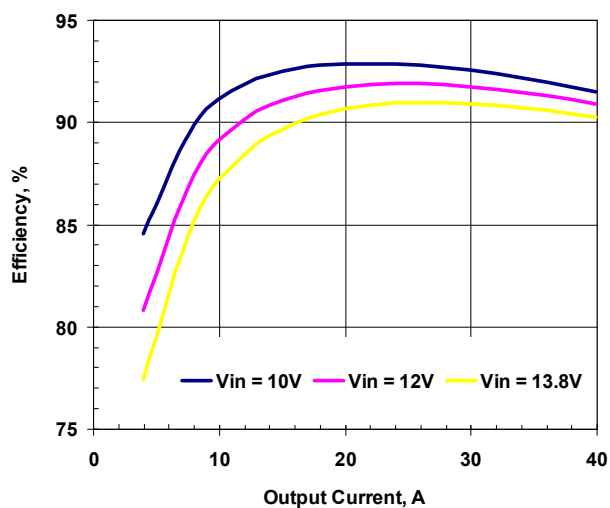


Figure 3. Efficiency vs. Load. Vout=2.5V

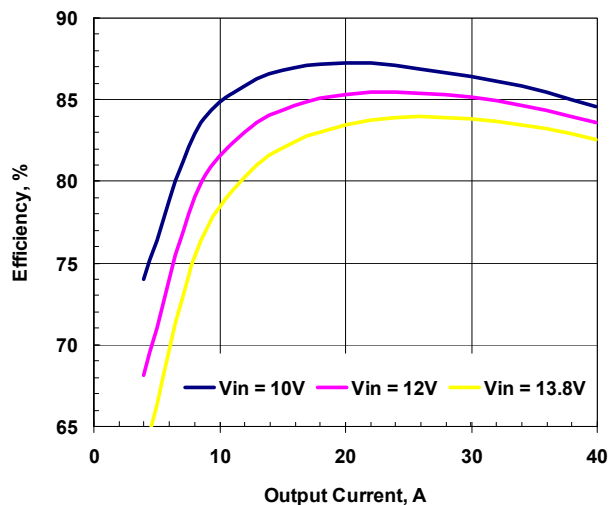


Figure 2. Efficiency vs. Load. Vout=1.2V

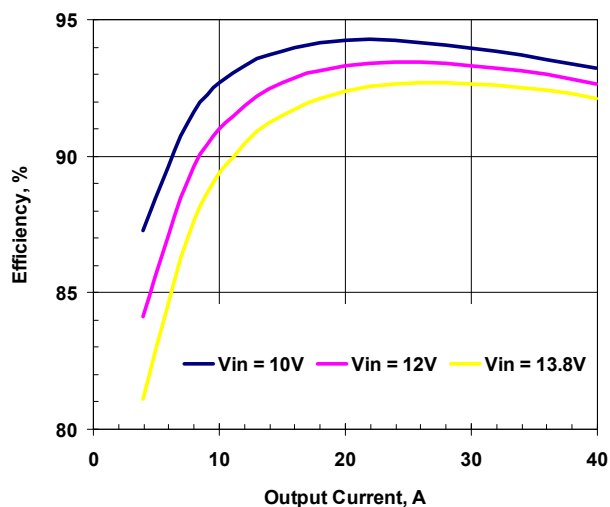


Figure 4. Efficiency vs. Load. Vout=3.3V

5.2 Turn-On Characteristics

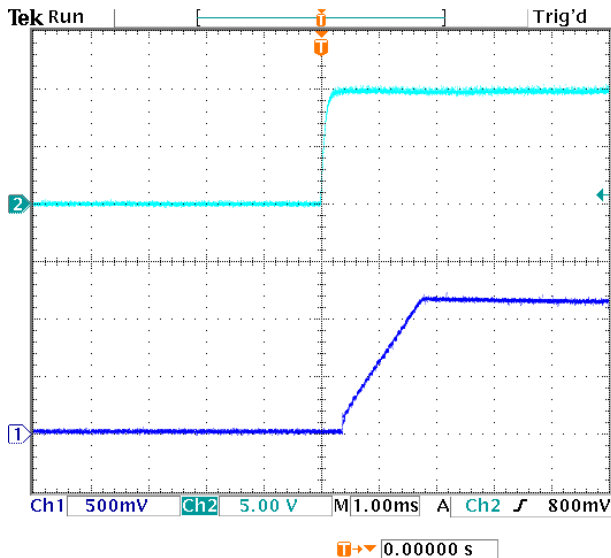


Figure 5. Typical Start-Up Using Remote On/Off
($V_o = 1.2\text{ Vdc}$, $I_o = 40\text{ A}$). Ch1 – Vout, Ch2 – ON/OFF

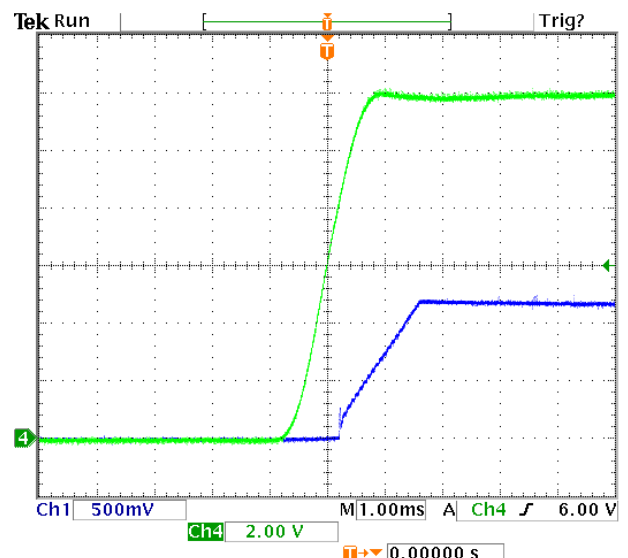


Figure 7. Typical Start-Up with application of V_{in}
($V_o = 1.2\text{ Vdc}$, $I_o = 40\text{ A}$). Ch1 – Vout, Ch2 – Vin

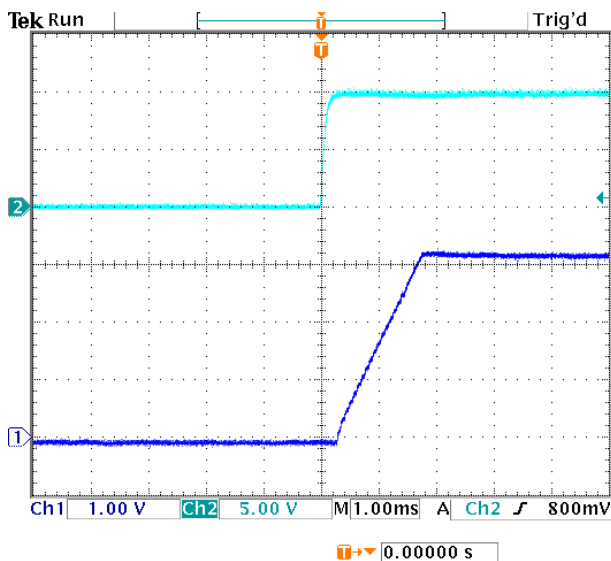


Figure 6. Typical Start-Up Using Remote On/Off
($V_o = 3.3\text{ Vdc}$, $I_o = 40\text{ A}$). Ch1 – Vout, Ch2 – ON/OFF

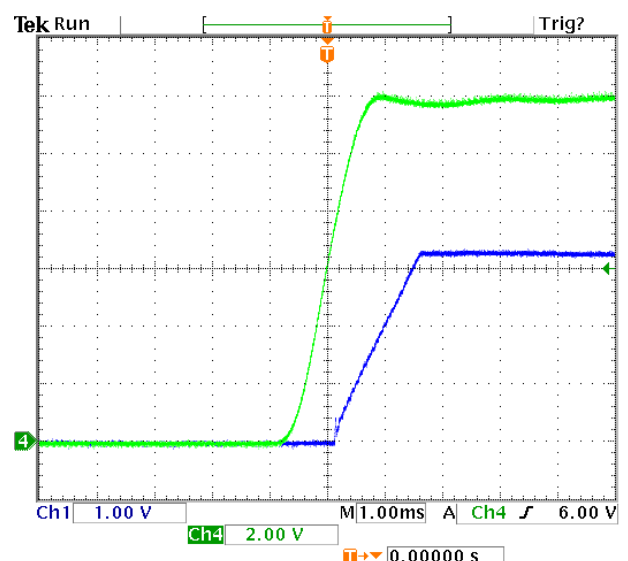


Figure 8. Typical Start-Up with application of V_{in}
($V_o = 3.3\text{ Vdc}$, $I_o = 40\text{ A}$). Ch1 – Vout, Ch2 – Vin

5.3 Transient Response

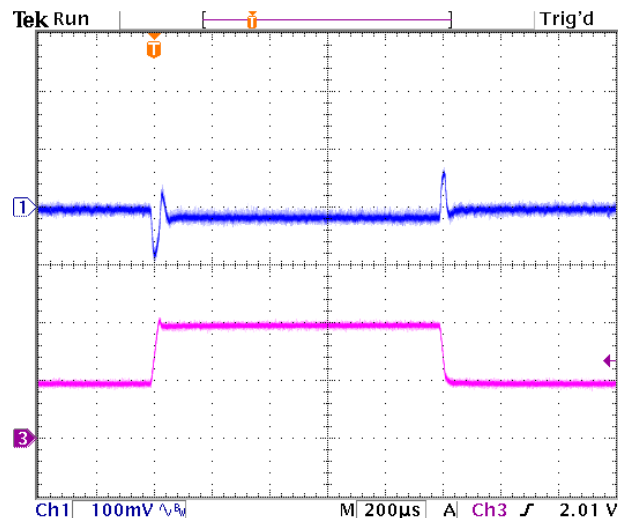


Figure 9. Transient Response to Dynamic Load Change from 50% to 100% of full load ($V_{in}=12V$, $V_o=0.6Vdc$). Ch3 – Iout. Scale=20A/div

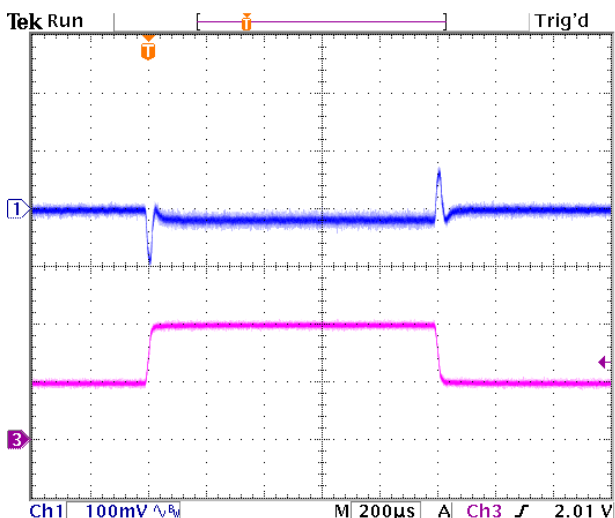


Figure 10. Transient Response to Dynamic Load Change from 50% to 100% of full load ($V_{in}=12V$, $V_o=2.5Vdc$). Ch3 – Iout. Scale=20A/div

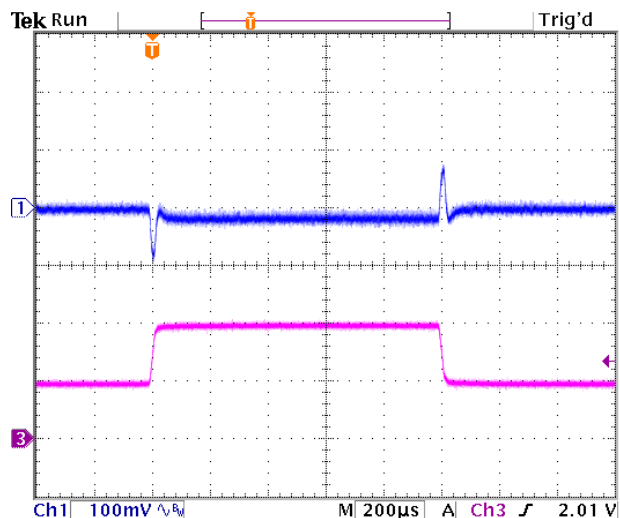


Figure 11. Transient Response to Dynamic Load Change from 50% to 100% of full load ($V_{in}=12V$, $V_o=3.3Vdc$). Ch3 – Iout. Scale=20A/div

5.4 Derating Curves

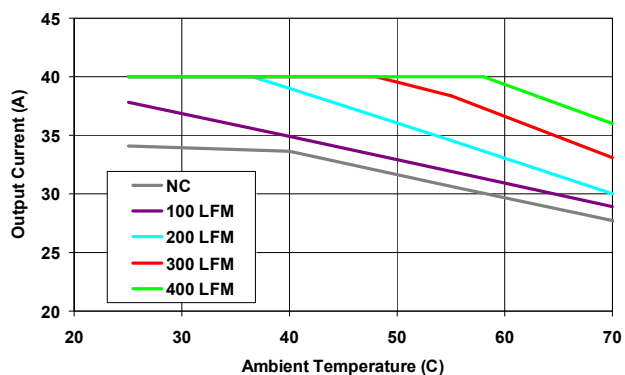


Figure 12. Output Current Derating at $V_o=0.6Vdc$

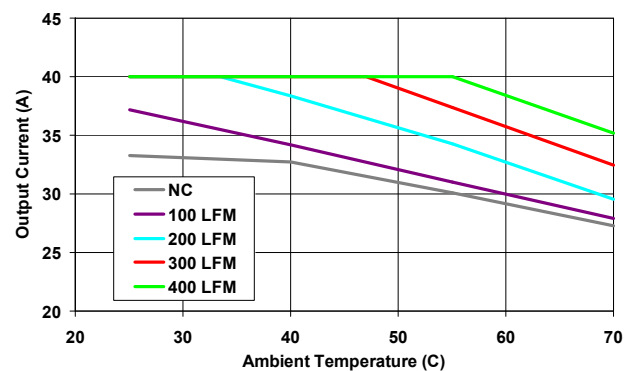


Figure 13. Output Current Derating at $V_o=1.2Vdc$

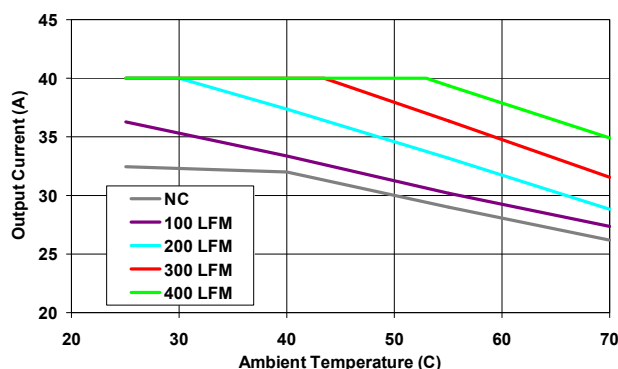


Figure 14. Output Current Derating at Vo=1.8Vdc

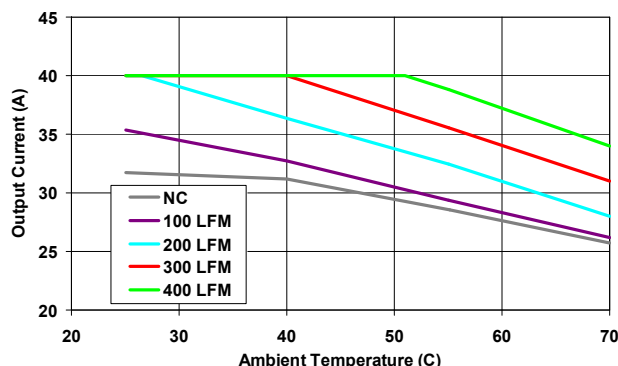


Figure 15. Output Current Derating at Vo=2.5Vdc

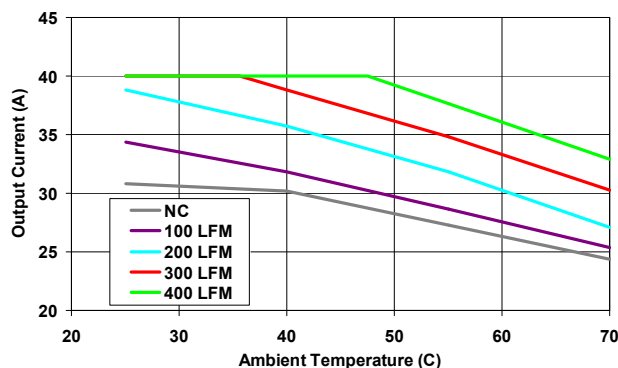


Figure 16. Output Current Derating at Vo=3.3Vdc

6. Application Information

6.1 Input and Output Impedance

The POL converter should be connected to the DC power source via low impedance. In many applications, the inductance associated with the distribution from the power source to the input of the converter can affect the stability of the converter. Internally, the converter includes 60μF (low ESR ceramics) of input capacitance which eliminates the need for external input capacitance. However, if the distribution of the input voltage to the POL converter contains high inductance, it is recommended to add a 150μF decoupling capacitor placed as close as possible to the converter input pins. A low-ESR tantalum or POS capacitor connected across the input pins help ensuring stability of the POL converter and reduce input ripple voltage.

A 470μF POS, tantalum, or ceramic output capacitor is recommended to improve output ripple and dynamic response.

It is important to keep low resistance and low inductance of PCB traces for connecting load to the output pins of the converter in order to maintain good load regulation.

6.2 Output Voltage Programming

The output voltage can be programmed from 0.6V to 3.63V by connecting an external resistor R_{TRIM} between Trim+ pin (Pin 8) and Trim- pin (Pin 7), as shown in Figure 17.

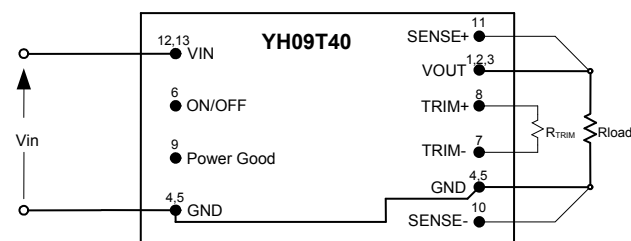


Figure 17. Programming Output Voltage With A Resistor

The trim resistor R_{TRIM} for a desired output voltage can be calculated using the following equation:

$$R_{TRIM} = \frac{1.2}{V_{OUT} - 0.6}, \text{ k}\Omega$$

where:

R_{TRIM} = Required value of trim resistor in k Ω

V_{OUT} = Desired (trimmed) value of output voltage V

If the R_{TRIM} is not used and the Sense+ and Sense- pins are shorted to VOUT and GND respectively, the output voltage of the POL converter will be 0.6V. No capacitor is allowed between Trim+ and Trim- pins.

Note that the trim resistor tolerance directly affects the output voltage accuracy. It is recommended to use $\pm 0.1\%$ trim resistors to meet the output voltage setpoint accuracy specified in p. 4.1.

Table 1. Trim Resistor Values

| V_{OUT} , V | Calculated R_{TRIM} , k Ω | Standard Value of 0.1% Resistor, k Ω |
|---------------|------------------------------------|---|
| 0.6 | Open | Open |
| 1.0 | 3.0 | 3.01 |
| 1.2 | 2.0 | 2.0 |
| 1.5 | 1.333 | 1.33 |
| 1.8 | 1.0 | 1.0 |
| 2.0 | 0.857 | 0.856 |
| 2.5 | 0.631 | 0.634 |
| 3.3 | 0.444 | 0.442 |
| 3.63 | 0.396 | 0.397 |

6.3 ON/OFF (Pin 6)

The ON/OFF pin is used to turn the POL converter ON or OFF remotely by a signal from a system controller. For positive logic, the POL converter is ON when the ON/OFF pin is at a logic high (2.4V min) or left open. The POL converter is OFF when the ON/OFF pin is at a logic low (1.2V max) or connected to GND.

The typical connections are shown in Figure 18.

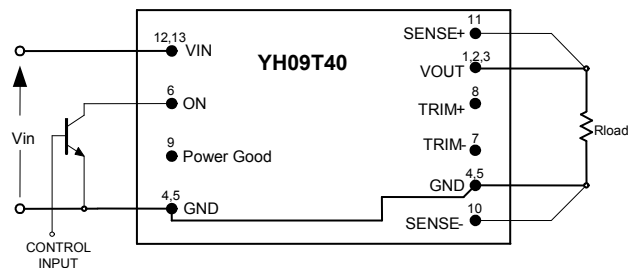


Figure 18. Circuit Configuration For ON/OFF Function

The ON/OFF pin is referenced to ground and typically has 50k Ω input impedance. It has an

internal 50k Ω pull-up to 5V supply. It is recommended to control the ON/OFF pin with an open collector transistor or similar device.

6.4 Remote Sense (Pins 10 and 11)

The remote sense feature compensates for the voltage drop between the output pins of the POL converter and the load. The Sense- (Pin 10) and Sense+ (Pin 11) pins should be connected at the load or at the point where regulation is required (refer to Figure 19).

If remote sensing is not required, the Sense pins must be connected to the VOUT and GND pins directly at the output of the POL converter.

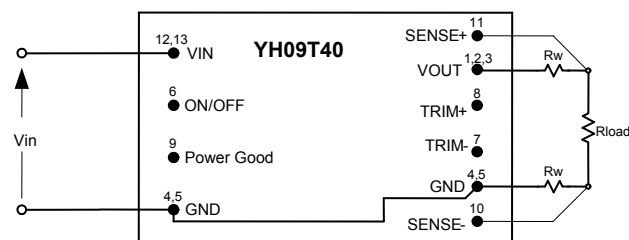


Figure 19. Remote Sense Circuit Configuration

Because the sense leads carry minimal current, large traces on the end-user board are not required. The voltage sense traces should be located close to a ground plane to minimize system noise.

When using remote sense, the output voltage at the converter can be increased by up to 0.5V in order to maintain the required voltage at the load. However, the maximum output voltage measured directly between the VOUT and GND pins shall not exceed 3.63V. In addition it is the user's responsibility to ensure the POL converter's actual output power always remains at or below the maximum allowable output power obtained from the derating curves.

6.5 Protections

6.5.1 Power Good

Power Good pin (Pin 9) is an open drain output, capable of sinking up to 4mA. The Power Good pin is high when the output voltage is within the regulation band. The Power Good pin is at logic low during start-up, undervoltage, overvoltage or overcurrent conditions, or when the POL converter is disabled via the ON/OFF signal.

6.5.2 Input Undervoltage Lockout

The POL converter will shut down when the input voltage drops below a predetermined voltage. It will start automatically when the input voltage exceeds the specified threshold.

6.5.3 Output Overcurrent Protection

The POL converter is protected against overcurrent and short circuit conditions. Upon sensing an overcurrent condition, the POL converter will enter hiccup mode of operation. Once the overload or short circuit condition is removed, the POL converter will automatically restart and V_{out} will return to its nominal value.

6.5.4 Output Overvoltage Protection

The POL converter is protected against overvoltage on the output. If the output voltage is higher than 125% of its nominal value set by the R_{TRIM} , the high side MOSFETs will be immediately turned off and the low side MOSFETs will be turned on. The POL converter will remain in the state until the output voltage reduces below 115% of its nominal value. At that point the POL converter will automatically restart.

6.5.5 Overtemperature Protection

The POL converter will shut down under an overtemperature condition to protect itself from overheating caused by operation outside the thermal derating curves, or operation in abnormal conditions such as system fan failure. After the POL converter has cooled to a safe operating temperature, it will automatically restart.

7. Characterization

7.1 Ripple and Noise

The output voltage ripple and input reflected ripple current waveforms are measured using the test setup shown in Figure 20.

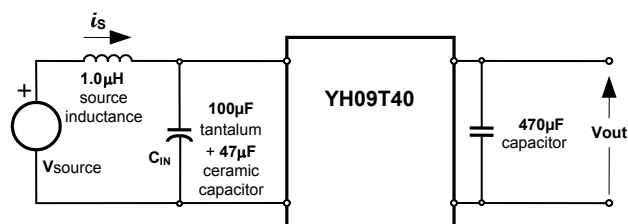


Figure 20. Test Setup For Measuring Input Reflected-Ripple Current And Output Voltage Ripple

8. Safety

The YH09T40-0 POL converters **do not provide isolation** from input to output. The input devices powering YH09T40-0 must provide relevant isolation requirements according to all IEC60950 based standards. Nevertheless, if the system using the converter needs to receive safety agency approval, certain rules must be followed in the design of the system. In particular, all of the creepage and clearance requirements of the end-use safety requirements must be observed. These requirements are included in UL60950 - CSA60950-00 and EN60950, although specific applications may have other or additional requirements.

The YH09T40-0 POL converters have no internal fuse. If required, the external fuse needs to be provided to protect the converter from catastrophic failure. Refer to the "Input Fuse Selection for DC/DC converters" application note on www.power-one.com for proper selection of the input fuse. Both input traces and the chassis ground trace (if applicable) must be capable of conducting a current of 1.5 times the value of the fuse without opening.

To comply with safety agencies' requirements, a recognized fuse must be used in series with the input line. The fuse must not be placed in the grounded input line. Abnormal and component failure tests were conducted with the POL input protected by three fast-acting 15A, 125V fuses connected in parallel. If fuses rated greater than 15A is used, additional testing may be required.

The maximum DC voltage between any two pins is V_{in} under all operating conditions. In order for the output of the YH09T40-0 POL converter to be considered as SELV (Safety Extra Low Voltage), according to all IEC60950 based standards, the input to the POL needs to be supplied by an isolated secondary source providing a SELV also.

9. Pin Assignments and Description

| Pin Name | Pin Number | Pin Type | Buffer Type | Pin Description | Notes |
|----------|------------|----------|-------------|------------------------|---|
| VOUT | 1, 2, 3 | P | | Output Voltage | |
| GND | 4, 5 | P | | Power Ground | |
| ON/OFF | 6 | I | PU | Enable | Pull high or leave floating to turn ON the POL |
| Trim- | 7 | I/O | A | Output Voltage Trim | Connect a high accuracy resistor between Trim+ and Trim- pins to set the output voltage |
| Trim+ | 8 | I | A | Output Voltage Trim | Connect a high accuracy resistor between Trim+ and Trim- pins to set the output voltage |
| PwrGood | 9 | I/O | PU | Power Good | Open drain pin indicating status of the output voltage |
| Sense- | 10 | I | A | Negative Voltage Sense | Connect to the negative point close to the load |
| Sense+ | 11 | I | A | Positive Voltage Sense | Connect to the positive point close to the load |
| VIN | 12, 13 | P | | Input Voltage | |
| | 14, 15 | | | Mechanical Support | Connected to GND inside of the POL converter |

Legend: I=input, O=output, I/O=input/output, P=power, A=analog, PU=internal pull-up

10. Mechanical Drawings

Tolerances: **X.XX: $\pm 0.02"$ (X.XX mm: ± 0.5 mm)** **X.XXX: $\pm 0.01"$ (X.XXX mm: ± 0.25 mm)**

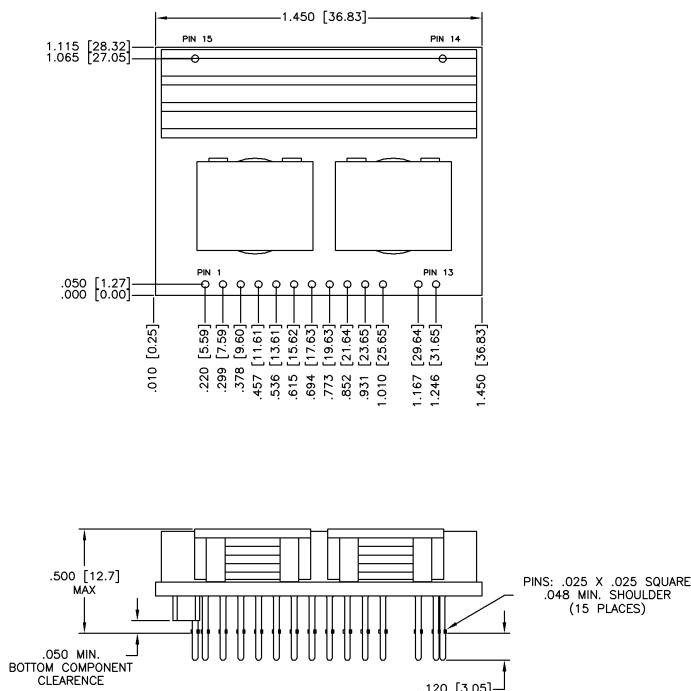


Figure 21. Mechanical Drawing

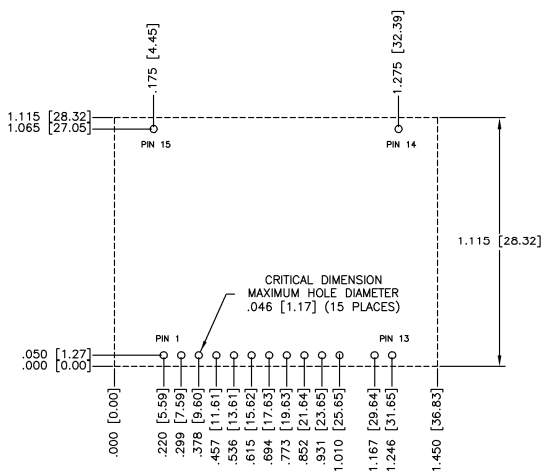


Figure 22. Recommended Footprint – Top View

Notes:

1. NUCLEAR AND MEDICAL APPLICATIONS - Power-One products are not designed, intended for use in, or authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional president of Power-One, Inc.
2. TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.