

# Photoelectrics, Fibre Optic Sensor

## Plastic Fibres

### Type PD 60 CNX 20 BP .. T

CARLO GAVAZZI



- Range: Fibre dependent
  - Diffuse Reflective typ. 80 mm
  - Through Beam typ. 200 mm
- Teach-In (keyboard or remote setup)
- Microprocessor controlled and EEPROM parameter storage
- Operational voltage 10 - 30 V DC
- Output 100 mA, NPN and PNP
- Light or dark switching selectable
- IP65 protection
- Timer: ON-delay or OFF-delay



## Product Description

The PD60CNX20BP.. T is a fibre optic amplifier made specific for plastic fibres. The sensor is microprocessor based and has a buildin programmable functions such as Teach-In function for fast sensing distance optimising, NO or NC output, Time delay Onor OFF. The sensor output is build as a Push-pull output that performs both a NPN and PNP output which are fully protected against short-cir-

cuit, transients and wrong polarity. The sensor is build in a strong 13 x 30 x 60 mm polycarbonate housing for DIN-rail mounting.

The sensors are suitable for applications that require little space and high accuracy such as: Small part detection, tight locations, checking parts, counting, precise part positioning, material handling and assembly and robotics

## Ordering Key

**PD 60 CNX 20 BP M5 T**

Type	_____
Housing style	_____
Housing size	_____
Housing material	_____
Not Used	_____
Plastic fibres	_____
Sensing distance cm	_____
Output type	_____
Output configuration	_____
Connection type	_____
Teach-In mode	_____

## Type Selection

Housing W x H x D	Range S <sub>n</sub> (Fibre dependent)	Ordering no. NPN and PNP cable Make or break switching	Ordering no. NPN and PNP plug Make or break switching
13 x 30 x 60 mm	80 mm diffuse mode 200 mm through beam mode	<b>PD 60 CNX 20 BP T</b>	<b>PD 60 CNX 20 BP M5 T</b>

## Specifications


<b>Rated operating distance (S<sub>n</sub>)</b> Diffuse mode Through beam mode	See optical fibre table Up to 80 mm Up to 200 mm	<b>No load supply current (I<sub>o</sub>)</b>	≤ 40 mA
<b>Sensitivity</b> Teach-In Manual fine tune	Automatic threshold set-up Sensitivity increase or sensitivity decrease	<b>Voltage drop (U<sub>d</sub>)</b> I <sub>L</sub> = 100 mA I <sub>L</sub> = 10 mA	≤ 2 VDC ≤ 1 VDC
<b>Temperature drift</b>	< 0,4%/C°	<b>Remote input</b> ON OFF	≤ 1.4 VDC ≥ 3.0 VDC
<b>Hysteresis (H)</b> Differential travel	≤ 5%	<b>Timer</b> Range programmable First step Following step	0 to 5 s in 11 steps 40 ms 500 ms
<b>Rated operational volt. (U<sub>B</sub>)</b>	10 to 30 VDC (ripple included)	<b>Protection</b>	Short-circuit, reverse polarity, transients
<b>Ripple (U<sub>rip</sub>)</b>	≤ 10%	<b>Light source</b> <b>Light type</b> <b>Ambient light</b> Incandescent light Sunlight	GaAlAs, LED 660 nm Red modulated  10'000 Lux 20'000 Lux
<b>Output current</b> Continuous (I <sub>a</sub> ) Short-time (I)	100 mA 100 mA		




Specifications (cont.)

Operating frequency	1 KHz	Temperature	
Response time		Operating	0° to +60°C (32° to +140°F)
OFF-ON (t <sub>ON</sub> )	≤ 500 μs	Storage	-20° to +80°C (-4° to +176°F)
ON-OFF (t <sub>OFF</sub> )	≤ 500 μs	Vibration	10 to 150 Hz, 0.5 mm/7.5 g (IEC60068-2-6)
Power ON delay (t <sub>v</sub> )	≤ 300 ms	Shock	2 x 1 m & 100 x 0.5 m (IEC 60068-2-6, 60068-2-32)
Output function	Available (Push-pull output) Programming by keyboard	Rated insulation voltage	50 VAC (rms)
NPN and PNP		Housing material	
Make or break		Body	Polycarbonate
Indication function	Target detected, timer ON, sensitivity, alignment, low signal, keyboard lock, short circuit	Connection	
		Cable	PVC, grey, 2 m, 4 x 0,25 mm <sup>2</sup>
Environment		Plug	NPB, M8 x 1
Installation category	I (IEC 60664/60664A;60947-1)	Cables for plug (M5)	CONG5A-series
Pollution degree	3 (IEC 60664/60664A;60947-1)	Weight	24 g
Degree of protection	IP 65 (IEC 60529; 60947-1)	Approvals	cUL
		CE-marking	Yes

Operation Diagram

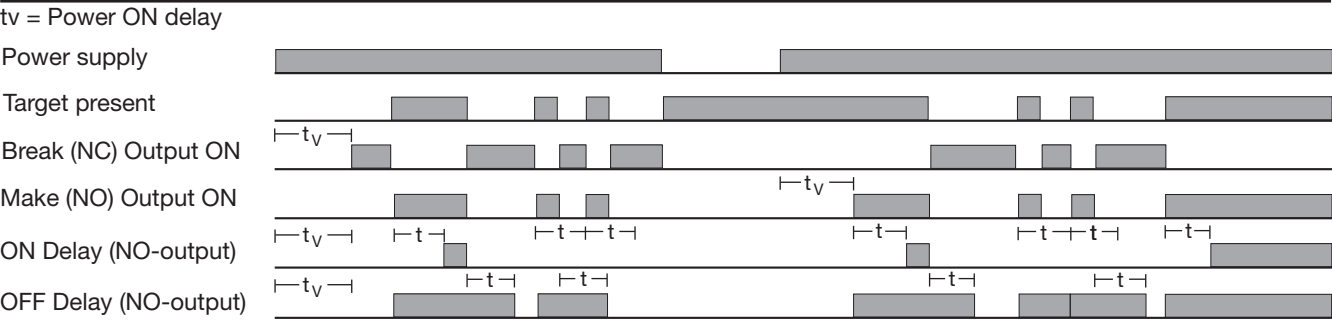

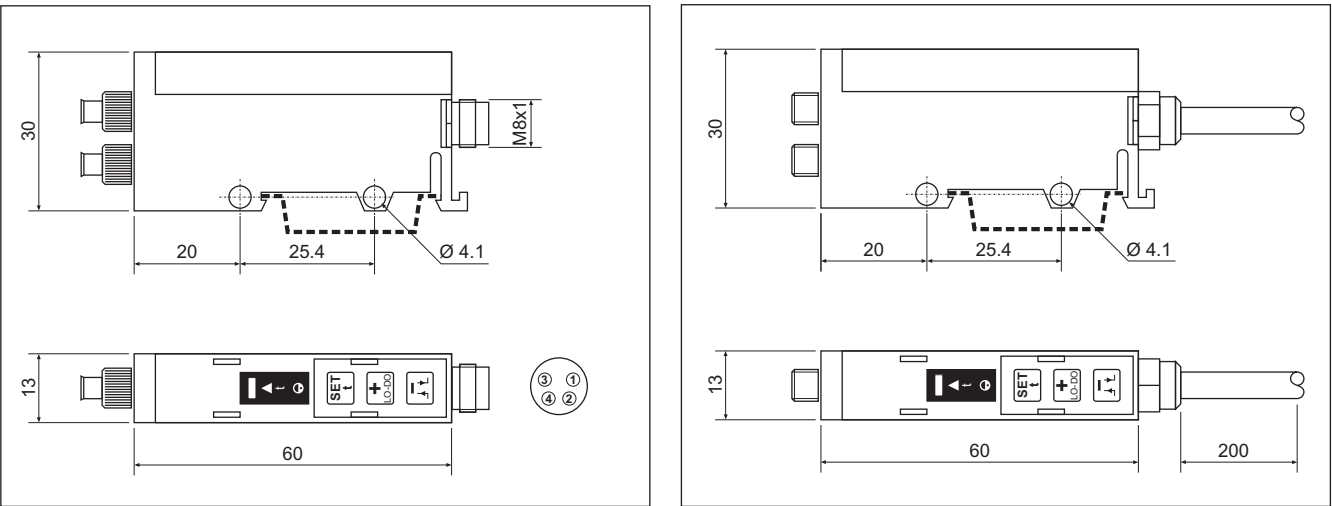


Dimensions






## Programming Functions

### Keyboard

Unlock

Press  &   
for 4 sec. and the indicator turns OFF 

Lock

Press  &   
for 4 sec. and the indicator turns ON 

### Self-Teach operation

Coarse set-up mode

Press  one time

Fine set-up mode  
(Similar to Remote Input)

Press  two times

### Sensitivity adjustment

To increase

Press  N time

To decrease

Press  N times

### Light or dark operation

Change the output function

Press  for 4 sec.

### Timing functions

ON delay

Press  for 4 sec.

Set timer (timer ON)

Until the  flashes

Increase time (500 mS/step)

Press  N times

Decrease time (500 mS/step)

Press  N times

ON or OFF delay (toggle)

Press  for 4 sec.

Reset timer (timer OFF)

Press  once

Exit timer setting



Press  for 4 sec.

### Alignment help


Enter alignment help

Press  for 4 sec.

Exit alignment help


Until the  flashes  
Three frequencies proportional to the signal strength  
Press  for 4 sec.

## Wiring Diagram

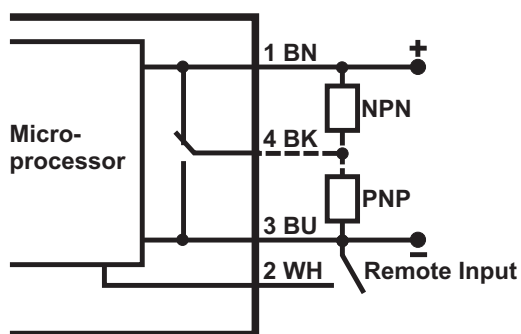





When remote input is not used, connect the (2WH) wire to the +input (1BN)

## Keyboard and LED

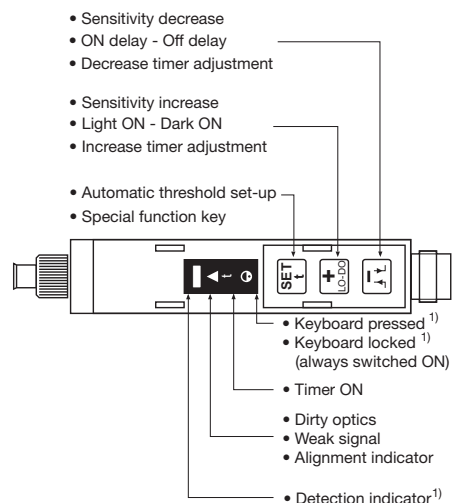

<sup>1)</sup> The LED's flash if a short-circuit occurs on the static output and emitter is turned off.

## Installation Hints
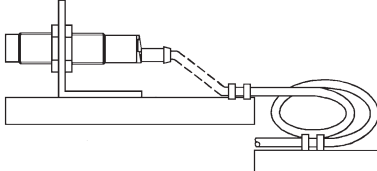
<p>To avoid interference from inductive voltage/current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables</p> 	<p>Relief of cable strain</p>  <p>The cable should not be pulled</p>	<p>Protection of the sensing face</p>  <p>A proximity switch should not serve as mechanical stop</p>	<p>Switch mounted on mobile carrier</p>  <p>Any repetitive flexing of the cable should be avoided</p>
---	---	---	--

## Delivery Contents

- Photoelectric switch: PD60CNX20BP..T
- Installation instruction
- **Packaging:** Cardboard box

## Accessories

- Plastic fibres type FPD..., FPT..
- Connector type: CONG5A../CON.54NF

For further information refer to "Accessories"