

Single/Dual Programmable Supply Current, R-R Output, Current Feedback Amplifiers

FEATURES

- **Programmable Supply Current and Bandwidth:**
10MHz at 300 μ A per Amplifier up to 200MHz at 6mA per Amplifier
- **Rail-to-Rail Output:**
0.05V to 2.85V on 3V Single Supply
- **High Slew Rate:** 700V/ μ s
- **High Output Drive:**
 \pm 75mA Minimum Output Current
- **C-Load™ Op Amp Drives All Capacitive Loads**
- **Low Distortion:**
–70dB HD2 at 1MHz 2V_{P-P}
–75dB HD3 at 1MHz 2V_{P-P}
- **Fast Settling:**
20ns 0.1% Settling for 2V Step
- **Excellent Video Performance Into 150 Ω Load:**
Differential Gain of 0.20%, Differential Phase of 0.10°
- **Wide Supply Range:**
3V to 12V Single Supply
 \pm 1.5V to \pm 6V Dual Supplies
- **Small Size:**
Low Profile (1mm) 6-Lead ThinSOT™,
3mm \times 3mm \times 0.8mm DFN and 10-Lead MSOP Packages

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks and C-Load and ThinSOT are trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

DESCRIPTION

The LT®6210/LT6211 are single/dual current feedback amplifiers with externally programmable supply current and bandwidth ranging from 10MHz at 300 μ A per amplifier to 200MHz at 6mA per amplifier. They feature a low distortion rail-to-rail output stage, 700V/ μ s slew rate and a minimum output current drive of 75mA.

The LT6210/LT6211 operate on supplies as low as a single 3V and up to either 12V or \pm 6V. The I_{SET} pin allows for the optimization of quiescent current for specific bandwidth, distortion or slew rate requirements. Regardless of supply voltage, the supply current is programmable from just 300 μ A to 6mA per amplifier with an external resistor or current source.


The LT6210 is available in the low profile (1mm) 6-lead TSOT-23 package. The LT6211 is available in the 10-lead MSOP and the 3mm \times 3mm \times 0.8mm DFN packages.

APPLICATIONS

- Buffers
- Video Amplifiers
- Cable Drivers
- Mobile Communication
- Low Power/Battery Applications


TYPICAL APPLICATION

Line Driver Configuration for Various Supply Currents

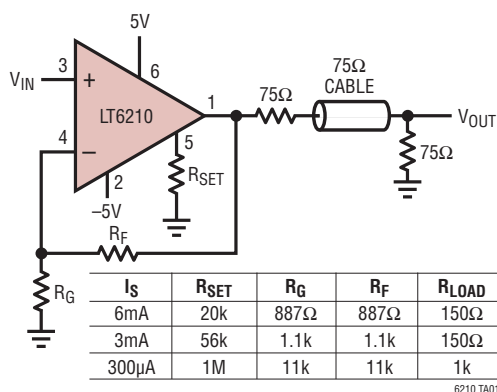

6210 TA01

Small Signal Response vs Supply Current

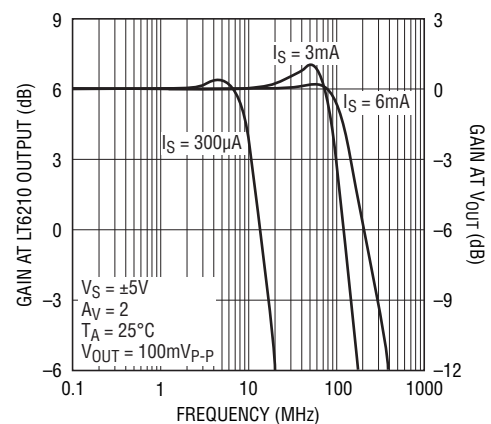

6210 TA01b

62101fc


LT6210/LT6211

ABSOLUTE MAXIMUM RATINGS

(Note 1)

| | | | |
|---|---|---|--|
| Total Supply Voltage (V^+ to V^-) | 13.2V | Junction Temperature (Note 5) | 150°C |
| Input Current (Note 8) | $\pm 10\text{mA}$ | Junction Temperature (DD Package) | 150°C |
| Output Current | $\pm 80\text{mA}$ | Storage Temperature Range | -65°C to 150°C |
| Output Short-Circuit Duration (Note 2) | Indefinite | Storage Temperature Range (DD Package) | -65°C to 150°C |
| Operating Temperature Range (Note 3) | -40°C to 85°C | Lead Temperature (Soldering, 10 sec) | 300°C |
| Specified Temperature Range (Note 4) | -40°C to 85°C | | |

PIN CONFIGURATION

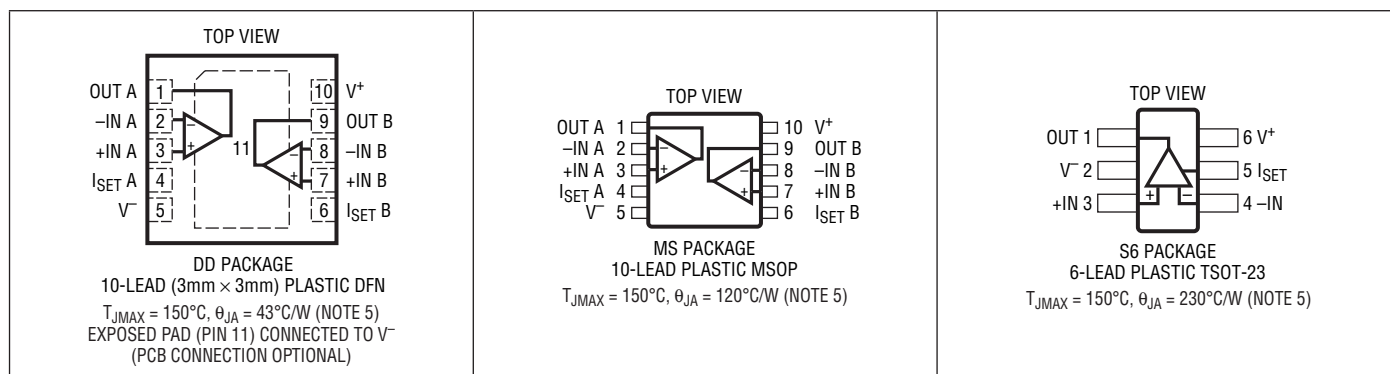

ORDER INFORMATION

| LEAD FREE FINISH | TAPE AND REEL | PART MARKING* | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE |
|-------------------|-----------------|---------------|--|---|
| LT6211CDD#PBF | LT6211CDD#TRPBF | LBCD | 10-Lead (3mm \times 3mm) Plastic DFN | 0°C to 70°C |
| LT6211IDD#PBF | LT6211IDD#TRPBF | LBCD | 10-Lead (3mm \times 3mm) Plastic DFN | -40°C to 85°C |
| LT6211CMS#PBF | LT6211CMS#TRPBF | LTBBN | 10-Lead Plastic MSOP | 0°C to 70°C |
| LT6211IMS#PBF | LT6211IMS#TRPBF | LTBBP | 10-Lead Plastic MSOP | -40°C to 85°C |
| LT6210CS6#PBF | LT6210CS6#TRPBF | LTA3 | 6-Lead Plastic TSOT-23 | 0°C to 70°C |
| LT6210IS6#PBF | LT6210IS6#TRPBF | LTA3 | 6-Lead Plastic TSOT-23 | -40°C to 85°C |
| LEAD BASED FINISH | TAPE AND REEL | PART MARKING* | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE |
| LT6211CDD | LT6211CDD#TR | LBCD | 10-Lead (3mm \times 3mm) Plastic DFN | 0°C to 70°C |
| LT6211IDD | LT6211IDD#TR | LBCD | 10-Lead (3mm \times 3mm) Plastic DFN | -40°C to 85°C |
| LT6211CMS | LT6211CMS#TR | LTBBN | 10-Lead Plastic MSOP | 0°C to 70°C |
| LT6211IMS | LT6211IMS#TR | LTBBP | 10-Lead Plastic MSOP | -40°C to 85°C |
| LT6210CS6 | LT6210CS6#TR | LTA3 | 6-Lead Plastic TSOT-23 | 0°C to 70°C |
| LT6210IS6 | LT6210IS6#TR | LTA3 | 6-Lead Plastic TSOT-23 | -40°C to 85°C |

Consult LTC Marketing for parts specified with wider operating temperature ranges. *The temperature grade is identified by a label on the shipping container.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandreel/>

ELECTRICAL CHARACTERISTICS ($I_S = 6\text{mA}$ per Amplifier) The ● denotes the specifications which apply over the specified operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$. For $V^+ = 5\text{V}$, $V^- = -5\text{V}$: $R_{SET} = 20\text{k}$ to ground, $A_V = +2$, $R_F = R_G = 887\Omega$, $R_L = 150\Omega$; For $V^+ = 3\text{V}$, $V^- = 0\text{V}$: $R_{SET} = 0\Omega$ to V^- , $A_V = +2$, $R_F = 887\Omega$, $R_G = 887\Omega$ to 1.5V , $R_L = 150\Omega$ to 1.5V unless otherwise specified.

| SYMBOL | PARAMETER | CONDITIONS | | $V^+ = 5\text{V}$, $V^- = -5\text{V}$, $I_S = 6\text{mA}$ | | | $V^+ = 3\text{V}$, $V^- = 0\text{V}$, $I_S = 6\text{mA}$ | | | UNITS |
|-------------|---|---|---|---|-------------------|----------------------|--|---------------------|-----------------------|--|
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| V_{OS} | Input Offset Voltage | | ● | | -1 | ± 6 ± 9 | | -1 | ± 6.5 ± 10 | mV mV |
| I_{IN}^+ | Noninverting Input Current | | ● | | -3.5 | ± 7 ± 9 | | -3 | ± 6.5 ± 8 | μA μA |
| I_{IN}^- | Inverting Input Current | | ● | | -13.5 | ± 39 ± 55 | | 2.5 | ± 25 ± 40 | μA μA |
| e_n | Input Noise Voltage Density | $f = 1\text{kHz}$, $R_F = 887\Omega$, $R_G = 46.4\Omega$, $R_S = 0\Omega$ | | | 6.5 | | | 6.5 | | $\text{nV}/\sqrt{\text{Hz}}$ |
| $+i_n$ | Input Noise Current Density | $f = 1\text{kHz}$ | | | 4.5 | | | 4.5 | | $\text{pA}/\sqrt{\text{Hz}}$ |
| $-i_n$ | Input Noise Current Density | $f = 1\text{kHz}$ | | | 25 | | | 25 | | $\text{pA}/\sqrt{\text{Hz}}$ |
| R_{IN}^+ | Noninverting Input Resistance | $V_{IN} = V^+ - 1.2\text{V}$ to $V^- + 1.2\text{V}$ | ● | 0.5 | 2 | | 0.3 | 1.7 | | $\text{M}\Omega$ |
| C_{IN}^+ | Noninverting Input Capacitance | $f = 100\text{kHz}$ | | | 2 | | | 2 | | pF |
| V_{INH} | Input Voltage Range, High | (Note 10) | ● | 3.8 | 4.2 | | 1.8 | 2.2 | | V |
| V_{INL} | Input Voltage Range, Low | (Note 10) | ● | | -4.2 | -3.8 | | 0.8 | 1.2 | V |
| V_{OUTH} | Output Voltage Swing, High | $R_L = 1\text{k}$ (Note 11) $R_L = 150\Omega$ (Note 11) $R_L = 150\Omega$ (Note 11) | ● | | 4.8 4.4 4.2 | | | 2.85 2.75 2.6 | | V V V |
| V_{OUTL} | Output Voltage Swing, Low | $R_L = 1\text{k}$ (Note 11) $R_L = 150\Omega$ (Note 11) $R_L = 150\Omega$ (Note 11) | ● | | -4.95 -4.8 | -4.55 -4.4 | | 0.05 0.1 | 0.3 0.35 | V V V |
| CMRR | Common Mode Rejection Ratio | $V_{IN} = V^+ - 1.2\text{V}$ to $V^- + 1.2\text{V}$ | ● | 46 43 | 50 | | | 46 | | dB dB |
| $-I_{CMRR}$ | Inverting Input Current Common Mode Rejection | $V_{IN} = V^+ - 1.2\text{V}$ to $V^- + 1.2\text{V}$ | ● | | 0.15 | ± 1.5 ± 2 | | 0.2 | | $\mu\text{A}/\text{V}$ $\mu\text{A}/\text{V}$ |
| PSRR | Power Supply Rejection Ratio | $V_S = \pm 1.5\text{V}$ to $\pm 6\text{V}$ (Note 6) | ● | 60 | 85 | | 60 | 85 | | dB |
| $-I_{PSRR}$ | Inverting Input Current Power Supply Rejection | $V_S = \pm 1.5\text{V}$ to $\pm 6\text{V}$ (Note 6) | ● | | 2 | ± 7 ± 8 | | 2 | ± 7 ± 8 | $\mu\text{A}/\text{V}$ $\mu\text{A}/\text{V}$ |
| I_S | Supply Current per Amplifier | | ● | | 6 | 8.5 10 | | 5.8 | 8.3 9 | mA mA |

ELECTRICAL CHARACTERISTICS (I_S = 6mA per Amplifier)

The ● denotes the specifications which apply over the specified operating temperature range, otherwise specifications are at T_A = 25°C. For V⁺ = 5V, V⁻ = -5V: R_{SET} = 20k to ground, A_V = +2, R_F = R_G = 887Ω, R_L = 150Ω; For V⁺ = 3V, V⁻ = 0V: R_{SET} = 0Ω to V⁻, A_V = +2, R_F = 887Ω, R_G = 887Ω to 1.5V, R_L = 150Ω to 1.5V unless otherwise specified.

| SYMBOL | PARAMETER | CONDITIONS | V ⁺ = 5V, V ⁻ = -5V, I _S = 6mA | | | V ⁺ = 3V, V ⁻ = 0V, I _S = 6mA | | | UNITS |
|---------------------------------|--|--|---|-----|------|--|------|-----|-------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| I _{OUT} | Maximum Output Current | R _L = 0Ω (Notes 7, 11) | ● | ±75 | | ±45 | | | mA |
| R _{OL} | Transimpedance, ΔV _{OUT} /ΔI _{IN} ⁻ | V _{OUT} = V ⁺ - 1.2V to V ⁻ + 1.2V | | 65 | 115 | 65 | 115 | | kΩ |
| SR | Slew Rate | (Note 8) | | 500 | 700 | | 200 | | V/μs |
| t _{pd} | Propagation Delay | 50% V _{IN} to 50% V _{OUT} , 100mV _{P-P} , Larger of t _{pd} ⁺ , t _{pd} ⁻ | | | 1.5 | | 2.4 | | ns |
| BW | -3dB Bandwidth | <1dB Peaking, A _V = 1 | | | 200 | | 120 | | MHz |
| t _s | Settling Time | To 0.1% of V _{FINAL} , V _{STEP} = 2V | | | 20 | | 25 | | ns |
| t _f , t _r | Small-Signal Rise and Fall Time | 10% to 90%, V _{OUT} = 100mV _{P-P} | | | 2 | | 3.5 | | ns |
| dG | Differential Gain | (Note 9) | | | 0.20 | | 0.35 | | % |
| dP | Differential Phase | (Note 9) | | | 0.10 | | 0.20 | | Deg |
| HD2 | 2nd Harmonic Distortion | f = 1MHz, V _{OUT} = 2V _{P-P} | | | -70 | | -65 | | dBc |
| HD3 | 3rd Harmonic Distortion | f = 1MHz, V _{OUT} = 2V _{P-P} | | | -75 | | -75 | | dBc |

(I_S = 3mA per Amplifier)

The ● denotes the specifications which apply over the specified operating temperature range, otherwise specifications are at T_A = 25°C. For V⁺ = 5V, V⁻ = -5V: R_{SET} = 56k to ground, A_V = +2, R_F = R_G = 1.1k, R_L = 150Ω; For V⁺ = 3V, V⁻ = 0V: R_{SET} = 10k to V⁻, A_V = +2, R_F = 1.27k, R_G = 1.27k to 1.5V, R_L = 150Ω to 1.5V unless otherwise specified.

| SYMBOL | PARAMETER | CONDITIONS | V ⁺ = 5V, V ⁻ = -5V, I _S = 3mA | | | V ⁺ = 3V, V ⁻ = 0V, I _S = 3mA | | | UNITS |
|------------------------------|--|---|---|---------------|---------------|--|--------------|-----|--------------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| V _{OS} | Input Offset Voltage | | ● | -1 | ±5.5 ±8.5 | -1.5 | ±5.5 ±8.5 | | mV mV |
| I _{IN} ⁺ | Noninverting Input Current | | ● | -1.5 | ±5 ±7 | -1.5 | ±5 ±7 | | μA μA |
| I _{IN} ⁻ | Inverting Input Current | | ● | -12 | ±36 ±52 | -3 | ±15 ±20 | | μA μA |
| e _n | Input Noise Voltage Density | f = 1kHz, R _F = 1.1k, R _G = 57.6Ω, R _S = 0Ω | | | 7 | | 7 | | nV/√Hz |
| +i _n | Input Noise Current Density | f = 1kHz | | | 1.5 | | 1.5 | | pA/√Hz |
| -i _n | Input Noise Current Density | f = 1kHz | | | 15 | | 15 | | pA/√Hz |
| R _{IN} ⁺ | Noninverting Input Resistance | V _{IN} = V ⁺ - 1.2V to V ⁻ + 1.2V | ● | 0.5 | 3 | 1 | 2.5 | | MΩ |
| C _{IN} ⁺ | Noninverting Input Capacitance | f = 100kHz | | | 2 | | 2 | | pF |
| V _{INH} | Input Voltage Range, High | (Note 10) | ● | 3.8 | 4.1 | 1.8 | 2.1 | | V |
| V _{INL} | Input Voltage Range, Low | (Note 10) | ● | -4.1 | -3.8 | 0.9 | 1.2 | | V |
| V _{OUTH} | Output Voltage Swing, High | R _L = 1k (Note 11) R _L = 150Ω (Note 11) R _L = 150Ω (Note 11) | ● | 4.3 4.1 | 4.8 4.6 | 2.6 2.55 | 2.9 2.8 | | V V V |
| V _{OUTL} | Output Voltage Swing, Low | R _L = 1k (Note 11) R _L = 150Ω (Note 11) R _L = 150Ω (Note 11) | ● | -4.95 -4.8 | -4.55 -4.4 | 0.05 0.1 | 0.3 0.35 | | V V V |
| CMRR | Common Mode Rejection Ratio | V _{IN} = V ⁺ - 1.2V to V ⁻ + 1.2V | ● | 46 43 | 50 | 46 | | | dB dB |
| -I _{CMRR} | Inverting Input Current Common Mode Rejection | V _{IN} = V ⁺ - 1.2V to V ⁻ + 1.2V | ● | | 0.3 | ±1.5 ±2 | 0.4 | | μA/V μA/V |

ELECTRICAL CHARACTERISTICS ($I_S = 3\text{mA}$ per Amplifier) The ● denotes the specifications which apply over the specified operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$. For $V^+ = 5\text{V}$, $V^- = -5\text{V}$: $R_{SET} = 56\text{k}$ to ground, $A_V = +2$, $R_F = R_G = 1.1\text{k}$, $R_L = 150\Omega$; For $V^+ = 3\text{V}$, $V^- = 0\text{V}$: $R_{SET} = 10\text{k}$ to V^- , $A_V = +2$, $R_F = 1.27\text{k}$, $R_G = 1.27\text{k}$ to 1.5V , $R_L = 150\Omega$ to 1.5V unless otherwise specified.

| SYMBOL | PARAMETER | CONDITIONS | | $V^+ = 5\text{V}$, $V^- = -5\text{V}$, $I_S = 3\text{mA}$ | | | $V^+ = 3\text{V}$, $V^- = 0\text{V}$, $I_S = 3\text{mA}$ | | | UNITS |
|---------------|--|---|---|---|------|--------------------|--|------|--------------------|------------------------------------|
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| PSRR | Power Supply Rejection Ratio | $V_S = \pm 1.5\text{V}$ to $\pm 6\text{V}$ (Note 6) | ● | 60 | 85 | | 60 | 85 | | dB |
| $-I_{PSRR}$ | Inverting Input Current Power Supply Rejection | $V_S = \pm 1.5\text{V}$ to $\pm 6\text{V}$ (Note 6) | ● | | 1.5 | ± 7 ± 8 | | 1.5 | ± 7 ± 8 | $\mu\text{A/V}$ $\mu\text{A/V}$ |
| I_S | Supply Current per Amplifier | | ● | | 3 | 4.1 4.55 | | 3 | 4.1 4.4 | mA mA |
| I_{OUT} | Maximum Output Current | $R_L = 0\Omega$ (Notes 7, 11) | ● | ± 70 | | | ± 45 | | | mA |
| R_{OL} | Transimpedance, $\Delta V_{OUT}/\Delta I_{IN^-}$ | $V_{OUT} = V^+ - 1.2\text{V}$ to $V^- + 1.2\text{V}$ | | 65 | 120 | | 65 | 120 | | $\text{k}\Omega$ |
| SR | Slew Rate | (Note 8) | | 450 | 600 | | 150 | | | $\text{V}/\mu\text{s}$ |
| t_{pd} | Propagation Delay | 50% V_{IN} to 50% V_{OUT} , 100mV _{P-P} , Larger of t_{pd^+} , t_{pd^-} | | | 3.1 | | | 4.7 | | ns |
| BW | -3dB Bandwidth | <1dB Peaking, $A_V = 1$ | | | 100 | | | 70 | | MHz |
| t_s | Settling Time | To 0.1% of V_{FINAL} , $V_{STEP} = 2\text{V}$ | | | 20 | | | 25 | | ns |
| t_f , t_r | Small-Signal Rise and Fall Time | 10% to 90%, $V_{OUT} = 100\text{mV}_{P-P}$ | | | 3 | | | 5.6 | | ns |
| dG | Differential Gain | (Note 9) | | | 0.35 | | | 0.42 | | % |
| dP | Differential Phase | (Note 9) | | | 0.30 | | | 0.44 | | Deg |
| HD2 | 2nd Harmonic Distortion | $f = 1\text{MHz}$, $V_{OUT} = 2\text{V}_{P-P}$ | | | -65 | | | -60 | | dBc |
| HD3 | 3rd Harmonic Distortion | $f = 1\text{MHz}$, $V_{OUT} = 2\text{V}_{P-P}$ | | | -65 | | | -65 | | dBc |

($I_S = 300\mu\text{A}$ per Amplifier) The ● denotes the specifications which apply over the specified operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$. For $V^+ = 5\text{V}$, $V^- = -5\text{V}$: $R_{SET} = 1\text{M}$ to ground, $A_V = +2$, $R_F = R_G = 11\text{k}$, $R_L = 1\text{k}$; For $V^+ = 3\text{V}$, $V^- = 0\text{V}$: $R_{SET} = 270\text{k}$ to V^- , $A_V = +2$, $R_F = 9.31\text{k}$, $R_G = 9.31\text{k}$ to 1.5V , $R_L = 1\text{k}$ to 1.5V unless otherwise specified.

| SYMBOL | PARAMETER | CONDITIONS | | $V^+ = 5\text{V}$, $V^- = -5\text{V}$, $I_S = 300\mu\text{A}$ | | | $V^+ = 3\text{V}$, $V^- = 0\text{V}$, $I_S = 300\mu\text{A}$ | | | UNITS |
|------------|--------------------------------|---|---|---|-------|-----------------------|--|------|----------------------|--------------------------------|
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| V_{OS} | Input Offset Voltage | | ● | | -1 | ± 4.5 ± 8 | | -1.5 | ± 4.5 ± 8 | mV mV |
| I_{IN^+} | Noninverting Input Current | | ● | | 0.2 | ± 1 ± 2 | | 0.2 | ± 1 ± 1.5 | μA μA |
| I_{IN^-} | Inverting Input Current | | ● | | -3 | ± 8.5 ± 11 | | -0.5 | ± 3 ± 4.5 | μA μA |
| e_n | Input Noise Voltage Density | $f = 1\text{kHz}$, $R_F = 13\text{k}$, $R_G = 681\Omega$, $R_S = 0\Omega$ | | | 13.5 | | | 13.5 | | $\text{nV}/\sqrt{\text{Hz}}$ |
| $+i_n$ | Input Noise Current Density | $f = 1\text{kHz}$ | | | 0.75 | | | 0.75 | | $\text{pA}/\sqrt{\text{Hz}}$ |
| $-i_n$ | Input Noise Current Density | $f = 1\text{kHz}$ | | | 5 | | | 5 | | $\text{pA}/\sqrt{\text{Hz}}$ |
| R_{IN^+} | Noninverting Input Resistance | $V_{IN} = V^+ - 1.2\text{V}$ to $V^- + 1.2\text{V}$ (Note 8) | ● | 1 | 25 | | 1 | 15 | | $\text{M}\Omega$ |
| C_{IN^+} | Noninverting Input Capacitance | $f = 100\text{kHz}$ | | | 2 | | | 2 | | pF |
| V_{INH} | Input Voltage Range, High | (Note 10) | ● | 3.8 | 4.1 | | 1.8 | 2.1 | | V |
| V_{INL} | Input Voltage Range, Low | (Note 10) | ● | | -4.1 | -3.8 | | 0.9 | 1.2 | V |
| V_{OUTH} | Output Voltage Swing, High | $R_L = 1\text{k}$ (Note 11) | ● | 4.75 4.7 | 4.85 | | 2.75 2.7 | 2.85 | | V V |
| V_{OUTL} | Output Voltage Swing, Low | $R_L = 1\text{k}$ (Note 11) | ● | | -4.95 | -4.85 -4.8 | | 0.05 | 0.15 0.2 | V V |

ELECTRICAL CHARACTERISTICS (I_S = 300μA per Amplifier) The ● denotes the specifications which apply over the specified operating temperature range, otherwise specifications are at T_A = 25°C. For V⁺ = 5V, V⁻ = -5V: R_{SET} = 1M to ground, A_V = +2, R_F = R_G = 11k, R_L = 1k; For V⁺ = 3V, V⁻ = 0V: R_{SET} = 270k to V⁻, A_V = +2, R_F = 9.31k, R_G = 9.31k to 1.5V, R_L = 1k to 1.5V unless otherwise specified.

| SYMBOL | PARAMETER | CONDITIONS | | V ⁺ = 5V, V ⁻ = -5V, I _S = 300μA | | | V ⁺ = 3V, V ⁻ = 0V, I _S = 300μA | | | UNITS |
|---------------------------------|--|--|---|---|------|--------------|--|--------------|-----|--------------|
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| CMRR | Common Mode Rejection Ratio | V _{IN} = V ⁺ - 1.2V to V ⁻ + 1.2V | ● | 46 43 | 50 | | 46 | | | dB dB |
| -I _{CMRR} | Inverting Input Current Common Mode Rejection | V _{IN} = V ⁺ - 1.2V to V ⁻ + 1.2V | ● | | 0.15 | ±1.5 ±2 | 0.2 | | | μA/V μA/V |
| PSRR | Power Supply Rejection Ratio | V _S = ±1.5V to ±6V (Note 6) | ● | 60 | 85 | | 60 | 85 | | dB |
| -I _{PSRR} | Inverting Input Current Power Supply Rejection | V _S = ±1.5V to ±6V (Note 6) | ● | | 0.4 | ±2.2 ±4 | 0.4 | ±2.2 ±4 | | μA/V μA/V |
| I _S | Supply Current per Amplifier | | ● | | 0.3 | 0.525 0.6 | 0.3 | 0.38 0.43 | | mA mA |
| I _{OUT} | Maximum Output Current | R _L = 0Ω (Notes 7, 11) | ● | ±30 | | | ±10 | | | mA |
| R _{OL} | Transimpedance, ΔV _{OUT} /ΔI _{IN} ⁻ | V _{OUT} = V ⁺ - 1.2V to V ⁻ + 1.2V | | 300 | 660 | | 65 | 120 | | kΩ |
| SR | Slew Rate | (Note 8) | | 120 | 170 | | 20 | | | V/μs |
| t _{pd} | Propagation Delay | 50% V _{IN} to 50% V _{OUT} , 100mV _{P-P} , Larger of t _{pd} ⁺ , t _{pd} ⁻ | | | 30 | | 50 | | | ns |
| BW | -3dB Bandwidth | <1dB Peaking, A _V = 1 | | | 10 | | 7.5 | | | MHz |
| t _s | Settling Time | To 0.1% of V _{FINAL} , V _{STEP} = 2V | | | 200 | | 300 | | | ns |
| t _f , t _r | Small-Signal Rise and Fall Time | 10% to 90%, V _{OUT} = 100mV _{P-P} | | | 40 | | 50 | | | ns |
| HD2 | 2nd Harmonic Distortion | f = 1MHz, V _{OUT} = 2V _{P-P} | | | -40 | | -45 | | | dBc |
| HD3 | 3rd Harmonic Distortion | f = 1MHz, V _{OUT} = 2V _{P-P} | | | -45 | | -45 | | | dBc |

Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 2: As long as output current and junction temperature are kept below the absolute maximum ratings, no damage to the part will occur. Depending on the supply voltage, a heat sink may be required.

Note 3: The LT6210C/LT6211C is guaranteed functional over the operating temperature range of -40°C to 85°C.

Note 4: The LT6210C/LT6211C is guaranteed to meet specified performance from 0°C to 70°C. The LT6210C/LT6211C is designed, characterized and expected to meet specified performance from -40°C and 85°C but is not tested or QA sampled at these temperatures. The LT6210I/LT6211I is guaranteed to meet specified performance from -40°C to 85°C.

Note 5: The LT6210 with no metal connected to the V⁻ pin has a θ_{JA} of 230°C/W, however, thermal resistances vary depending upon the amount of PC board metal attached to Pin 2 of the device. With the LT6210 mounted on a 2500mm² 3/32" FR-4 board covered with 2oz copper on both sides and with just 20mm² of copper attached to Pin 2, θ_{JA} drops to 160°C/W. Thermal performance can be improved even further by using a 4-layer board or by attaching more metal area to Pin 2.

Thermal resistance of the LT6211 in MSOP-10 is specified for a 2500mm² 3/32" FR-4 board covered with 2oz copper on both sides and with 100mm² of copper attached to Pin 5. Its performance can also be increased with additional copper much like the LT6210.

To achieve the specified θ_{JA} of 43°C/W for the LT6211 DFN-10, the exposed pad must be soldered to the PCB. In this package, θ_{JA} will benefit

from increased copper area attached to the exposed pad.

T_J is calculated from the ambient temperature T_A and the power dissipation PD according to the following formula:

$$T_J = T_A + (P_D \cdot \theta_{JA})$$

The maximum power dissipation can be calculated by:

$$P_{D(MAX)} = (V_S \cdot I_{S(MAX)}) + (V_S/2)^2/R_{LOAD}$$

Note 6: For PSRR and -IPSRR testing, the current into the I_{SET} pin is constant, maintaining a consistent LT6210/LT6211 quiescent bias point. A graph of PSRR vs Frequency is included in the Typical Performance Characteristics showing +PSRR and -PSRR with R_{SET} connecting I_{SET} to ground.

Note 7: While the LT6210 and LT6211 circuitry is capable of significant output current even beyond the levels specified, sustained short-circuit current exceeding the Absolute Maximum Rating of ±80mA may permanently damage the device.

Note 8: This parameter is guaranteed to meet specified performance through design and characterization. It is not production tested.

Note 9: Differential gain and phase are measured using a Tektronix TSG120YC/NTSC signal generator and a Tektronix 1780R Video Measurement Set. The resolution of this equipment is 0.1% and 0.1°. Five identical amplifier stages were cascaded giving an effective resolution of 0.02% and 0.02°.

Note 10: Input voltage range on ±5V dual supplies is guaranteed by CMRR. On 3V single supply it is guaranteed by design and by correlation to the ±5V input voltage range limits.


Note 11: This parameter is tested by forcing a 50mV differential voltage between the inverting and noninverting inputs.

TYPICAL AC PERFORMANCE


| V_S (V) | I_S (mA) per Amplifier | R_{SET} (Ω) | A_V | R_L (Ω) | R_F (Ω) | R_G (Ω) | SMALL-SIGNAL –3dB BW, <1dB PEAKING (MHz) | SMALL-SIGNAL ± 0.1 dB BW (MHz) |
|-----------|--------------------------|------------------------|-------|--------------------|--------------------|--------------------|---|---------------------------------------|
| ± 5 | 6 | 20k | 1 | 150 | 1200 | — | 200 | 30 |
| ± 5 | 6 | 20k | 2 | 150 | 887 | 887 | 160 | 30 |
| ± 5 | 6 | 20k | –1 | 150 | 698 | 698 | 140 | 20 |
| ± 5 | 3 | 56k | 1 | 150 | 1690 | — | 100 | 15 |
| ± 5 | 3 | 56k | 2 | 150 | 1100 | 1100 | 100 | 15 |
| ± 5 | 3 | 56k | –1 | 150 | 1200 | 1200 | 80 | 15 |
| ± 5 | 0.3 | 1M | 1 | 1k | 13.7k | — | 10 | 2 |
| ± 5 | 0.3 | 1M | 2 | 1k | 11k | 11k | 10 | 2 |
| ± 5 | 0.3 | 1M | –1 | 1k | 10k | 10k | 10 | 1.8 |
| 3, 0 | 6 | 0 | 1 | 150 | 1100 | — | 120 | 20 |
| 3, 0 | 6 | 0 | 2 | 150 | 887 | 887 | 100 | 20 |
| 3, 0 | 6 | 0 | –1 | 150 | 806 | 806 | 100 | 20 |
| 3, 0 | 3 | 10k | 1 | 150 | 1540 | — | 70 | 15 |
| 3, 0 | 3 | 10k | 2 | 150 | 1270 | 1270 | 60 | 15 |
| 3, 0 | 3 | 10k | –1 | 150 | 1200 | 1200 | 60 | 15 |
| 3, 0 | 0.3 | 270k | 1 | 1k | 13k | — | 7.5 | 2 |
| 3, 0 | 0.3 | 270k | 2 | 1k | 9.31k | 9.31k | 7 | 1.5 |
| 3, 0 | 0.3 | 270k | –1 | 1k | 10k | 10k | 7 | 1.5 |

TYPICAL PERFORMANCE CHARACTERISTICS


Supply Current per Amplifier vs Temperature

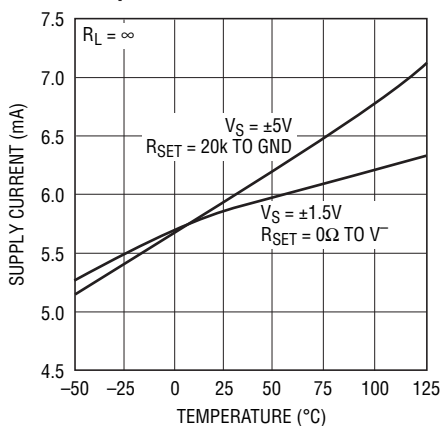

Supply Current per Amplifier vs Temperature

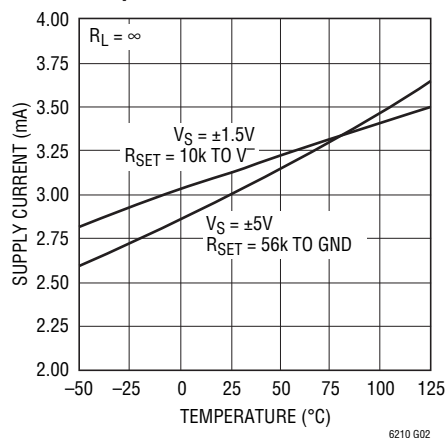


Supply Current per Amplifier vs Temperature

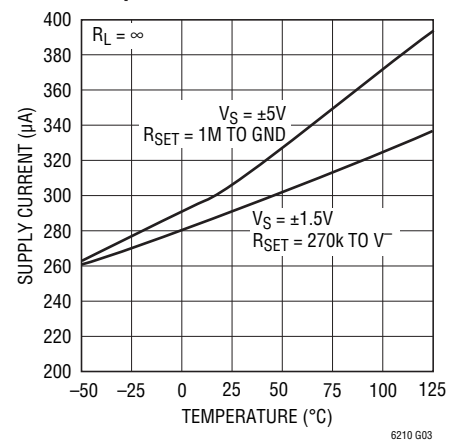


TYPICAL PERFORMANCE CHARACTERISTICS (Supply Current Is Measured Per Amplifier)


Input Noise Spectral Density
($I_S = 6\text{mA}$ per Amplifier)

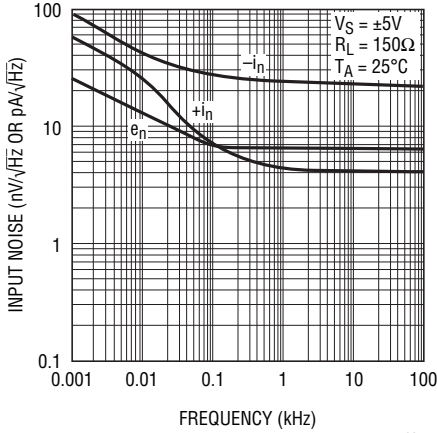


Input Noise Spectral Density
($I_S = 3\text{mA}$ per Amplifier)

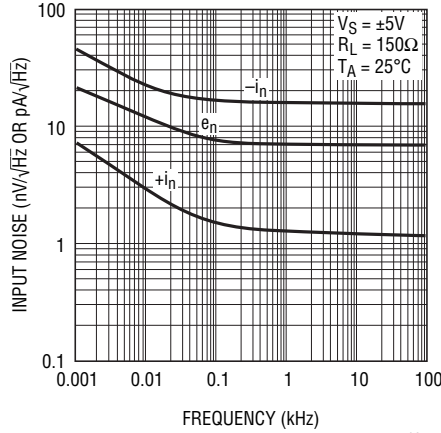


Input Noise Spectral Density
($I_S = 300\mu\text{A}$ per Amplifier)

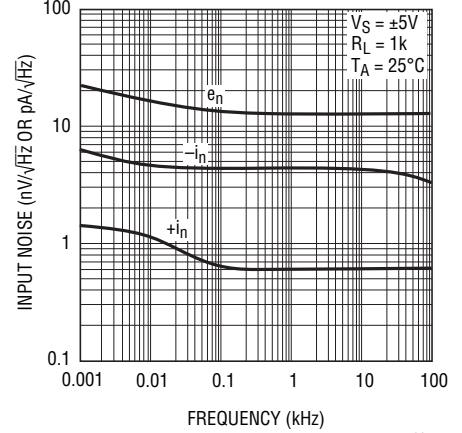


Input Offset Voltage vs Input Common Mode Voltage

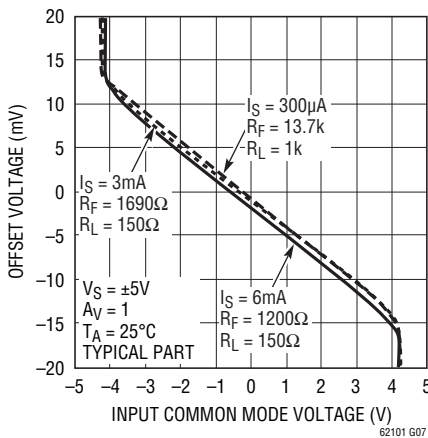


Input Common Mode Range vs Temperature

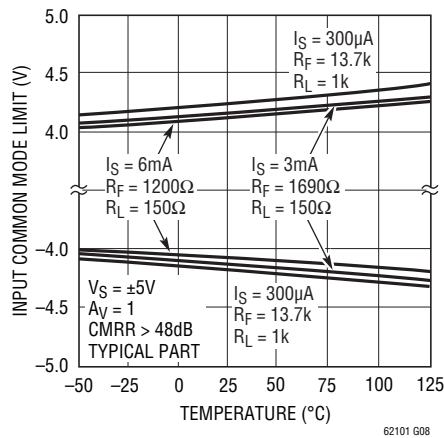


Input Common Mode Range vs Temperature

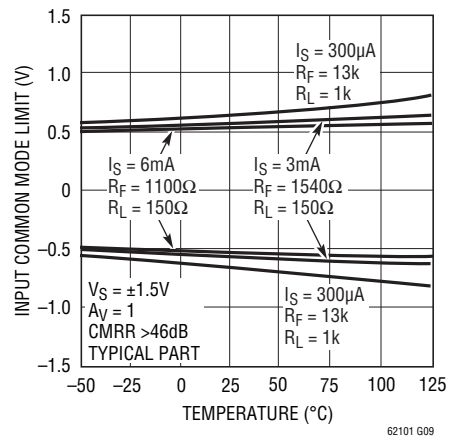


Output Voltage Swing vs Temperature

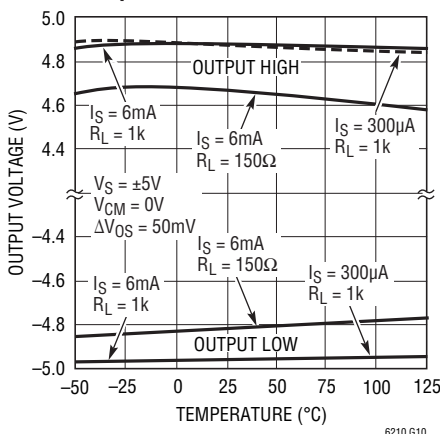

Output Voltage Swing vs Temperature

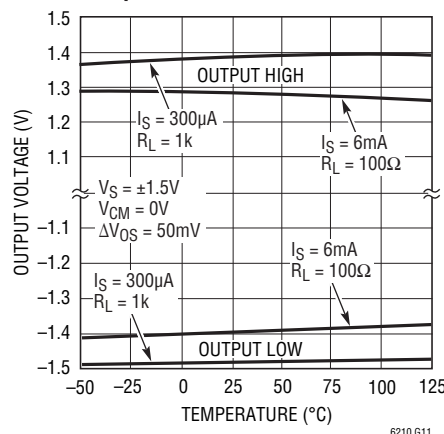


Output Voltage Swing vs I_{LOAD}

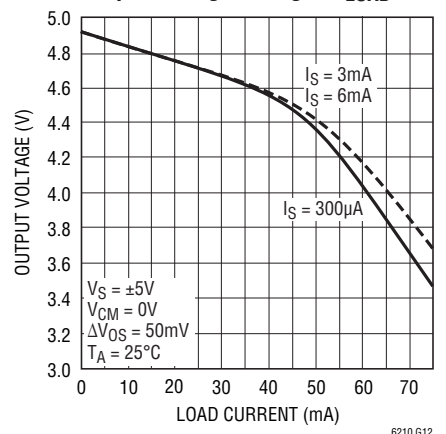


TYPICAL PERFORMANCE CHARACTERISTICS (Supply Current I_S Measured Per Amplifier)

Output Voltage Swing vs I_{LOAD}

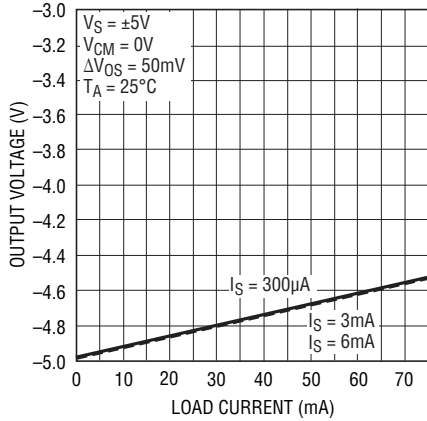


6210 G13

Output Voltage Swing vs I_{LOAD}

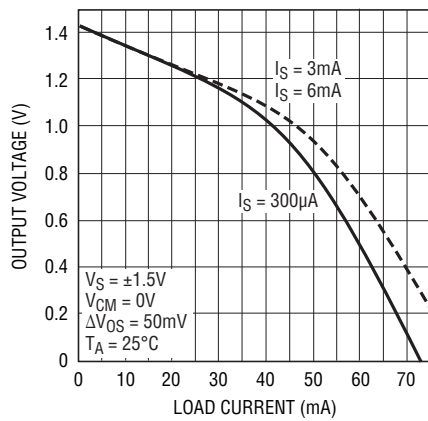


6210 G14

Output Voltage Swing vs I_{LOAD}

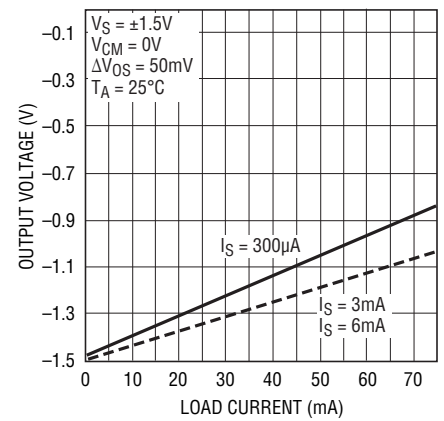


6210 G15

CMRR and PSRR vs Frequency ($I_S = 6mA$ per Amplifier)

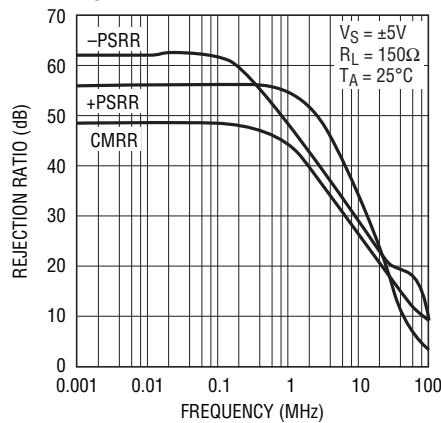


6210 G16

CMRR and PSRR vs Frequency ($I_S = 3mA$ per Amplifier)

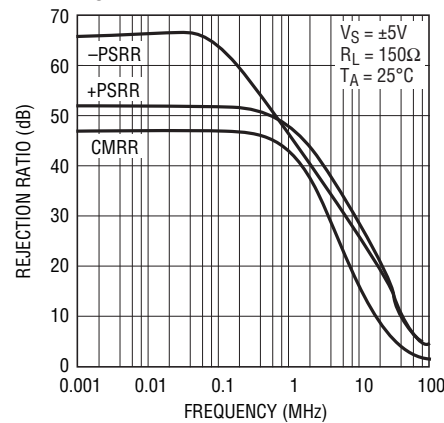


6210 G17

CMRR and PSRR vs Frequency ($I_S = 300μA$ per Amplifier)

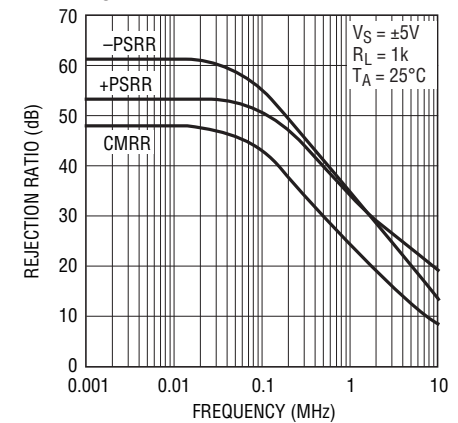


6210 G18

Frequency Response vs Closed Loop Gain ($I_S = 6mA$ per Amplifier)

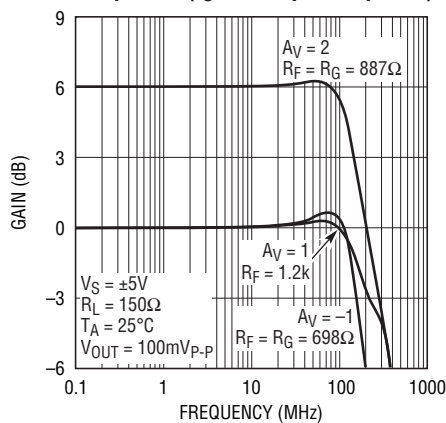


6210 G19

Frequency Response vs Closed Loop Gain ($I_S = 3mA$ per Amplifier)

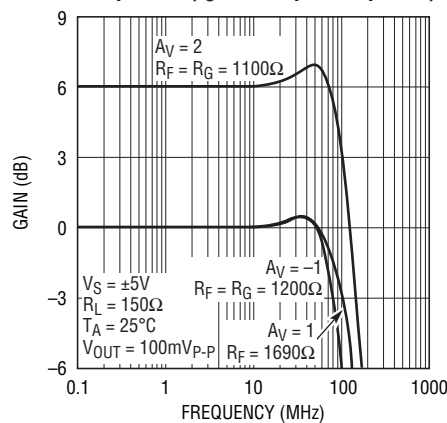

6210 G20


Frequency Response vs Closed Loop Gain ($I_S = 300μA$ per Amplifier)

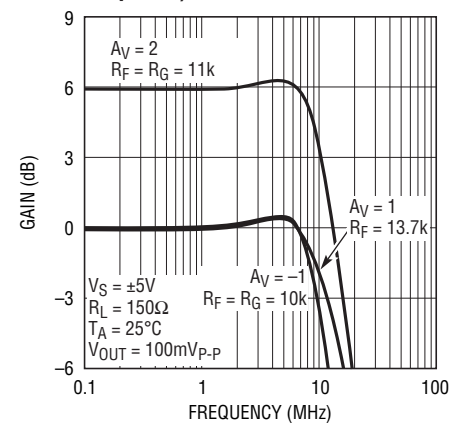

6210 G21


TYPICAL PERFORMANCE CHARACTERISTICS (Supply Current Is Measured Per Amplifier)

2nd and 3rd Harmonic Distortion vs Frequency ($I_S = 6\text{mA}$ per Amplifier)

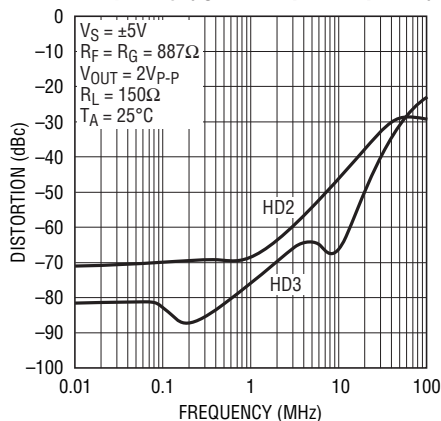


6210 G22

2nd and 3rd Harmonic Distortion vs Frequency ($I_S = 3\text{mA}$ per Amplifier)

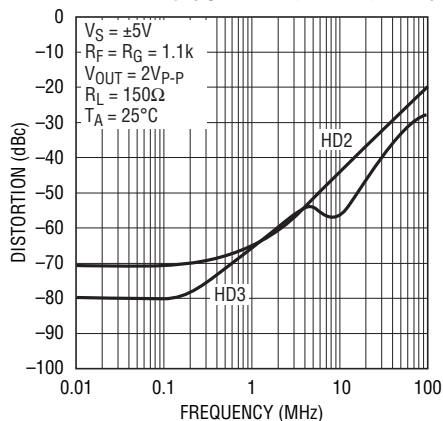


6210 G23

2nd and 3rd Harmonic Distortion vs Frequency ($I_S = 300\mu\text{A}$ per Amplifier)

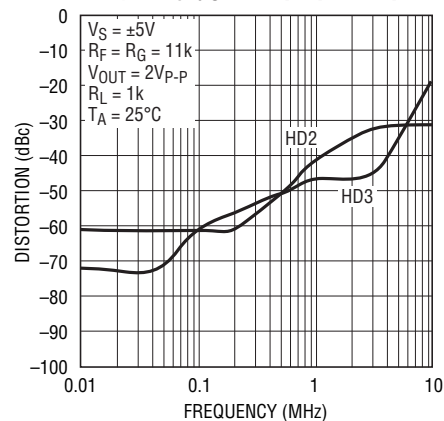


6210 G24

Maximum Undistorted Output Sinusoid vs Frequency

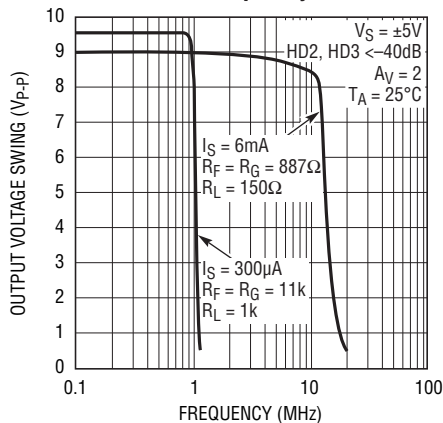


6210 G25

Output Impedance vs Frequency

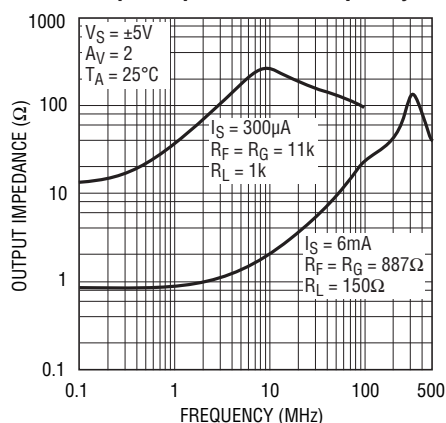


6210 G26

LT6211 Channel Separation vs Frequency

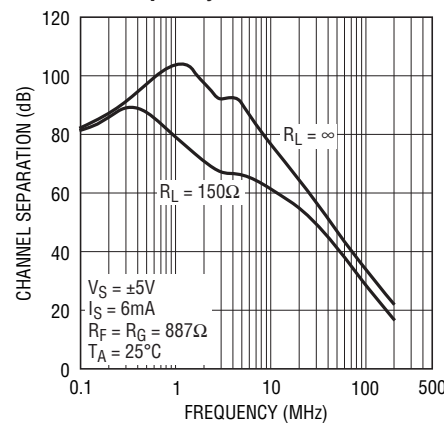


6210 G27

Overshoot vs Capacitive Load

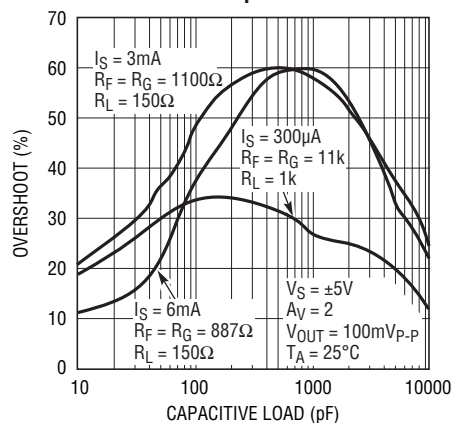


6210 G28

Maximum Capacitive Load vs Output Series Resistor

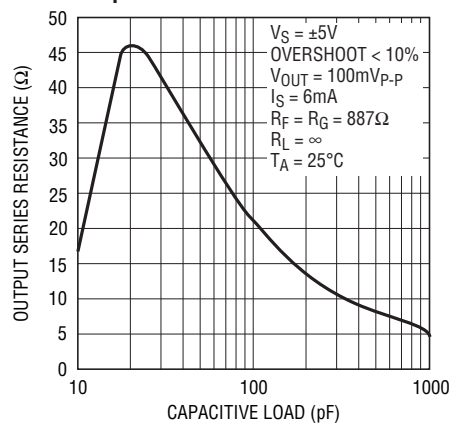

6210 G29

Maximum Capacitive Load vs Feedback Resistor

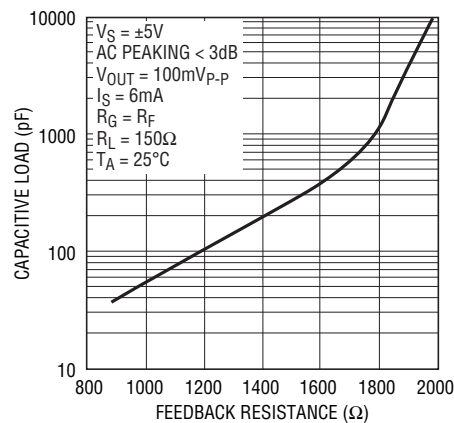


6210 G30


62101fc

TYPICAL PERFORMANCE CHARACTERISTICS (Supply Current Is Measured Per Amplifier)


-3dB Small-Signal Bandwidth vs Supply Current

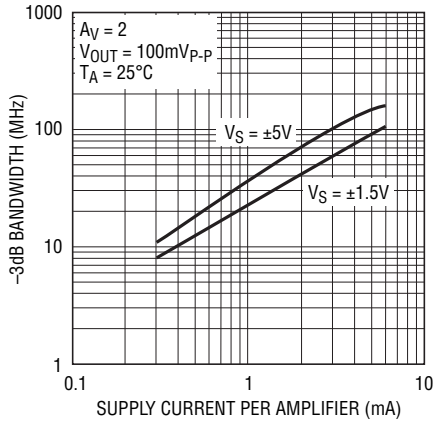


Slew Rate vs Supply Current

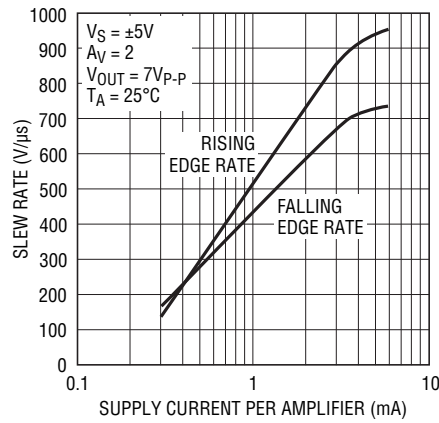

1MHz 2nd and 3rd Harmonic Distortion vs Supply Current

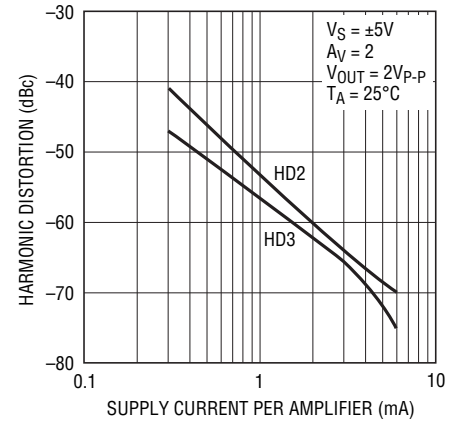


Small-Signal Transient Response ($I_S = 6mA$ per Amplifier)

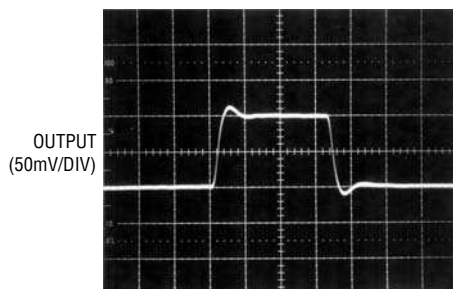


$V_S = \pm 5V$
 $V_{IN} = \pm 25mV$
 $R_F = R_G = 887\Omega$
 $R_{SET} = 20k$ TO GND
 $R_L = 150\Omega$

Small-Signal Transient Response ($I_S = 3mA$ per Amplifier)

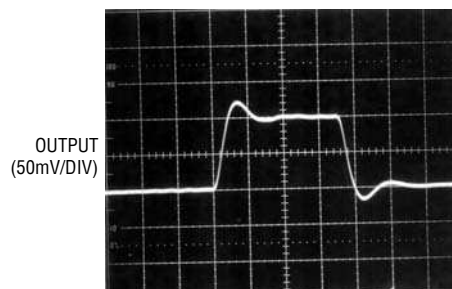


$V_S = \pm 5V$
 $V_{IN} = \pm 25mV$
 $R_F = R_G = 1.1k$
 $R_{SET} = 56k$ TO GND
 $R_L = 150\Omega$

Small-Signal Transient Response ($I_S = 300\mu A$ per Amplifier)

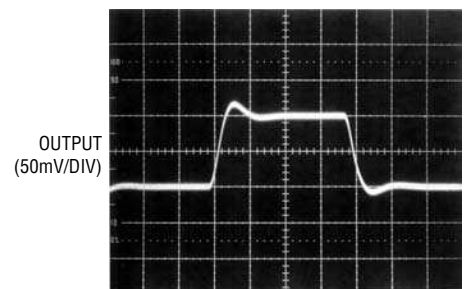


$V_S = \pm 5V$
 $V_{IN} = \pm 25mV$
 $R_F = R_G = 11k$
 $R_{SET} = 1M$ TO GND
 $R_L = 1k$

Large-Signal Transient Response ($I_S = 6mA$ per Amplifier)

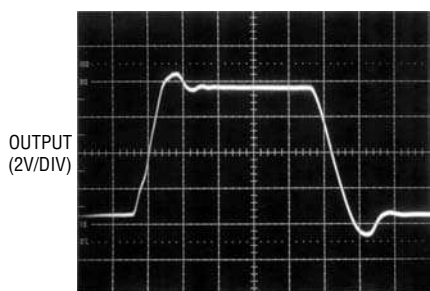


$V_S = \pm 5V$
 $V_{IN} = \pm 1.75V$
 $R_F = R_G = 887\Omega$
 $R_{SET} = 20k$ TO GND
 $R_L = 150\Omega$

Large-Signal Transient Response ($I_S = 3mA$ per Amplifier)

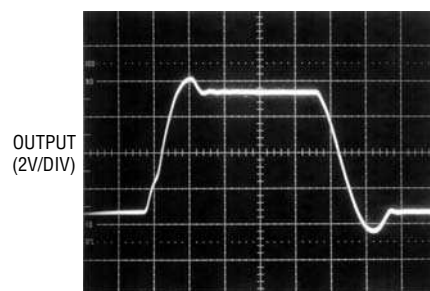

$V_S = \pm 5V$
 $V_{IN} = \pm 1.75V$
 $R_F = R_G = 1.1k$
 $R_{SET} = 56k$ TO GND
 $R_L = 150\Omega$

Large-Signal Transient Response ($I_S = 300\mu A$ per Amplifier)

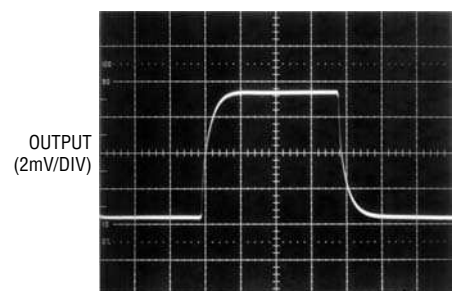

$V_S = \pm 5V$
 $V_{IN} = \pm 1.75V$
 $R_F = R_G = 11k$
 $R_{SET} = 1M$ TO GND
 $R_L = 1k$

APPLICATIONS INFORMATION

Setting the Quiescent Operating Current (I_{SET} Pin)

The quiescent bias point of the LT6210/LT6211 is SET with either an external resistor from the I_{SET} pin to a lower potential or by drawing a current out of the I_{SET} pin. However, the I_{SET} pin is not designed to function as a shutdown. The LT6211 uses two entirely independent bias networks, so while each channel can be programmed for a different supply current, neither I_{SET} pin should be left unconnected. A simplified schematic of the internal biasing structure can be seen in Figure 1. Figure 2 illustrates the results of varying R_{SET} on 3V and $\pm 5V$ supplies. Note that shorting the I_{SET} pin under 3V operation results in a quiescent bias of approximately 6mA. Attempting to bias the LT6210/LT6211 at a current level higher than 6mA by using a smaller resistor may result in instability and decreased performance. However, internal circuitry clamps the supply current of the part at a safe level of approximately 15mA in case of accidental connection of the I_{SET} pin directly to a negative potential.




Figure 1. Internal Bias Setting Circuitry

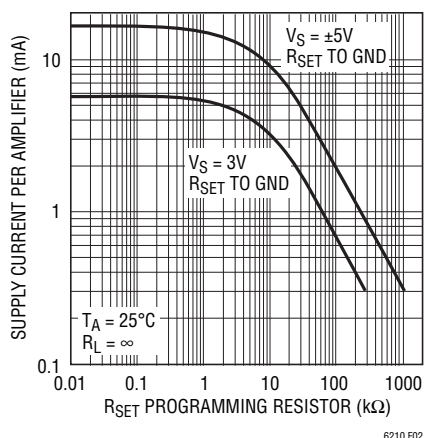


Figure 2. Setting R_{SET} to Control I_s

Input Considerations

The inputs of the LT6210/LT6211 are protected by back-to-back diodes. If the differential input voltage exceeds 1.4V, the input current should be limited to less than the absolute maximum ratings of $\pm 10mA$. In normal operation, the differential voltage between the inputs is small, so the $\pm 1.4V$ limit is generally not an issue. ESD diodes protect both inputs, so although the part is not guaranteed to function outside the common mode range, input voltages that exceed a diode beyond either supply will also require current limiting to keep the input current below the absolute maximum of $\pm 10mA$.

Feedback Resistor Selection

The small-signal bandwidth of the LT6210/LT6211 is set by the external feedback resistors and the internal junction capacitances. As a result, the bandwidth is a function of the quiescent supply current, the supply voltage, the value of the feedback resistor, the closed-loop gain and the load resistor. Refer to the Typical AC Performance table for more information.

Layout and Passive Components

As with all high speed amplifiers, the LT6210/LT6211 require some attention to board layout. Low ESL/ESR bypass capacitors should be placed directly at the positive and negative supply (0.1 μF ceramics are recommended). For best transient performance, additional 4.7 μF tantalums should be added. A ground plane is recommended and trace lengths should be minimized, especially on the inverting input lead.

Capacitance on the Inverting Input

Current feedback amplifiers require resistive feedback from the output to the inverting input for stable operation. Capacitance on the inverting input will cause peaking in the frequency response and overshoot in the transient response. Take care to minimize the stray capacitance at the inverting input to ground and between the output and the inverting input. If significant capacitance is unavoidable in a given application, an inverting gain configuration should be considered. When configured inverting, the amplifier inputs do not slew and the effect of parasitics is greatly reduced.

APPLICATIONS INFORMATION

Capacitive Loads

The LT6210/LT6211 are stable with any capacitive load. Although peaking and overshoot may result in the AC transient response, the amplifier's compensation decreases bandwidth with increasing output capacitive load to ensure stability. To maintain a response with minimal peaking, the feedback resistor can be increased at the cost of bandwidth as shown in the Typical Performance Characteristics. Alternatively, a small resistor (5Ω to 35Ω) can be put in series with the output to isolate the capacitive load from the amplifier output. This has the advantage that the amplifier bandwidth is only reduced when the capacitive load is present. The disadvantage of this technique is that the gain is a function of the load resistance.

Power Supplies

The LT6210/LT6211 will operate on single supplies from 3V to 12V and on split supplies from $\pm 1.5\text{V}$ to $\pm 6\text{V}$. If split supplies of unequal absolute value are used, input offset voltage and inverting input current will shift from the values specified in the Electrical Characteristics table. Input offset voltage will shift 2mV and inverting input current will shift $0.5\mu\text{A}$ for each volt of supply mismatch.

Slew Rate

Unlike a traditional voltage feedback op amp, the slew rate of a current feedback amplifier is not independent of the amplifier gain configuration. In a current feedback amplifier, both the input stage and the output stage have slew rate limitations. In the inverting mode, and for gains of 2 or more in the noninverting mode, the signal amplitude between the input pins is small and the overall slew rate

is that of the output stage. For gains less than 2 in the noninverting mode, the overall slew rate is limited by the input stage. The input slew rate of the LT6210/LT6211 on $\pm 5\text{V}$ supplies with an R_{SET} resistor of 20k ($I_{\text{S}} = 6\text{mA}$) is approximately $600\text{V}/\mu\text{s}$ and is set by internal currents and capacitances. The output slew rate is additionally constrained by the value of the feedback resistor and internal capacitance. At a gain of 2 with 887Ω feedback and gain resistors, $\pm 5\text{V}$ supplies and the same biasing as above, the output slew rate is typically $700\text{V}/\mu\text{s}$. Larger feedback resistors, lower supply voltages and lower supply current levels will all reduce slew rate. Input slew rates significantly exceeding the output slew capability can actually decrease slew performance in a positive gain configuration; the cleanest transient response will be obtained from input signals with slew rates slower than $1000\text{V}/\mu\text{s}$.

Output Swing and Drive

The output stage of the LT6210/LT6211 consists of a pair of class-AB biased common emitters that enable the output to swing rail-to-rail. Since the amplifiers can potentially deliver output currents well beyond the specified minimum short-circuit current, care should be taken not to short the output of the device indefinitely. Attention must be paid to keep the junction temperature of the IC below the absolute maximum rating of 150°C if the output is used to drive low impedance loads. See Note 5 for details. Additionally, the output of the amplifier has reverse-biased ESD diodes connected to each supply. If the output is forced beyond either supply, large currents will flow through these diodes. If the current is limited to 80mA or less, no damage to the part will occur.

TYPICAL APPLICATIONS

3V Cable Driver with Active Termination

Driving back-terminated cables on single supplies usually results in very limited signal amplitude at the receiving end of the cable. However, positive feedback can be used to reduce the size of the series back termination resistor, thereby decreasing the attenuation between the series and shunt termination resistors while still maintaining controlled output impedance from the line-driving amplifier. Figure 3 shows the LT6210 using this “active termination” scheme on a single 3V supply. The amplifier is AC-coupled and in an inverting gain configuration to maximize the input

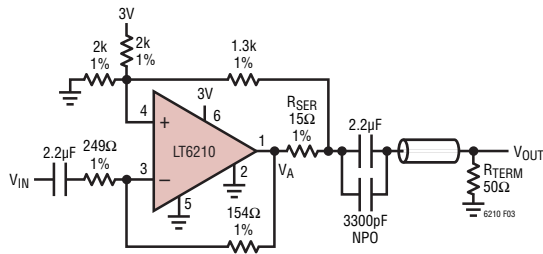


Figure 3. 3V Cable Driver with Active Termination

signal range. The gain from V_{IN} to the receiving end of the cable, V_{OUT} , is set to -1 . The effective impedance looking into the amplifier circuit from the cable is 50Ω throughout the usable bandwidth.

The response of the cable driver with a 1MHz sinusoid is shown in Figure 4. The circuit is capable of transmitting a $1.5V_{P-P}$ undistorted sinusoid to the 50Ω termination resistor and has a full signal $1V_{P-P}$ bandwidth of 50MHz. Small signal $-3dB$ bandwidth extends from 1kHz to 56MHz with the selected coupling capacitors.


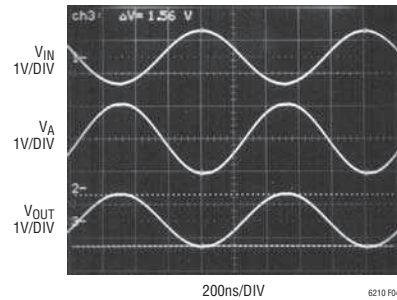


Figure 4. Response of Circuit at 1MHz


SIMPLIFIED SCHEMATIC

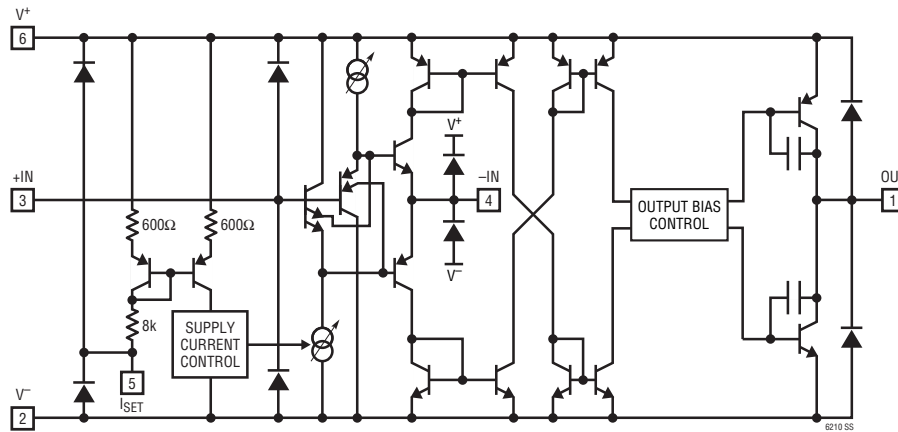

PACKAGE DESCRIPTION


MS Package 10-Lead Plastic MSOP

(Reference LTC DWG # 05-08-1661 Rev E)

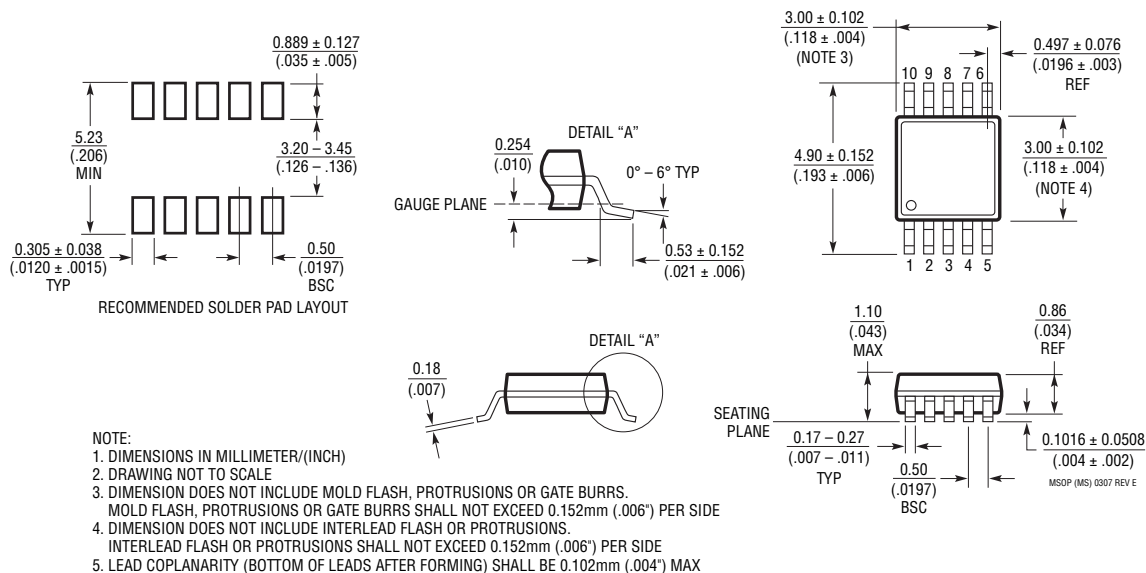

S6 Package 6-Lead Plastic TSOT-23

(Reference LTC DWG # 05-08-1636)

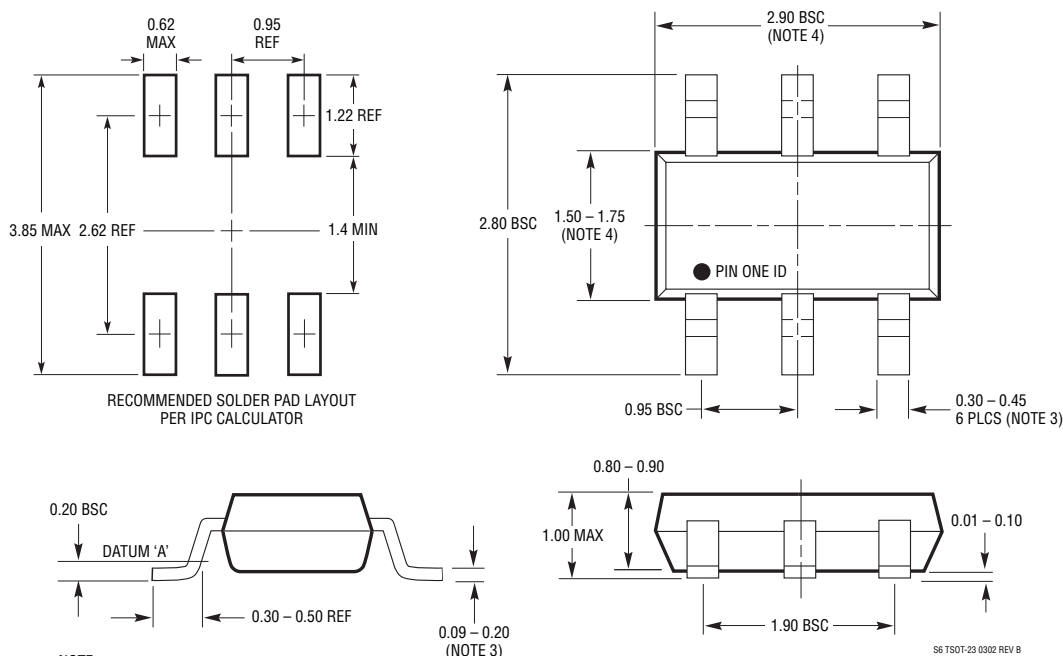

REVISION HISTORY (Revision history begins at Rev C)

| REV | DATE | DESCRIPTION | PAGE NUMBER |
|-----|------|---|-------------|
| C | 3/11 | Revised the tape and reel part numbers and temperature ranges in the Order Information section. | 2 |

TYPICAL APPLICATION

Line Driver with Power Saving Mode

In applications where low distortion or high slew rate are desirable but not necessary at all times, it may be possible to decrease the LT6210 or LT6211’s quiescent current when the higher power performance is not required. Figure 5 illustrates a method of setting quiescent current with a FET switch. In the 5V dual supply case pictured, shorting the I_{SET} pin through an effective 20k to ground sets the supply current to 6mA, while the 240k resistor at the I_{SET} pin with the FET turned off sets the supply current to approximately 1mA. The feedback resistor of 4.02k is selected to minimize peaking in low power mode. The bandwidth

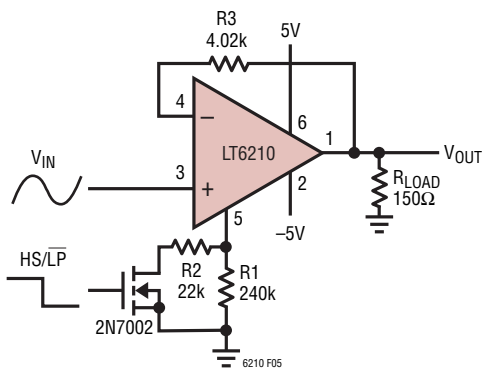


Figure 5. Line Driver with Low Power Mode

of the LT6210 in this circuit increases from about 40MHz in low power mode to over 200MHz in full speed mode, as illustrated in Figure 6. Other AC specs also improve significantly at the higher current setting. The following table shows harmonic distortion at 1MHz with a 2V_{P-P} sinusoid at the two selected current levels.

Harmonic Distortion

| LOW POWER | | FULL SPEED | |
|-----------|--------|------------|--------|
| HD2 | -53dBc | HD2 | -68dBc |
| HD3 | -46dBc | HD3 | -77dBc |

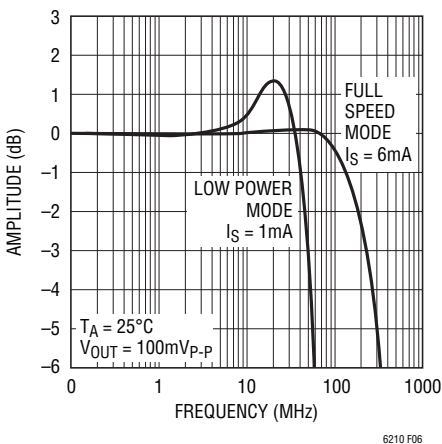


Figure 6. Frequency Response for Full Speed and Low Power Mode

RELATED PARTS

| PART NUMBER | DESCRIPTION | COMMENTS |
|----------------------|--|---|
| LT1252/LT1253/LT1254 | 100MHz Low Cost Video Amplifiers | Single, Dual and Quad Current Feedback Amplifiers |
| LT1395/LT1396/LT1397 | 400MHz, 800V/μs Amplifiers | Single, Dual and Quad Current Feedback Amplifiers |
| LT1398/LT1399 | 300MHz Amplifiers with Shutdown | Dual and Triple Current Feedback Amplifiers |
| LT1795 | 50MHz, 500mA Programmable I _S Amplifier | Dual Current Feedback Amplifier |
| LT1806/LT1807 | 325MHz, 140V/μs Rail-to-Rail I/O Amplifiers | Single and Dual Voltage Feedback Amplifiers |
| LT1815/LT1816/LT1817 | 220MHz, 1500V/μs Programmable I _S Operational Amplifier | Single, Dual and Quad Voltage Feedback Amplifiers |