



0.02 Hz to 1.00 Hz
Fixed Frequency

32-Pin DIP
4 - Pole Filters

Description

The D61 Series of small 4-pole fixed-frequency, precision active filters provide high performance linear active filtering in a compact 32-pin DIP package, with a broad range of corner frequencies and a choice of transfer functions. Individual D61 filters can serve in low-pass or high-pass applications or be combined to create custom band-pass or band reject filters. These fully self-contained units require no external components or adjustments. Each model comes factory tuned to a user-specified corner frequency between 0.02 Hz and 1.00 Hz and operate with low total harmonic distortion over a wide dynamic input voltage range from non-critical +/-5V to +/-18V power supplies.

Features/Benefits:

- Low harmonic distortion and wide signal-to-noise ratio
- Compact 1.8"L x 0.8"W x 0.5"H minimizes board space requirements.
- Plug-in ready-to-use, reducing engineering design and manufacturing cycle time.
- Factory tuned, no external clocks or adjustments needed
- Broad range of transfer characteristics and corner frequencies to meet a wide range of applications.

Applications

- Anti-alias filtering
- Data acquisition systems
- Communication systems and electronics
- Medical electronics equipment and research
- Aerospace, navigation and sonar applications
- Sound and vibration testing
- Acoustic and vibration analysis and control
- Noise elimination
- Signal reconstruction



Available Low-Pass Models:

Page

| | | |
|---------------|--------------------|--------|
| D61L4B | 4-pole Butterworth |2 |
| D61L4L | 4-pole Bessel |2 |

Available High-Pass Models:

| | | |
|---------------|--------------------|--------|
| D61H4B | 4-pole Butterworth |2 |
|---------------|--------------------|--------|

General Specifications:

| | |
|---|------|
| Pin-out/package data & ordering information | ...3 |
|---|------|



4-Pole Low-Pass Filters

Fixed Frequency

| Model | D61L4B | D61L4L | Model | D61H4B |
|---|--|--|---|--|
| Product Specifications | Low-Pass | Low-Pass | | High-Pass |
| Transfer Function | 4-Pole, Butterworth | 4-Pole, Bessel | Transfer Function | 4-Pole, Butterworth |
| Size | 1.8" x 0.8" x 0.5" | 1.8" x 0.8" x 0.5" | Size | 1.8" x 0.8" x 0.5" |
| Range f_c D61 | 0.02 Hz to 1.00 Hz | 0.02 Hz to 1.00 Hz | Range f_c D61 | 0.02 Hz to 1.00 Hz |
| Theoretical Transfer Characteristics | Appendix A Page 7 | Appendix A Page 2 | Theoretical Transfer Characteristics | Appendix A Page 27 |
| Passband Ripple (theoretical) | 0.0 dB | 0.0 dB | Passband Ripple (theoretical) | 0.0 dB |
| DC Voltage Gain (non-inverting) | 0 ± 0.1 dB max. 0 ± 0.05 dB typ. | 0 ± 0.1 dB max. 0 ± 0.05 dB typ. | Voltage Gain (non-inverting) | 0 ± 0.2 dB to 100 kHz 0 ± 0.5 dB to 120 kHz |
| | | | Power Bandwidth | 120 kHz |
| | | | Small Signal Bandwidth | (-6dB) 1 MHz |
| Stopband Attenuation Rate | 24 dB/octave | 24 dB/octave | Stopband Attenuation Rate | 24 dB/octave |
| Cutoff Frequency Stability Amplitude Phase | f _c ± 2% max. ± 0.01% /°C -3dB -180° | f _c ± 2% max. ± 0.01% /°C -3dB -121° | Cutoff Frequency Stability Amplitude Phase | f _c ± 2% max. ± 0.01% /°C -3dB -180° |
| Filter Attenuation (theoretical) | 0.67 dB 0.80 f _c 3.01 dB 1.00 f _c 30.0 dB 2.37 f _c 40.0 dB 3.16 f _c | 1.86 dB 0.80 f _c 3.01 dB 1.00 f _c 30.0 dB 3.50 f _c 40.0 dB 4.72 f _c | Filter Attenuation (theoretical) | 40 dB 0.31 f _c 30 dB 0.42 f _c 3.01 dB 1.00 f _c 0.02 dB 2.00 f _c |
| Phase Match¹ | 0 - 0.8 f _c ± 2° max. ± 1° typ. 0.8 f _c - 1.0 f _c ± 3° max. ± 1.5° typ. | 0 - f _c ± 2° max. ± 1° typ. | Phase Match¹ | 0 - 100 kHz ± 3° max. ± 1.5° typ. |
| Amplitude Accuracy (theoretical) | 0 - 0.8 f _c ± 0.2 dB max. ± 0.1 dB typ. 0.8 f _c - 1.0 f _c ± 0.3 dB max. ± 0.15 dB typ. | 0 - f _c ± 0.2 dB max. ± 0.1 dB typ. | Amplitude Accuracy (theoretical) | 1.0 - 1.25 f _c ± 0.30 dB max. ± 0.15 dB typ. 1.25 f _c - 100 kHz ± 0.20 dB max. ± 0.10 dB typ. |
| Wide Band Noise (5 Hz - 2 MHz) | 200 μVrms typ. | 200 μVrms typ. | Wide Band Noise (5 Hz - 2 MHz) | 400 μVrms typ. |
| Narrow Band Noise (20 Hz - 100 kHz) | 50 μVrms typ. | 50 μVrms typ. | Narrow Band Noise (20 Hz - 100 kHz) | 100 μVrms typ. |
| Filter Mounting Assembly | FMA-01A | FMA-01A | Filter Mounting Assembly | FMA-01A |

1. Unit to unit match for the same transfer function, set to the same frequency and operating configuration, and from the same manufacturing lot.



Specification

(25°C and Vs ± 15 Vdc)

Pin-Out and Package Data Ordering Information

Analog Input Characteristics¹

| | |
|-------------------|------------|
| Impedance | 10 kΩ min. |
| Voltage Range | ± 10 Vpeak |
| Max. Safe Voltage | ± Vs |

Analog Output Characteristics

| | |
|------------------------------|-------------------------|
| Impedance(Closed Loop) | 1 Ω typ. 10 Ω max. |
| Linear Operating Range | ± 10 V |
| Maximum Current ² | ± 2 mA |
| Offset Voltage ³ | 2 mV typ. 10 mV max. |
| Offset Temp. Coeff. | 50 μV / °C |

Power Supply (±V)


| | |
|-----------------------|--------------------------------|
| Rated Voltage | ± 15 Vdc |
| Operating Range | ± 5 to ± 18 Vdc |
| Maximum Safe Voltage | ± 18 Vdc |
| Quiescent Current D61 | ± 12.5 mA typ. ± 20 mA max. |

Temperature



| | |
|-----------|-----------------|
| Operating | 0 to + 70 °C |
| Storage | - 25 to + 85 °C |

Notes:

- Input and output signal voltage referenced to supply common.
- Output is short circuit protected to common. DO NOT CONNECT TO ±Vs.
- Adjustable to zero.

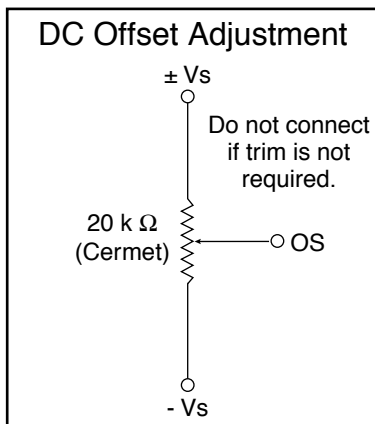

All dimensions are in inches
All case dimensions ± 0.01"

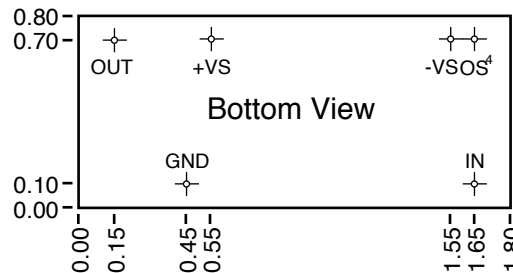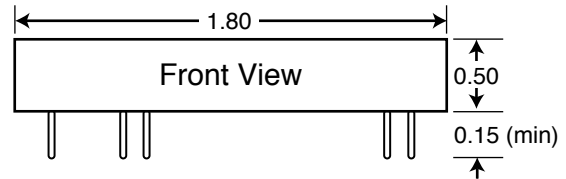

Filter Mounting Assembly-See FMA-01A

Ordering Information

Filter Type

- L - Low Pass
- H - High Pass

Transfer Function

- B - Butterworth
- L - Bessel

D61L4B-0.05 Hz

- 3 dB Corner Frequency⁵

e.g., 0.05 Hz
0.85 Hz
1.00 Hz

4. Units operate with or without offset pin connected.

5. How to Specify Corner Frequency:

Corner frequencies are specified by attaching a three digit frequency designator to the basic model number. Corner frequencies can range from 0.02 Hz to 1.00 Hz.




Appendix A


Theoretical Transfer Characteristics

| f/fc (Hz) | Amp (dB) | Phase (deg) | Delay ¹ (sec) |
|--------------|-------------|----------------|-----------------------------|
| 0.00 | 0.00 | 0.00 | .336 |
| 0.10 | -0.028 | -12.1 | .336 |
| 0.20 | -0.111 | -24.2 | .336 |
| 0.30 | -0.251 | -36.3 | .336 |
| 0.40 | -0.448 | -48.4 | .336 |
| 0.50 | -0.705 | -60.6 | .336 |
| 0.60 | -1.02 | -72.7 | .336 |
| 0.70 | -1.41 | -84.8 | .336 |
| 0.80 | -1.86 | -96.8 | .335 |
| 0.85 | -2.11 | -103 | .334 |
| 0.90 | -2.40 | -109 | .333 |
| 0.95 | -2.69 | -115 | .332 |
| 1.00 | -3.01 | -121 | .330 |
| 1.10 | -3.71 | -133 | .325 |
| 1.20 | -4.51 | -144 | .318 |
| 1.30 | -5.39 | -156 | .308 |
| 1.40 | -6.37 | -166 | .295 |
| 1.50 | -7.42 | -177 | .280 |
| 1.60 | -8.54 | -187 | .263 |
| 1.70 | -9.71 | -195 | .246 |
| 1.80 | -10.9 | -204 | .228 |
| 1.90 | -12.2 | -212 | .211 |
| 2.00 | -13.4 | -219 | .194 |
| 2.25 | -16.5 | -235 | .158 |
| 2.50 | -19.5 | -248 | .129 |
| 2.75 | -22.4 | -259 | .107 |
| 3.00 | -25.1 | -267 | .089 |
| 3.25 | -27.6 | -275 | .076 |
| 3.50 | -30.0 | -281 | .065 |
| 4.00 | -34.4 | -291 | .049 |
| 5.00 | -41.9 | -305 | .031 |
| 6.00 | -48.1 | -315 | .021 |
| 7.00 | -53.4 | -321 | .016 |
| 8.00 | -58.0 | -326 | .012 |
| 9.00 | -62.0 | -330 | .009 |
| 10.0 | -65.7 | -333 | .008 |


Frequency Response

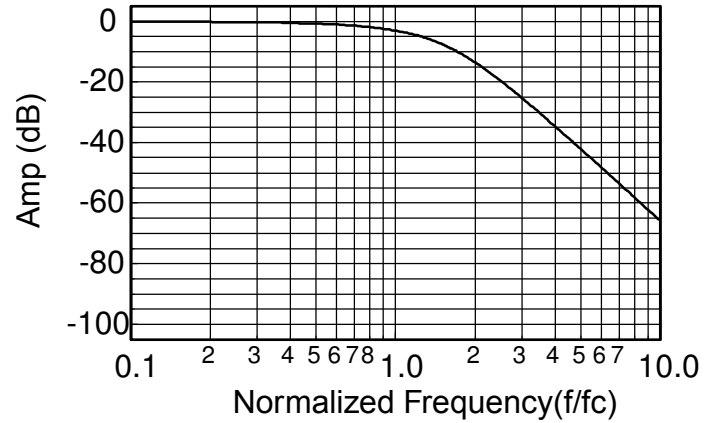

Delay (Normalized)

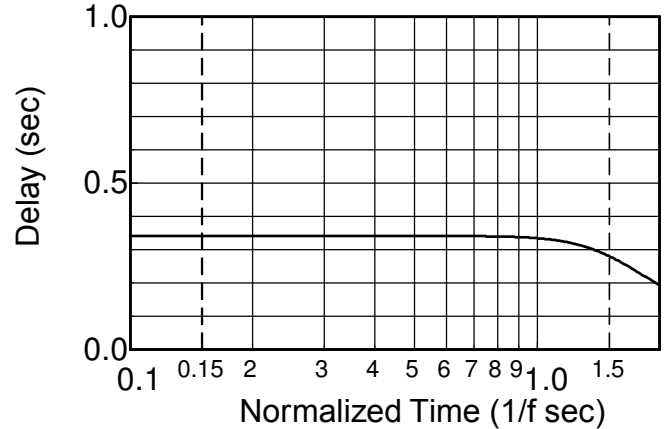

Step Response

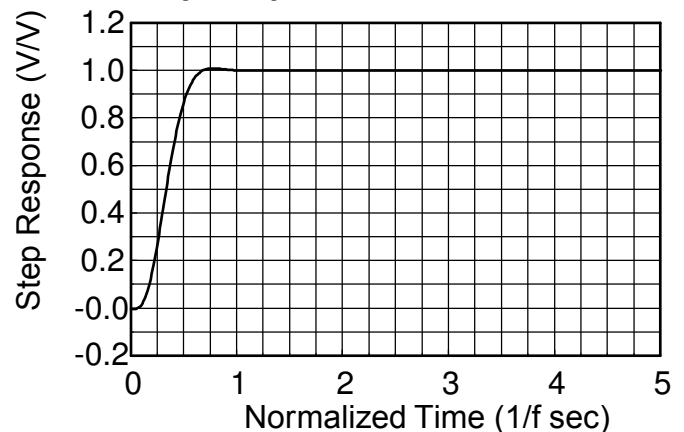

1. Normalized Group Delay:

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).




$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$



Appendix A

Theoretical Transfer Characteristics

| f/fc (Hz) | Amp (dB) | Phase (deg) | Delay ¹ (sec) |
|--------------|-------------|----------------|-----------------------------|
| 0.00 | 0.00 | 0.00 | .416 |
| 0.10 | 0.00 | -15.0 | .418 |
| 0.20 | 0.00 | -30.1 | .423 |
| 0.30 | -0.00 | -45.5 | .433 |
| 0.40 | -0.003 | -61.4 | .449 |
| 0.50 | -0.017 | -78.0 | .474 |
| 0.60 | -0.072 | -95.7 | .511 |
| 0.70 | -0.243 | -115 | .558 |
| 0.80 | -0.674 | -136 | .604 |
| 0.85 | -1.047 | -147 | .619 |
| 0.90 | -1.555 | -158 | .622 |
| 0.95 | -2.21 | -169 | .612 |
| 1.00 | -3.01 | -180 | .588 |
| 1.10 | -4.97 | -200 | .513 |
| 1.20 | -7.24 | -217 | .427 |
| 1.30 | -9.62 | -231 | .350 |
| 1.40 | -12.0 | -242 | .289 |
| 1.50 | -14.3 | -252 | .241 |
| 1.60 | -16.4 | -260 | .204 |
| 1.70 | -18.5 | -266 | .175 |
| 1.80 | -20.5 | -272 | .152 |
| 1.90 | -22.3 | -277 | .134 |
| 2.00 | -24.1 | -282 | .119 |
| 2.25 | -28.2 | -291 | .091 |
| 2.50 | -31.8 | -299 | .072 |
| 2.75 | -35.1 | -304 | .059 |
| 3.00 | -38.2 | -309 | .049 |
| 3.25 | -41.0 | -313 | .041 |
| 3.50 | -43.5 | -317 | .035 |
| 4.00 | -48.2 | -322 | .027 |
| 5.00 | -55.9 | -330 | .017 |
| 6.00 | -62.3 | -335 | .012 |
| 7.00 | -67.6 | -339 | .009 |
| 8.00 | -72.2 | -341 | .007 |
| 9.00 | -76.3 | -343 | .005 |
| 10.0 | -80.0 | -345 | .004 |

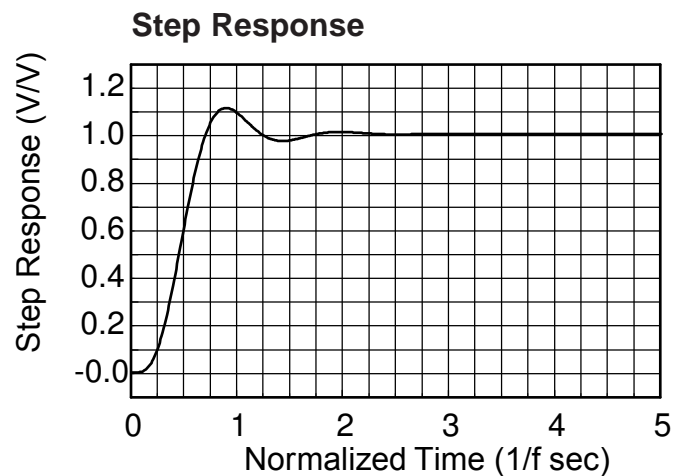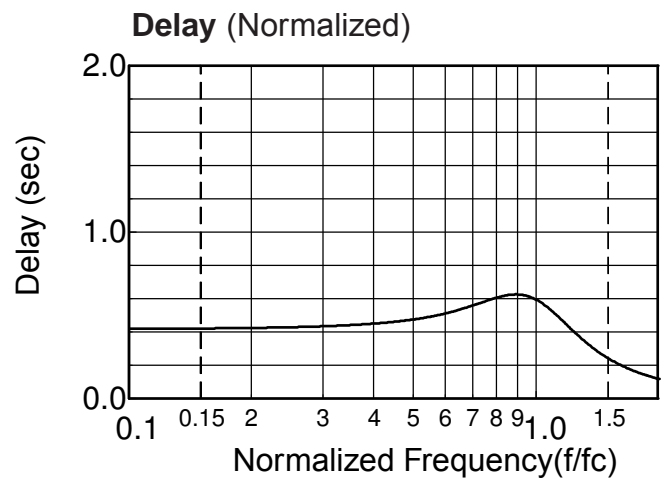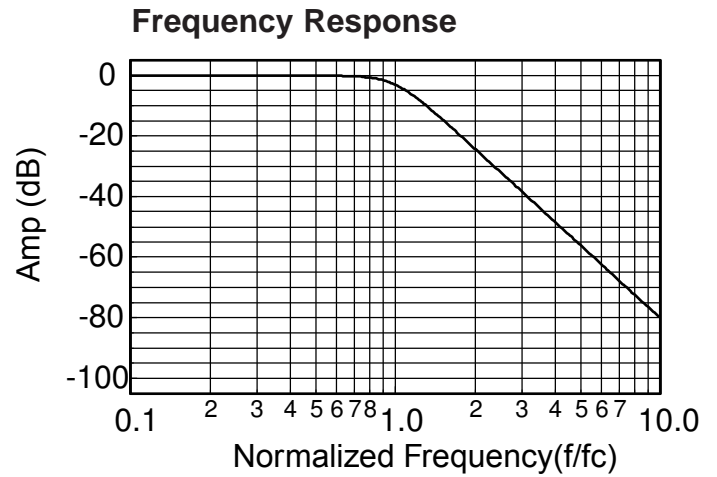

1. Normalized Group Delay:

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).


$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$



Theoretical Transfer Characteristics

| f/fc (Hz) | Amp (dB) | Phase (deg) | Delay ¹ (sec) |
|--------------|-------------|----------------|-----------------------------|
| 0.10 | -80.0 | 345 | .418 |
| 0.20 | -55.9 | 330 | .423 |
| 0.30 | -41.8 | 314 | .433 |
| 0.40 | -31.8 | 299 | .449 |
| 0.50 | -24.1 | 282 | .474 |
| 0.60 | -17.8 | 264 | .511 |
| 0.70 | -12.6 | 245 | .558 |
| 0.80 | -8.43 | 224 | .604 |
| 0.85 | -6.69 | 213 | .619 |
| 0.90 | -5.22 | 202 | .622 |
| 0.95 | -3.99 | 191 | .612 |
| 1.00 | -3.01 | 180 | .588 |
| 1.20 | -0.908 | 143 | .427 |
| 1.40 | -0.285 | 118 | .289 |
| 1.60 | -0.100 | 100 | .204 |
| 1.80 | -0.039 | 87.6 | .152 |
| 2.00 | -0.017 | 78.0 | .119 |
| 2.50 | -0.003 | 61.4 | .072 |
| 3.00 | -0.001 | 50.7 | .049 |
| 4.00 | 0.00 | 37.8 | .027 |
| 5.00 | 0.00 | 30.1 | .017 |
| 6.00 | 0.00 | 25.1 | .012 |
| 7.00 | 0.00 | 21.4 | .009 |
| 8.00 | 0.00 | 18.8 | .007 |
| 9.00 | 0.00 | 16.7 | .005 |
| 10.0 | 0.00 | 15.0 | .004 |

Frequency Response

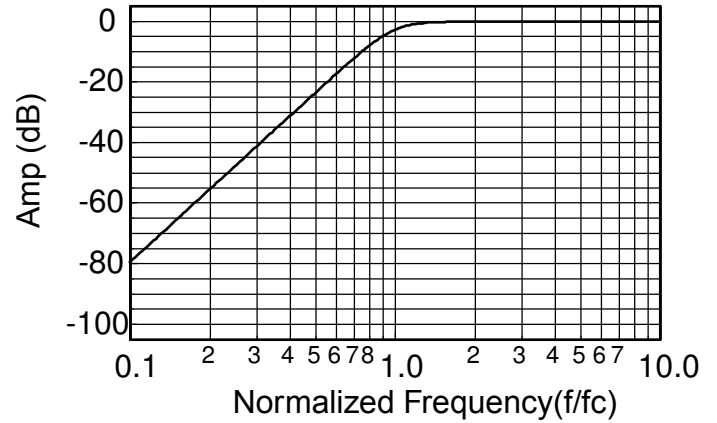

1. Normalized Group Delay:

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$