


NPN Transistor

KC846A,B/KC847A,B,C/KC848A,B,C
(BC846A,B/BC847A,B,C/BC848A,B,C)

■ Features

- Ideally suited for automatic insertion
- For Switching and AF Amplifier Applications

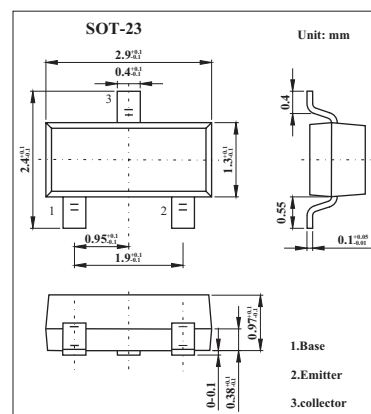

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector-Base Voltage	V _{CB0}	80	V
		50	
		30	
Collector-Emitter Voltage	V _{CEO}	65	V
		45	
		30	
Emitter-Base Voltage	V _{EB0}	6	V
Collector Current -Continuous	I _C	0.1	A
Collector Power Dissipation	P _C	200	mW
Junction Temperature	T _J	150	°C
Storage Temperature	T _{stg}	-65 to +150	°C

KC846A,B/KC847A,B,C/KC848A,B,C (BC846A,B/BC847A,B,C/BC848A,B,C)

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	KC846	$I_C = 10\ \mu A, I_E = 0$	80			V
	KC847		50			
	KC848		30			
Collector-emitter breakdown voltage	KC846	$I_C = 10mA, I_B = 0$	65			V
	KC847		45			
	KC848		30			
Emitter-base Breakdown voltage	V_{EBO}	$I_E = 10\ \mu A, I_C = 0$	6			V
Collector-base cutoff current	KC846	$V_{CB} = 70\ V, I_E = 0$			0.1	μA
	KC847	$V_{CB} = 50\ V, I_E = 0$				
	KC848	$V_{CB} = 30\ V, I_E = 0$				
Collector-emitter cutoff current	KC846	$V_{CE} = 70V, I_B = 0$			0.1	μA
	KC847	$V_{CE} = 50V, I_B = 0$				
	KC848	$V_{CE} = 30V, I_B = 0$				
Emitter-base cutoff current	I_{EBO}	$V_{EB} = 5\ V, I_C = 0$			0.1	μA
DC current gain	KC846A,847A,848A	$V_{CE} = 5\ V, I_C = 2\ mA$	110		220	
	KC846B,847B,848B		200		450	
	KC847C,848C		420		800	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 100\ mA, I_B = 5mA$			0.5	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = 100\ mA, I_B = 5mA$			1.1	V
Collector output capacitance	C_{ob}	$V_{CB}=10V, f=1MHz$			4.5	pF
Transition frequency	f_T	$V_{CE} = 5\ V, I_C = 10\ mA, f = 100\ MHz$	100			MHz

■ Marking

NO.	KC846A	KC846B
Marking	1A	1B

NO.	KC847A	KC847B	KC847C
Marking	1E	1F	1G

NO.	KC848A	KC848B	KC848C
Marking	1J	1K	1L

KC846A,B/KC847A,B,C/KC848A,B,C

(BC846A,B/BC847A,B,C/BC848A,B,C)

Typical Characteristics

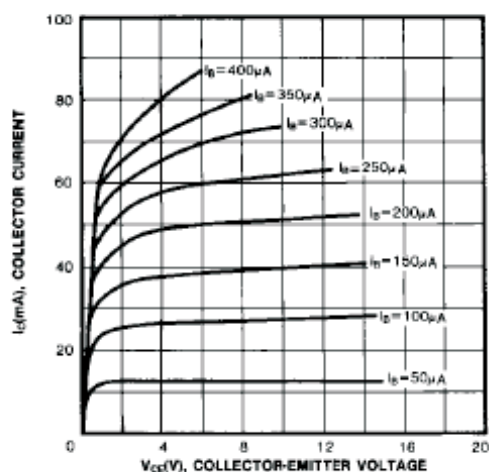


Fig.1 Static Characteristic

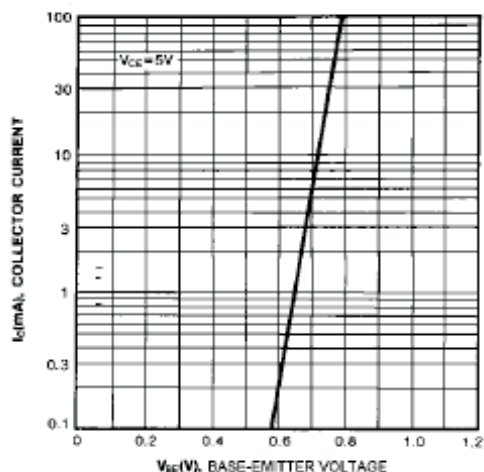


Fig.2 Transfer Characteristic

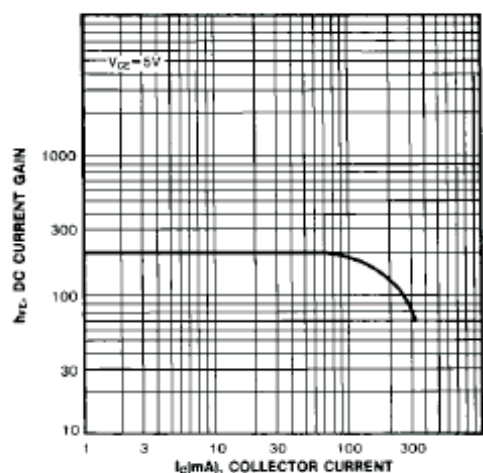


Fig.3 DC Current Gain

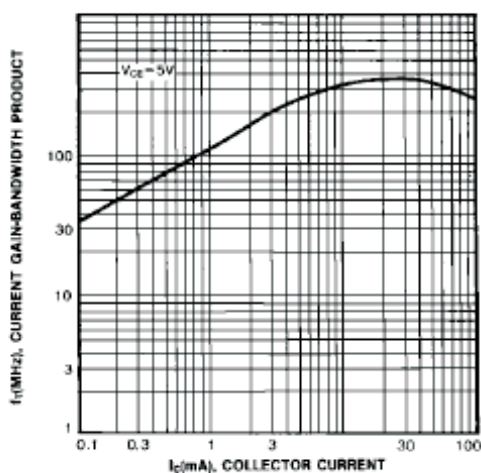


Fig.4 Current Gain Bandwidth Product

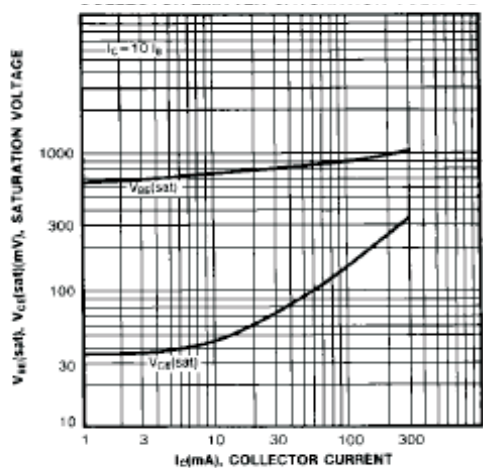


Fig.5 Base Emitter Saturation Voltage

Collector Emitter Saturation Voltage

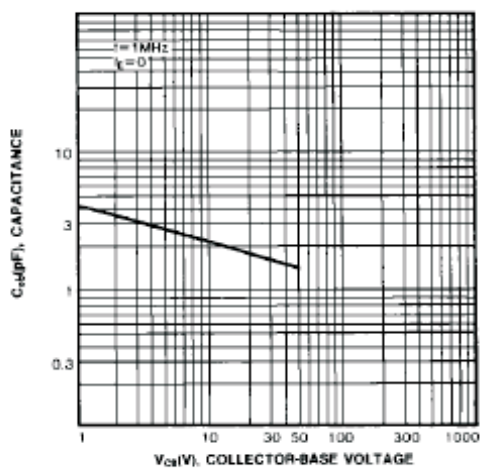


Fig.6 Output Capacitance