



5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 7006
1.0 - 6.0 GHz
50-80 WATTS
BANDED POWER RF AMPLIFIER

**Solid State
 Broadband High
 Power RF Amplifier**

The 7006 is a 50-80W multi channel broadband system that covers the 1.0 – 6.0 GHz frequency range with a single RF input and Single RF output port.

The system includes RF high power switches controlled by the system controller. The RS232/Ethernet and/or Front panel key-pad provides full control and reduces the power consumption to the minimum by shutting down the un-selected channel. The System can be configured in a Rear or Front panel Connectors configuration.

	<u>Parameter</u>	<u>Specification @ 25° C</u>
<u>Electrical</u>		
1	Frequency Range	1.0 – 6.0 GHz
2	Saturated Power Output	80 Watts Min. @ 1.0 to 2.5 GHz 50 Watts Min. @ 2.5 to 6.0 GHz
3	Nominal RF drive for rated power	0 dB typ.
4	Power Flatness	+/-1.5 dB (1.0-2.5GHz) +/-3.0 dB (2.5-6.0GHz)
6	Input VSWR	2:1 max
7	Harmonics	-20 dBc typ.
8	Spurious Signals	< -60 dBc typical
9	Temperature Protection	Baseplate above 80° C
10	AC Power Consumption (only one channel transmit at the time)	900 Watt @ 1.0 to 2.5 GHz 600 Watts @ 2.5 to 6.0 GHz
11	AC Power Input	100-240VAC, 1Ø single Phase
12	Variable Gain Control	25dB via front panel display and/or by RS232/Ethernet
13	Maximum RF Input	10 dBm max for 10 sec
14	Antenna Switching time	50mS max
<u>Mechanical</u>		
15	Dimensions	19" x 26" x 8.75"
16	Weight	80 lb. max
17	Connectors	Type-N
18	Grounding	Chassis
19	Cooling	Internal Forced Air
<u>Environmental</u>		
20	Operating Temperature	0° C to +50° C
21	Operating Humidity	95% Non-condensing
22	Operating Altitude	Up to 10,000' Above Sea Level
23	Shock and Vibration	Normal Truck transport




Specifications subject to change without notice



5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)577-9887
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 7006
1.0 - 6.0 GHz
50-80 WATTS
BANDED POWER RF AMPLIFIER

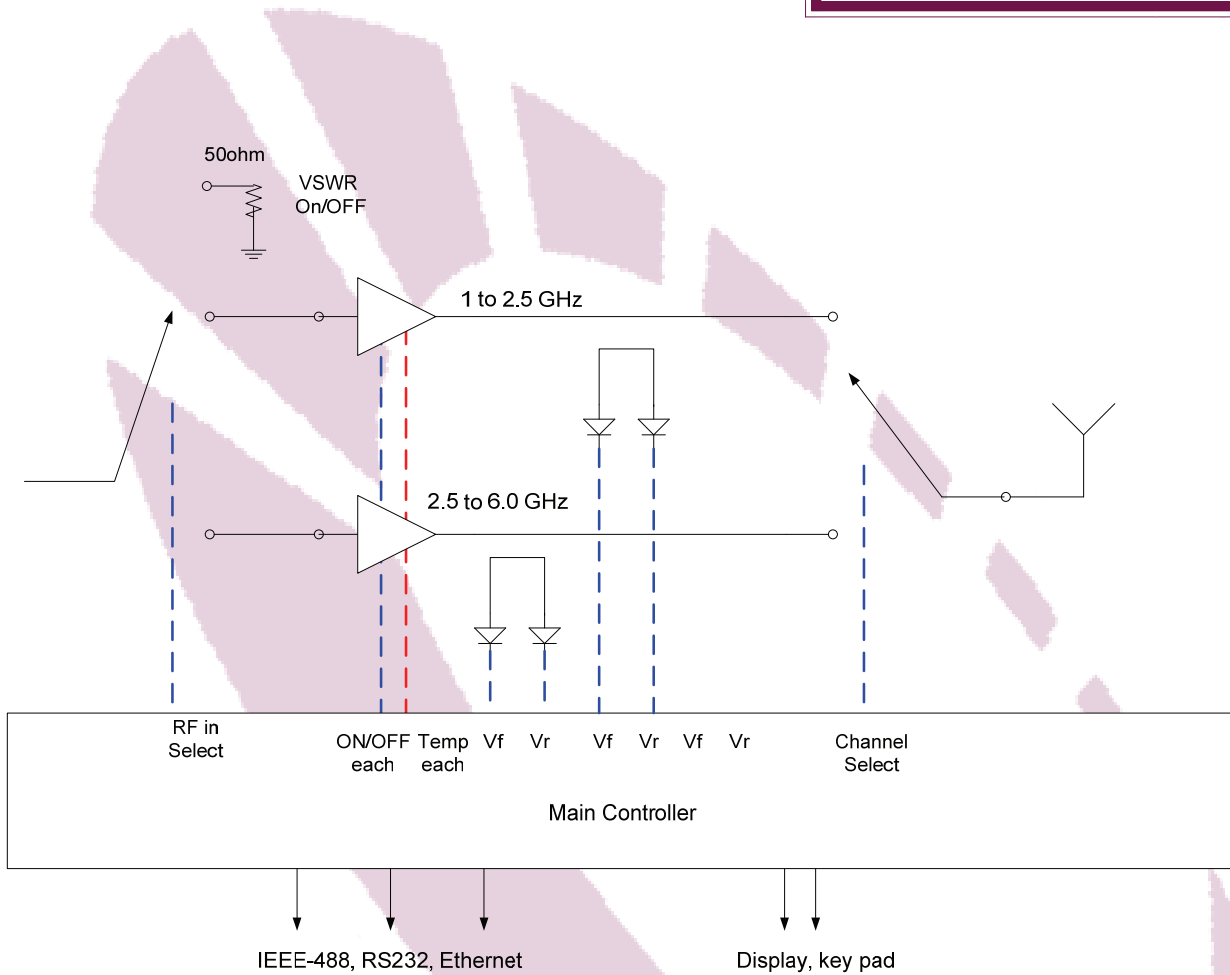

CONTROL & INDICATIONS

- ◇ AC Circuit Breaker
- ◇ Band Select
- ◇ Forward power of selected channel
- ◇ Reflected Power of selected channel
- ◇ VSWR Fault Reset

CIRCUIT PROTECTIONS

- ◇ Protection against VSWR of > 2:1 latched with Reset
- ◇ Thermal Overload
- ◇ Over Current
- ◇ Over Voltage