

PCIe SATA II 300 Card 1 channel

User Manual

Ver. 2.00

**All brand names and trademarks are properties of their
Respective owners.**

Features and Benefits

- Silicon Image SiI 3531 chipset
- Compliant with PCI Express Base Specification 1.0a
- Compliant with Serial ATA 1.0a specification with support for full complement of SATA II optional features
- PCI Express 1-lane (x1) SATA II adapter works with PCI Express slots with different lane width
- Installs in any available PCI Express slot and support data transfer rates up to 3.0Gbps (300MBps)
- Supports Native Command Queuing (NCQ), Non-zero offsets NCQ, and Out-of-order data delivery NCQ
- Independent command fetch, scatter / gather, and command execution
- Hot-swapping feature allows you to attach/detach SATA device without first powering your computer off
- Supports Windows® 2000, XP and Server 2003 and Vista

Connectors

- 1 x internal SATA connector
- 1 x external eSATA connector

System Requirements


- Windows® 2000/XP/Server 2003/Vista
- PCI Express-enabled system with an available PCI Express slot

Package Contents

- 1 x PCIe SATA II 300 Card
- 1 x Driver CD
- 1 x User Manual


Note: Contents may vary depending on country/market.

Hardware Description

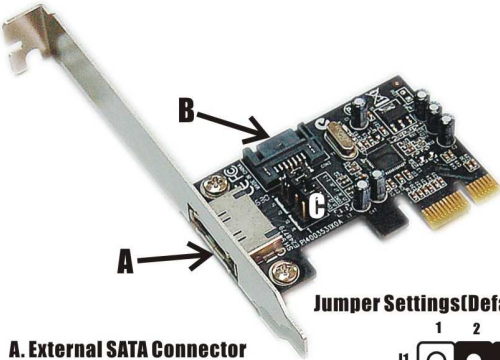

- A. External SATA Connector
- B. Internal SATA Connector
- C. Jumpers

Jumper Settings(Default Mode:2-3 close)



C (Jumper Settings)		
JP	Description	Active Port
J1-J4	1-2 close	Enable SATA Connector A
	2-3 close	Enable SATA Connector B

Note: There are two SATA ports in PCIe SATA II 300 Card. We name these ports A and B. Port A is external SATA port and B is internal SATA port. Only one of them will work but not both at the same time. Please set which port to work by jumper setting. By default, Port B is working.

Hardware Installation

1. Turn Off the power to your computer and any other connected peripheral devices.
2. Unplug the power cord from the back of the computer.
3. Remove your computer's cover.
4. Remove the slot bracket from an available PCI Express slot.
5. To install the card, carefully align the card's bus connector with the selected PCI Express slot on the motherboard. Push the board down firmly, but gently, until it is well seated.
6. Replace the slot bracket's holding screw to secure the card.

Driver Installation ***For Windows® 2000***

1. At the **Found New Hardware Wizard**, click **Next**.

2. Select **Search for a suitable driver for my device (recommended)** then click **Next**.
3. Insert the driver CD into your CD-ROM Drive, check **CD-ROM drives**, uncheck the other boxes, click **Next**, then click **Next** again.
4. Click **Next**, then click **Finish**.
5. Repeat steps 1-4.

For Windows® XP/Server 2003

1. At the **Found New Hardware Wizard**:
XP (w/SP1 or earlier) / Server 2003: Continue to step #2
XP (W/SP2 or later) / Server 2003 (w/SP1 or later): Select **No, no this time**, then click **Next**.
2. Please insert the driver CD into your CD-ROM Drive, select **Install the software automatically (Recommended)**, and click **Next**.
3. Accept the default entry, then click **Next**.
4. Click **Finish**.
5. Repeat steps 1-4.
6. Click **Yes** to restart to complete the installation.


For Windows® Vista

1. At the **Found New Hardware Wizard** window pop-up, please select **Locate and install driver software (recommended)** to start the installation.
2. Please insert the driver CD into your CD-ROM Drive.
3. Click on **Close** to complete the driver installation.

To Verify Driver Installation

Click on the “**Device Manager**” tab in System Properties, which you access from the Windows Control Panel. You should see an “**Silicon Image SiI 3531 SATA Controller**” installed under “**SCSI and RAID controllers**” item.

START > Control Panel > System > Device Manager



Hot-Plugging Hard Disk Drives

To remove a drive from a powered up system, do the following:

1. Right click **My Computer** and click **Manage**.
2. Select **Device Manager**.

3. Click **Disk Drives**, right click the target disk and select **Disable/Enable**.
4. You can now remove the target disk.