

**PRODUCT OVERVIEW**

DC Output Voltage	27.0V (DC) @ FULL LOAD
Output Amperage	25 Amps
Input Voltage Range	200V-240V AC
Input Voltage Frequency	47-63 Hz

DESCRIPTION

The **DLS-240-27-25** battery charger/power converter from IOTA Engineering converts nominal 220V A.C. voltage to 27.2V D.C. As a power supply, its tightly controlled regulation allows the user to operate any appropriate nominal D.C. load up to the converter's rated output current. As a battery charger, the **DLS-240-27-25** will maintain the battery, delivering its full-rated current when the battery capacity falls sufficiently low. The voltage is set to deliver its maximum current for the necessary period of time that minimizes undue stress to the battery caused by heating of its cells. This helps to ensure the longest possible life of the battery. Over time, as the battery nears its full capacity, the converter will float-charge the battery to prevent self-discharge of its cells.

TECHNICAL SPECIFICATIONS

DC Output Voltage (No Load) approx.	27.2V (DC)
Output Voltage Tolerance (No Load)	+ or - .7%
Output Amperage, Max Continuous	25 Amps
Output Voltage (Full Load) approx.	>27.0V (DC)
Maximum Power Output, Continuous	675 Watts
Ripple and Noise	<100 mV rms
Input Voltage Range	200 -240 VAC
Input Voltage Frequency	47-63
Maximum AC Current (@216VAC)	6.0 Amps
Typical Efficiency	>80%
Max Inrush Current, Single Cycle	30 Amps
Short Circuit Protection	Yes
Overload Protection	>100%
Line Regulation	100 mV rms
Load Regulation	<1%
Fan Control*	Proportional
Thermal Protection	YES
Working Temperature Range	0° - 40° C
Storage Temperature	-20° to 80° C
Withstand Voltage	1240V @ leads
Dimensions**	9.7" x 6.7" x 3.4"
Weight	5.0 lbs

*Proportional = Fan speed proportional to case temperature.

**See reverse side for detailed mounting specifications.

FEATURES

- Switch-mode technology
- Exceptionally clean DC output
- Tight line-load regulation
- Quickly and efficiently charges batteries
- Low and transient AC line voltage protection
- Meets F.C.C. Class A Model criteria for minimizing radio and television interference
- Lower operating temperature
- Proportional fan control circuitry
- External fuse protection
- Charging Jack allows for normal and high-stage charging
- Compatible with IOTA IQ4 Smart Charger for automatic four-stage charging



P.O. BOX 11846 TUCSON, AZ 85734
(520) 294-3292 • FAX (520) 741-2837

www.iotaengineering.com

DLS-240-27-25

BATTERY CHARGER/POWER CONVERTER

OPTIONS


MODELS

- DLS-240-27-25
- DLS-240-27-25/IQ4 (with integrated IQ4 Smart Charger)

DUAL VOLTAGE JACK

The **DLS-240-27-25** is equipped with a Dual Voltage Jack and Dual Voltage Plug that allows manual switching from a long-term float voltage of 27.2vdc to 29.6vdc. When the Dual Voltage Plug is inserted in the jack, the voltage increases to 29.6vdc for occasional fast charging. When the plug is removed, the voltage drops to 27.2vdc to reduce battery water loss.


The Dual Voltage Jack also allows for easy installation of an external IQ4 Smart Charger for automatic 4-stage charging (optional). If the unit is equipped with an internal IQ4 smart charger, two-step charging is not needed and the Dual Voltage Jack is disabled. For details on 4-stage charging, refer to the IQ4 instruction manual.

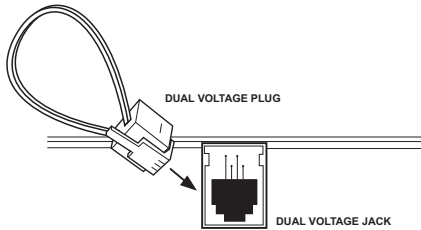

INSTALLATION OVERVIEW

Disconnect the positive side of the battery before installation. Connect the positive (red) and negative (black) terminal lugs to battery or load. Always use the proper size wire based on the amperage of the converter and the battery. When connecting to a battery, a breaker should be installed within 18" of the battery, connecting the battery positive to the line side of the breaker, and the DLS to the load side. Connect "Chassis Bonding Lug" on the DLS to vehicle chassis or other grounding source.

The **DLS-240-27-25** is equipped with a three-prong A.C. input cord for connection to the 240VAC power source. The cord is rated 250VAC, and is 3 feet long from the input side of the unit. See chart for maximum current draw and required input voltages. For complete installation guidelines, refer to the installation manual.

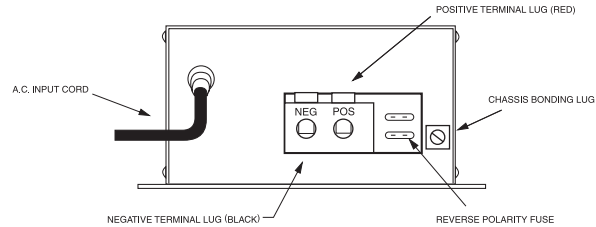

WARRANTY

The DLS Series Battery Charger/Power Converter is warranted from defects in materials or workmanship for two years from date of retail purchase, and limits the remedies to repair or replacement. This warranty is valid only in the continental United States and Canada. For complete warranty details, contact Customer Service or visit www.iotaengineering.com.

MOUNTING FOOTPRINT

