



47MHz to 870MHz Analog CATV Transimpedance Amplifier

MAX3654

General Description

The MAX3654 analog transimpedance amplifier (TIA) is designed for CATV applications in fiber-to-the-home (FTTH) networks. This high-linearity amplifier is intended for 47MHz to 870MHz subcarrier multiplexed (SCM) signals in passive optical networks (PON). A gain-control input supports AGC operation with optical inputs having -6dBm to +2dBm average power. With 62dBΩ maximum gain at 47MHz and 18dB gain control range, the minimum RF output level is 14dBmV/channel at -6dBm optical input. A compact 4mm x 4mm package includes all of the active RF circuitry required to convert analog PIN photocurrent to a 75Ω CATV output.

This 700mW SiGe RF IC provides a low-cost, low-power integrated analog CATV receiver solution for FTTH ONTs.

Features

- ◆ 47MHz to 870MHz Operation
- ◆ -6dBm to +2dBm Optical Input Range
- ◆ 21dBm OIP3, 47dBm OIP2
- ◆ 5.5pA/√Hz EIN (Amplifier Alone)
- ◆ 62dB Gain at 47MHz
- ◆ 18dB Transimpedance (Gain) Control
- ◆ Integrated +4dB Gain Tilt (with Typical Photodiode)
- ◆ +5V Single-Supply Operation
- ◆ 700mW Power Dissipation
- ◆ -40°C to +85°C Operating Temperature Range
- ◆ 4mm x 4mm TQFN Package

Applications

FTTH Optical Network Termination (ONT)

Ordering Information


PART	TEMP RANGE	PIN-PACKAGE	PKG-CODE
MAX3654ETE+	-40°C to +85°C	16 TQFN-EP*	T1644F-4-A

+ Denotes lead-free package.

*EP = Exposed pad.

Pin Configuration appears at end of data sheet.

Typical Application Circuit

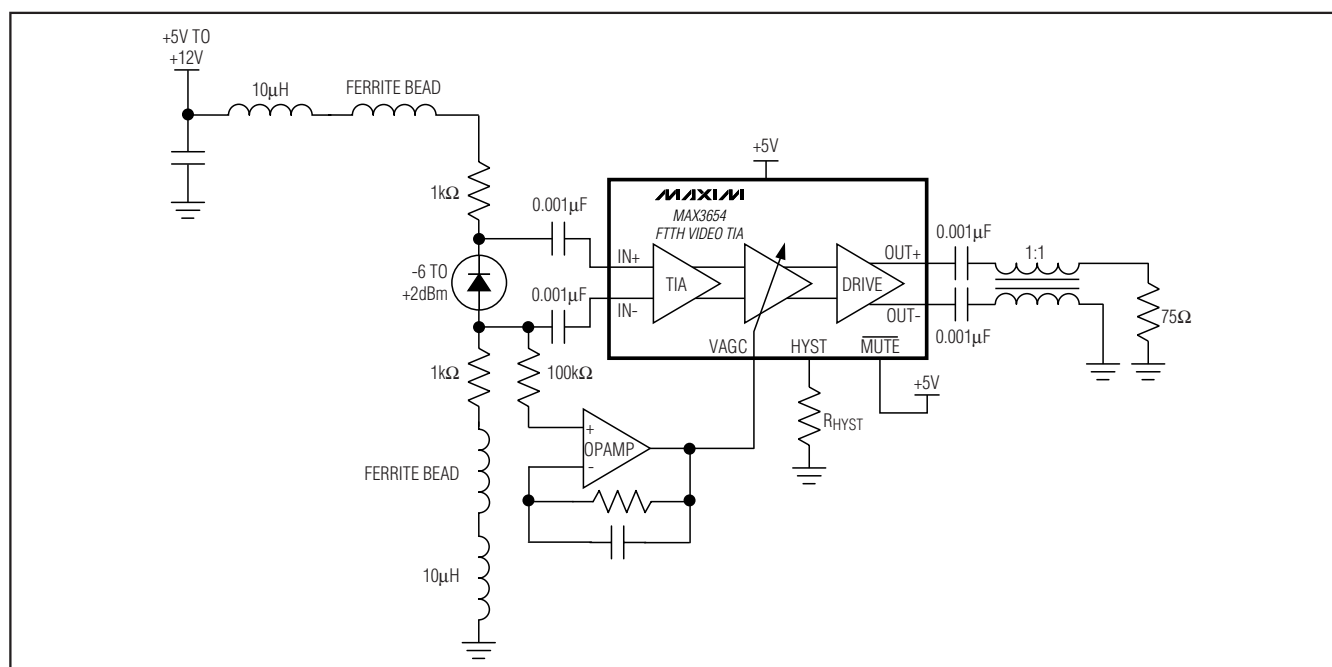

47MHz to 870MHz Analog CATV Transimpedance Amplifier

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, VCC -0.3V to +6.0V
 IN+, IN-, VAGC, OUT+, OUT-, MUTE, HYST -0.3V to +5.5V
 TEST1, TEST2 -0.3V to +5.5V
 Output Current (OUT+, OUT-) 56mA

Continuous Power Dissipation, 16-Lead TQFN-EP Package
 (T_A = +70°C) (derate 16.9mW/°C above +70°C) 1349.1mW
 Operating Temperature Range -40°C to +85°C
 Storage Temperature Range -55°C to +150°C
 Lead Temperature (soldering, 10s) +300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

DC ELECTRICAL CHARACTERISTICS

(V_{CC} = +4.75V to +5.25V, typical values at V_{CC} = +5.0V, T_A = +25°C, unless otherwise noted.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Current	I _{CC}			136	170	mA
Gain Control Input Current		V _{AGC} = 1.4V		50	200	μA
Mute Input High	V _{IH}		2.0			V
Mute Input Low	V _{IL}				0.8	V
Mute Input Current	I _{IL} , I _{IH}				30	μA

AC ELECTRICAL CHARACTERISTICS

(V_{CC} = +4.75V to +5.25V, output Z_L = 75Ω, typical values at V_{CC} = +5.0V, T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Operating Frequency Range	f		47		870	MHz
Frequency Response Flatness		47MHz to 870MHz (Notes 2, 6)		±0.3	±0.75	dB
Transimpedance, Differential (Z _T)		47MHz	V _{AGC} ≤ 0.175V	60.5	62	63.5
			V _{AGC} = 0.500V	51.5	53	54.5
			V _{AGC} = 1.400V	42	43.5	45
Gain Control Stability		V _{AGC} = 0 to 1.4V, R _{HYST} = open (Note 3)		±0.75	±1.6	dB
Gain Tilt		Linear, 870MHz compared to 47MHz (Notes 4, 6)	3	4	5.5	dB
Output Second-Order Intercept	OIP2	(Note 5)		>47		dBm
Output Third-Order Intercept	OIP3	(Notes 4, 5)	18	21		dBm
Equivalent Input Noise Including Photodiode	EIN	V _{AGC} ≤ 0.175V (Notes 4, 6)			8	pA/√Hz
Gain Hysteresis, Optical		R _{HYST} = open		±0.13		dB
		R _{HYST} = GND		±0.65		
Differential Output Level, Mute		MUTE ≤ 0.8V, 50MHz		-58	-45	dBc
RF Output Return Loss	-S22	47MHz to 870MHz		13		dB

Note 1: DC parameters are tested at +25°C, and guaranteed by design and characterization at -40°C and +85°C.

Note 2: Maximum difference between frequency response at any point and a straight line connecting frequency response at end points.

Note 3: Gain control stability is the maximum variation in transimpedance (over process, voltage, and temperature) for any V_{AGC} control voltage.

Note 4: AC parameters guaranteed by design and characterization.

Note 5: OIP2 and OIP3 measured using two tones at f₁ = 800MHz and f₂ = 850MHz, P_{OUT} = -16dBm, V_{AGC} = 1.4V.

Note 6: Includes the effects of a packaged photodiode having the characteristics shown in Figure 2.

47MHz to 870MHz Analog CATV Transimpedance Amplifier

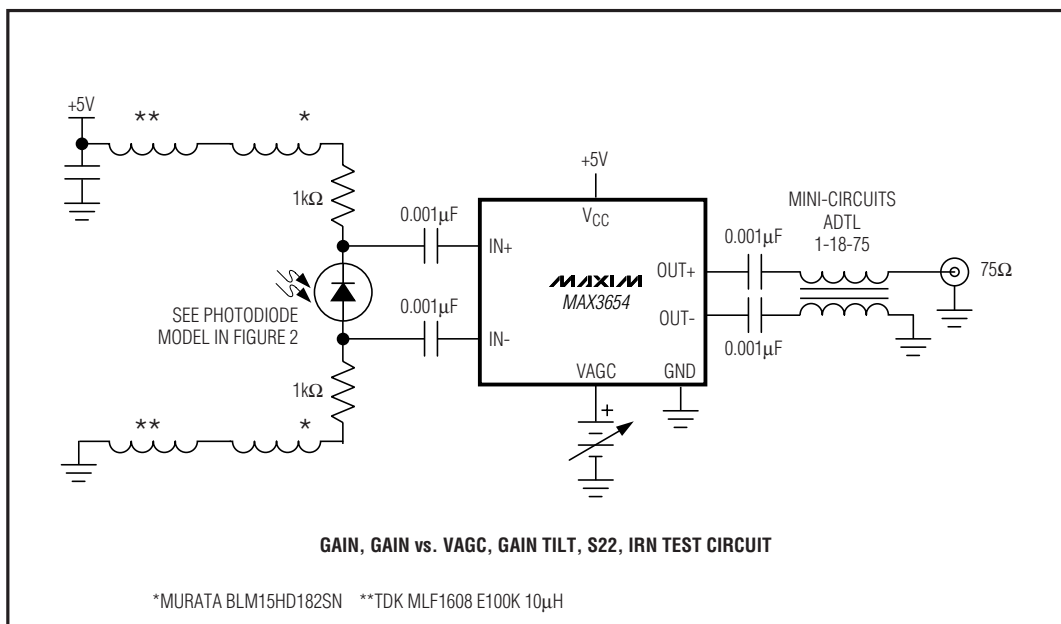
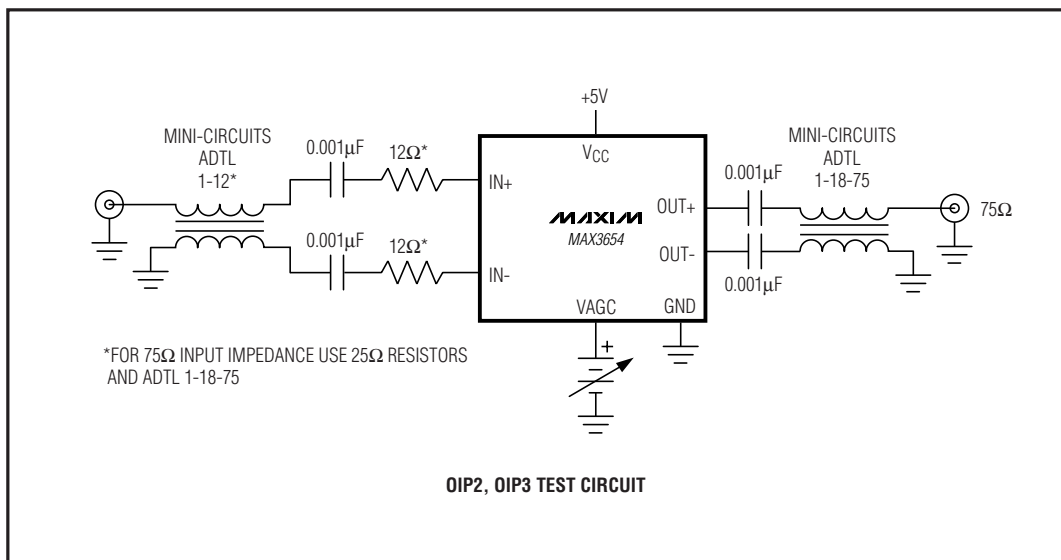


Figure 1. Test Circuits for Characterization

47MHz to 870MHz Analog CATV Transimpedance Amplifier

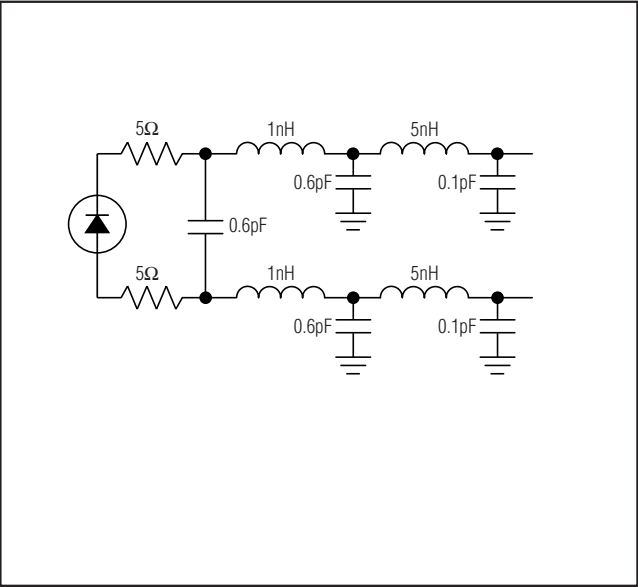


Figure 2. Photodiode and Header Model




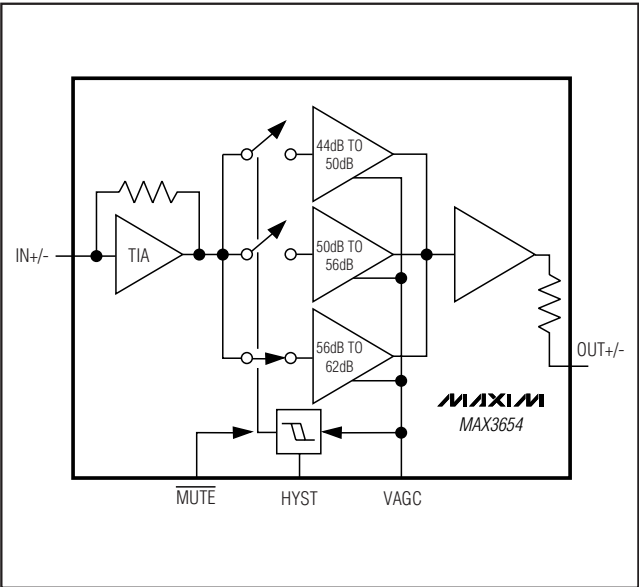


Figure 3. Functional Diagram

Typical Operating Characteristics

($V_{CC} = +5.0V$, $T_A = +25^\circ C$, unless otherwise noted.)

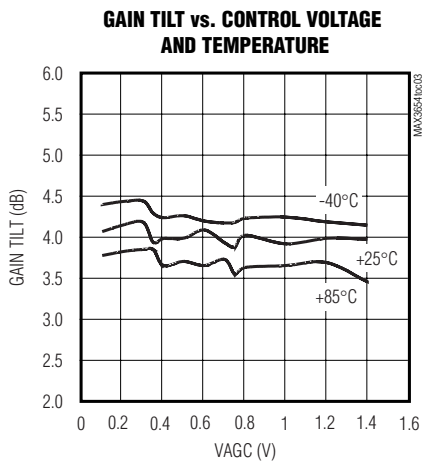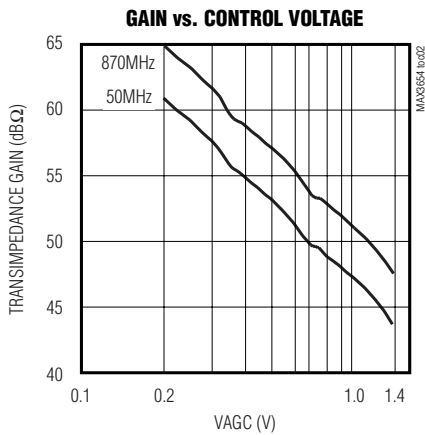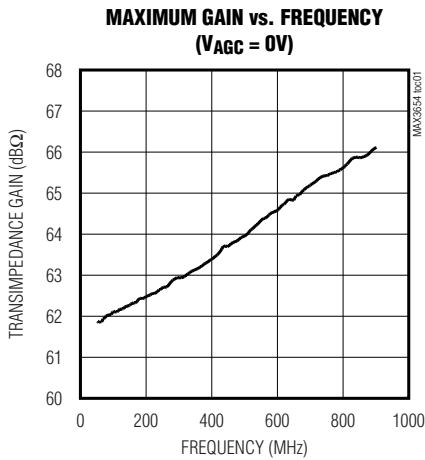


47MHz to 870MHz Analog CATV Transimpedance Amplifier


Typical Operating Characteristics (continued)

($V_{CC} = +5.0V$, $T_A = +25^\circ C$, unless otherwise noted.)


GAIN TILT DEVIATION vs. FREQUENCY
(REFERRED TO A LINE FROM 50MHz TO 870MHz)

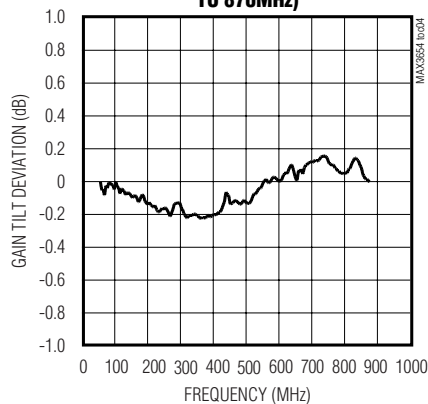


DIFFERENTIAL S22
(NORMALIZED TO 75Ω)

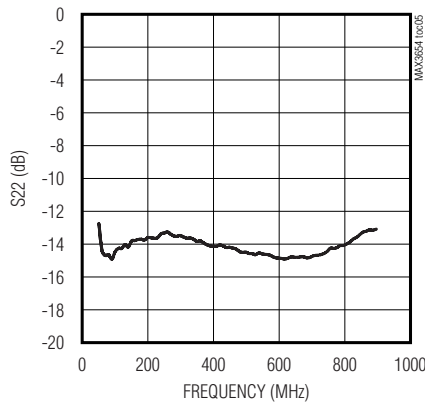


INPUT REFERRED NOISE vs. FREQUENCY
(MAXIMUM GAIN, VGA = 0V)

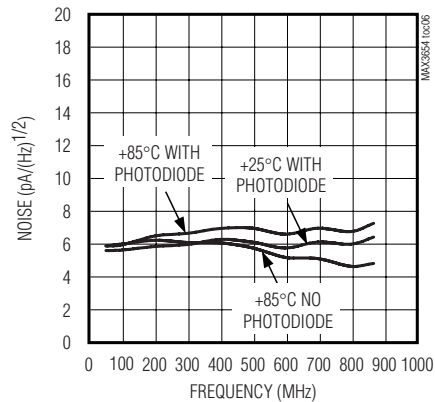

OIP3 vs. CONTROL VOLTAGE

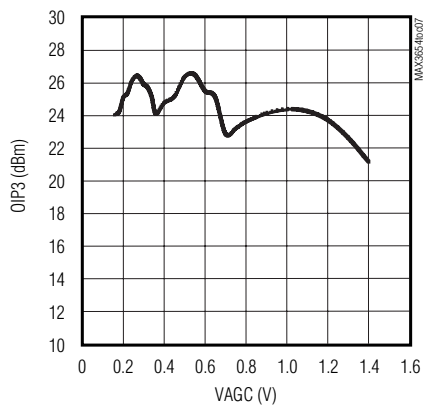

OIP2 vs. CONTROL VOLTAGE

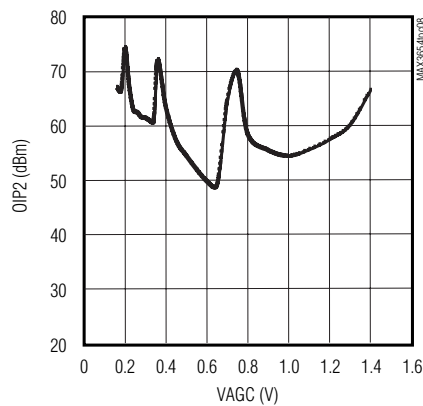

47MHz to 870MHz Analog CATV Transimpedance Amplifier

Pin Description

PIN	NAME	FUNCTION
1, 4, 9, 12	VCC	+5.0V Power Supply
2	IN+	Positive Analog Photodiode Input Connection. Typically connected to photodiode cathode.
3	IN-	Negative Analog Photodiode Input Connection. Typically connected to photodiode anode.
5	VAGC	AGC Control Input. Range is 0 to 1.4V. See the <i>Typical Operating Characteristics</i> Gain vs. Control Voltage graph.
6	MUTE	Mute Control Input, TTL. MUTE < 0.8V to mute output.
7	HYST	AGC Hysteresis Control Input. A resistor from HYST to GND controls the hysteresis level.
8, 14, 16	GND	Ground
10	OUT-	Negative RF Output. The voltage on this pin decreases with increasing optical power when IN+ is connected to the photodiode cathode.
11	OUT+	Positive RF Output. The voltage on this pin increases with increasing optical power when IN- is connected to the photodiode anode.
13	TEST1	Reserved for Test. Connect to GND for normal operation.
15	TEST2	Reserved for Test. Connect to GND for normal operation.
EP	EP	Exposed Pad. The exposed pad must be soldered to the circuit-board ground for proper thermal and electrical performance.

Detailed Description

The MAX3654 is a broadband, high-linearity, low-noise transimpedance amplifier. The transimpedance (gain) can be adjusted between 43.5dBΩ and 62dBΩ using the voltage at an external control input (VAGC). When connected as shown in the *Typical Application Circuit*, optical input levels from -6dBm to +2dBm will produce a minimum output of 14dBmV/channel, and 4dB tilt compensation. Gain deviation over frequency from 47MHz to 870MHz is less than ±0.75dB.

Low-Noise Variable Gain Amplifier

The input stage is a low-noise analog transimpedance amplifier (TIA) connected differentially to the analog photodiode. Desired performance can be achieved with a photodiode having capacitance (C_{PD}) up to 1pF.

VAGC and Hysteresis Control

The gain-control pin VAGC sets overall TIA gain implemented as three switchable gain stages, each with a continuously variable gain control, as shown in Figure 3.

This produces a continuously variable gain ranging from 62dBΩ (at VAGC = 0.175V) to 43.5dBΩ at (VAGC=1.4V). A set of comparators examines the

VAGC input to select a gain stage. As the voltage at VAGC crosses the two locations in the gain vs. VAGC curve, where the gain stage changes (350mV and 700mV), there will be small deviations in the output which may lead to a brief interruption of CATV signals. See the *Typical Operating Characteristics* for Gain vs. Control Voltage.

A hysteresis control input is provided to limit dithering when the optical level is close to a gain-switching point. The hysteresis level is controlled by the value of R_{HYST}. Hysteresis is minimum (0.13dB) when this pin is open.

RF Output and Cable Tilt Compensation

With a typical photodiode, the gain at 870MHz is 4dB higher than at 47MHz. The overall frequency response of the TIA is within ±0.75dB of a straight line connecting the values at 47MHz and 870MHz.

Mute

In normal operation, the TTL MUTE pin is held high. When MUTE is low, the output signal is attenuated by more than 45dB.

47MHz to 870MHz Analog CATV Transimpedance Amplifier

Applications Information

Photodiode Parasitics

The MAX3654 TIA is designed to operate with a low-capacitance analog photodiode. Proper system design includes considerations of lead configuration, pad, and through-hole geometry, and PC board layer selection for connections to the IC. The TIA is designed to operate correctly when the total capacitance of the photodiode, package, leads and PC board is between 1.0pF and 2.5pF.

RF Output

The differential TIA RF output should be connected (AC-coupled) to a balun transformer for normal single-ended output.

AGC Operation

For AGC operation, the optical average power can be measured from the voltage drop across the lower bias resistor, using high impedance to isolate the photodiode as shown in the EV kit schematic. TIA gain is inversely proportional to the voltage present at VAGC from 0.175V to 1.4V. From 0 to 0.175V, the gain is constant and maximum. The nominal gain is given by:

$$ZT(\text{dB}\Omega) = 62\text{dB}\Omega + 20 \times \log \left[\frac{175\text{mV}}{\text{VAGC}(\text{mV})} \right]$$

$$(0.175\text{V} \leq \text{VAGC} \leq 1.4\text{V}).$$

When connected as shown in the *Typical Applications Circuit*, the MAX3654 will maintain the electrical output constant (15dBmV/ch) for optical signals in the -6dBm to +2dBm range.

Evaluation Kit and PC Board Layout

The factory-assembled EV kit for the MAX3654 provides two versions: optical input and electrical input.

The optical input circuit includes photodiode bias circuitry, an op amp to adjust VAGC according to the DC photodiode current (for AGC operation), an output balun, and a 75 Ω output connector. Through-hole pads are provided to attach the triplexer analog photodiode leads. Since photodiode capacitance and package lead inductance affect the amount of uptilt, in configurations where lead inductance is significantly lower than the value shown in Figure 2, the uptilt may be increased by providing discrete inductance on the PC board. When a $C_{PD} = 0.5\text{pF}$ (typ) photodiode is mount-

ed with 5mm (nominal) leads into through-hole vias as in the EV kit configuration, a 4dB uptilt will normally be achieved. It is important to configure the layout with capacitance and inductance in the anode and cathode connection as symmetric as possible.

The electrical input circuit is normally configured with a 50 Ω input for use with conventional test and measurement equipment. If desired, the MAX3654 input can also be terminated with 75 Ω as shown in the EV kit data sheet. The 75 Ω EV kit outputs should be connected to 50 Ω test and measurement equipment using a minimum loss pad.

For more information, see the Maxim website:


MAX3654 EV Kit data sheet—

<http://www.maxim-ic.com/Fiber.cfm>

Minimum Loss Pad—

http://www.maxim-ic.com/appnotes.cfm/appnote_number/972

Pin Configuration

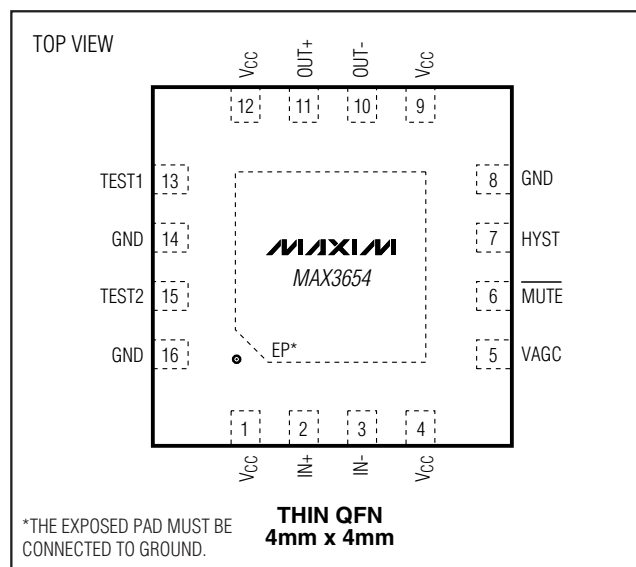

Chip Information

TRANSISTOR COUNT: 3376


PROCESS: SiGe Bipolar

SUBSTRATE: SOI

47MHz to 870MHz Analog CATV Transimpedance Amplifier

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.) For the latest package outline information, go to www.maxim-ic.com/packages.) (TQFN 4mm x 4mm x 0.8mm, Package Code: T1644.)

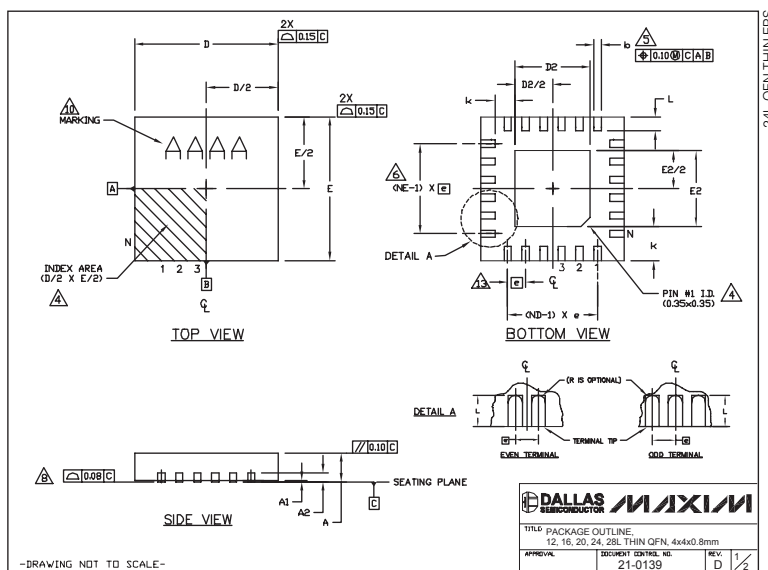

COMMON DIMENSIONS																	EXPOSED PAD VARIATIONS																	
PKG	12L 4x4				16L 4x4				20L 4x4				24L 4x4				28L 4x4				PKG CODES	D2				E2				BROWN MARKS				
	MIN	NOM	NOM	MAX	MIN	NOM	NOM	MAX	MIN	NOM	NOM	MAX	MIN	NOM	NOM	MAX	MIN	NOM	NOM	MAX		MIN	NOM	NOM	MAX	MIN	NOM	NOM	MAX					
A	0.75	0.75	0.80	0.85	0.75	0.80	0.85	0.90	0.75	0.80	0.85	0.90	0.75	0.80	0.85	0.90	0.75	0.80	0.85	0.90	T1644-2	1.95	2.10	2.25	1.95	2.10	2.25	2.40	2.25	2.10	2.25	2.40	2.25	YES
AI	0.0	0.0	0.05	0.10	0.0	0.05	0.10	0.15	0.0	0.05	0.10	0.15	0.0	0.05	0.10	0.15	0.0	0.05	0.10	0.15	T1644-3	1.95	2.10	2.25	1.95	2.10	2.25	2.40	2.25	2.10	2.25	2.40	2.25	YES
AE	0.0	0.0	0.05	0.10	0.0	0.05	0.10	0.15	0.0	0.05	0.10	0.15	0.0	0.05	0.10	0.15	0.0	0.05	0.10	0.15	T1644-4	1.95	2.10	2.25	1.95	2.10	2.25	2.40	2.25	2.10	2.25	2.40	2.25	YES
B	0.25	0.30	0.35	0.40	0.25	0.30	0.35	0.40	0.25	0.30	0.35	0.40	0.25	0.30	0.35	0.40	0.25	0.30	0.35	0.40	T1644-5	1.95	2.10	2.25	1.95	2.10	2.25	2.40	2.25	2.10	2.25	2.40	2.25	YES
B	0.30	0.40	0.40	0.50	0.30	0.40	0.40	0.50	0.30	0.40	0.40	0.50	0.30	0.40	0.40	0.50	0.30	0.40	0.40	0.50	T1644-6	1.95	2.10	2.25	1.95	2.10	2.25	2.40	2.25	2.10	2.25	2.40	2.25	YES
E	0.30	0.40	0.40	0.50	0.30	0.40	0.40	0.50	0.30	0.40	0.40	0.50	0.30	0.40	0.40	0.50	0.30	0.40	0.40	0.50	T1644-7	1.95	2.10	2.25	1.95	2.10	2.25	2.40	2.25	2.10	2.25	2.40	2.25	YES
e	0.00	0.00	0.05	0.10	0.00	0.00	0.05	0.10	0.00	0.00	0.05	0.10	0.00	0.00	0.05	0.10	0.00	0.00	0.05	0.10	T1644-8	1.95	2.10	2.25	1.95	2.10	2.25	2.40	2.25	2.10	2.25	2.40	2.25	YES
K	0.25	-	-	0.25	-	-	0.25	-	-	0.25	-	-	0.25	-	-	0.25	-	-	-	-	T1644-9	1.95	2.10	2.25	1.95	2.10	2.25	2.40	2.25	2.10	2.25	2.40	2.25	YES
L	0.45	0.55	0.65	0.65	0.45	0.55	0.65	0.65	0.45	0.55	0.65	0.65	0.45	0.55	0.65	0.65	0.45	0.55	0.65	0.65	T1644-10	1.95	2.10	2.25	1.95	2.10	2.25	2.40	2.25	2.10	2.25	2.40	2.25	YES
N	12	16	20	24	16	20	24	28	20	24	28	32	24	28	32	36	28	32	36	40	T1444-1	2.45	2.60	2.75	2.45	2.60	2.75	2.90	2.60	2.60	2.75	2.90	2.60	YES
ND	3	4	5	6	4	5	6	7	5	6	7	8	6	7	8	9	7	8	9	10	T1444-2	2.45	2.60	2.75	2.45	2.60	2.75	2.90	2.60	2.60	2.75	2.90	2.60	YES
NE	3	4	5	6	4	5	6	7	5	6	7	8	6	7	8	9	7	8	9	10	T1444-3	2.45	2.60	2.75	2.45	2.60	2.75	2.90	2.60	2.60	2.75	2.90	2.60	YES
WGGC WGGD	VGGC				VGGC				WGGD-1				WGGD-2				WGGE																	
WGGF																																		
WGGG																																		
WGGH																																		
WGGI																																		
WGGJ																																		
WGGK																																		
WGGM																																		
WGGN																																		
WGGP																																		
WGGQ																																		
WGGR																																		
WGGS																																		
WGGT																																		
WGGU																																		
WGGV																																		
WGGW																																		
WGGX																																		
WGGY																																		
WGGZ																																		
WGGAA																																		
WGGAB																																		
WGGAC																																		
WGGAD																																		
WGGAE																																		
WGGAF																																		
WGGAG																																		
WGGAH																																		
WGGAI																																		
WGGAJ																																		
WGGAK																																		
WGGAL																																		
WGGAM																																		
WGGAN																																		
WGGAO																																		
WGGAP																																		
WGGAQ																																		
WGGAR																																		
WGGAS																																		
WGGAT																																		
WGGAU																																		
WGGAV																																		
WGGAW																																		
WGGAX																																		
WGGAY																																		
WGGAZ																																		
WGGBA																																		
WGGBB																																		
WGGBC																																		
WGGBD																																		
WGGBE																																		
WGGBF																																		
WGGBG																																		
WGGBH																																		
WGGBI																																		
WGGBJ																																		
WGGBK																																		
WGGBL																																		
WGGBM																																		
WGGBN																																		
WGGBO																																		
WGGBP																																		
WGGBQ																																		
WGGBR																																		
WGGBS																																		
WGGBT																																		
WGGBU																																		
WGGBV																																		
WGGBW																																		
WGGBX																																		
WGGBY																																		
WGGBZ																																		
WGGCA																																		
WGGCB																																		
WGGCC																																		
WGGCD																																		
WGGCE																																		
WGGCF																																		
WGGCG																																		
WGGCH																																		
WGGCI																																		
WGGCJ																																		
WGGCK																																		
WGGCL																																		
WGGCM																																		
WGGCN																																		
WGGCO																																		
WGGCP																																		
WGGCQ																																		
WGGCR																																		
WGGCS																																		
WGGCT																																		
WGGCU																																		
WGGCV																																		
WGGCW																																		
WGGCX																																		
WGGCY																																		
WGGCZ																																		
WGGDA																																		
WGGDB																																		
WGGDC																																		
WGGDD																																		
WGGDE																																		
WGGDF																																		
WGGDG																																		
WGGDH																																		
WGGDI																																		
WGGDJ																																		
WGGDK																																		
WGGDL																																		
WGGDM																																		
WGGDN																																		
WGGDO																																		
WGGDP																																		
WGGDQ																																		
WGGDR																																		
WGGDS																																		
WGGDT																																		
WGGDU																																		
WGGDV																																		
WGGDW																																		
WGGDX																																		
WGGDY																																		
WGGDZ																																		
WGGEA																																		

NOTES:

1. DIMENSIONING & TOLERANCING CONFORM TO ASME Y14.5M-1994.
2. ALL DIMENSIONS ARE IN MILLIMETERS. ANGLES ARE IN DEGREES.
3. N IS THE TOTAL NUMBER OF TERMINALS.
4. THE TERMINAL #1 IDENTIFIER AND TERMINAL NUMBERING CONVENTION SHALL CONFORM TO JEDEC J-55-012. DETAILS OF TERMINAL #1 IDENTIFIER ARE OPTIONAL, BUT MUST BE LOCATED WITHIN THE INDICATED AREA. THE TERMINAL #1 IDENTIFIER MAY BE EITHER A HOLE OR MARKED FEATURE.
5. DIMENSION B APPLIES TO METALLIZED TERMINALS AND IS MEASURED BETWEEN 0.25 mm AND 0.30 mm FROM TERMINAL TP.
6. NO AND NE REFER TO THE NUMBER OF TERMINALS ON EACH D AND E SIDE RESPECTIVELY.
7. DEPOLARIZATION IS POSSIBLE IN A SYMMETRICAL FASHION.
8. COPOLARIZATION APPLIES TO THE EXPOSED HEAT SHINK SOLDER AS WELL AS THE TERMINALS.
9. COPOLARIZATION CONFORMS TO JEDEC J-55-012, 12444-1, 12444-3, 12444-4 AND 12484-1.
10. MARKING IS FOR PACKAGE ORIENTATION REFERENCE ONLY.
11. COPOLARIZATION SHALL NOT EXCEED 0.08mm.
12. WARPAGE SHALL NOT EXCEED 0.10mm.
13. LEAD CENTERLINES TO BE AT TRUE POSITION AS DEFINED BY BASIC DIMENSION "a", ± 0.05 .



Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.