

# Oak Dist

## Infrared Distance Measuring Sensor

# Datasheet



### Revision history

Date	Doc. Rev.	Changes
19-Jul-2012	Rev. 1.6	The technical specification has changed
30-Mar-2012	Rev. 1.5	New Sensor GP2Y0A60SZ0F
21-Jun-2011	Rev. 1.4	Disclaimer Update
14-Jan-2011	Rev. 1.3	Modified sample rate range and resolution
29-Oct-2010	Rev. 1.2	Added Operating Temperature Range
30-Sep-2010	Rev. 1.1	Added USB Vendor ID and Product ID
28-Feb-2008	Rev. 1.0	Minor Edits (section 1.1)
26-June-2007	Rev. 0.9	Preliminary Release



## Contents

<b>1.</b>	<b>Introduction.....</b>	<b>3</b>
1.1	Reference Documents .....	3
<b>2.</b>	<b>Hardware Specifications.....</b>	<b>4</b>
2.1	Sensor: Sharp GP2Y0A60SZ0F .....	4
2.2	Measurement Range.....	4
2.3	Supported Sensor Features .....	4
2.4	USB Interface.....	4
2.5	Pitfalls .....	5
2.6	Operating Temperature Range .....	5
<b>3.</b>	<b>Software Specifications .....</b>	<b>6</b>
3.1	INTERRUPT IN Report Contents (Real time data) .....	6
3.2	FEATURE Report Commands.....	6
<b>4.</b>	<b>Technical Specifications .....</b>	<b>9</b>
4.1	Current Consumption .....	9
4.2	Mechanical Dimensions.....	9
4.3	RoHS Compliance.....	9
4.4	Pin Assignment USB Connector .....	9



# 1. Introduction

---

The Oak Dist is a USB attached distance measuring sensor. It uses infrared triangulation technology to measure the distance to any surface with a minimum reflectivity.

The Oak Dist can be integrated in a custom application very easily. The operating power as well as real time sensor data and uncritical sensor configuration data are all transferred through a simple USB cable. The very low power consumption, including automatic entering into sleep mode, allows using the device not only in fixed installations, but also in mobile applications.

## 1.1 Reference Documents

Distance Sensor Datasheet:

[http://files.toradex.com/Oak/Datasheets/Components/Oak\\_Distance/Sharp\\_GP2Y0A60SZ0F.pdf](http://files.toradex.com/Oak/Datasheets/Components/Oak_Distance/Sharp_GP2Y0A60SZ0F.pdf)

Programming Guide for the Oak Sensor Family:

[http://files.toradex.com/Oak/Oak\\_ProgrammingGuide.pdf](http://files.toradex.com/Oak/Oak_ProgrammingGuide.pdf)

Oak Programming Tutorial for Windows:

<http://developer.toradex.com/software-resources/usb-sensors-and-peripherals/oak-programming-tutorial-for-windows>



## 2. Hardware Specifications

---

### 2.1 Sensor: Sharp GP2Y0A60SZ0F

The GP2Y0A60SZ0F is an infrared reflection type sensor to measure distances in the range of 0.10m – 0.60m. Its robust design makes it ideally suited for robotics applications.

The GP2Y0A60SZ0F consists of an infrared LED united with a position sensitive device (PSD) and analog signal processing circuitry.

### 2.2 Measurement Range

Sensor data are provided in linearized form, representing the output characteristics diagram from the datasheet:

Distance      0.10 – 0.60 m (see chapter 2.5)

Resolution:   0.001 m

Resolution depends greatly on the alignment of the sensor relative to the target.

For more details, please refer to the sensor datasheet (link in chapter 1.1)

### 2.3 Supported Sensor Features

Read distance

### 2.4 USB Interface

Interface:      USB 2.0 Full Speed (12Mbits/s)

Connector:     Standard USB Mini-B

Device Class:   HID

Vendor ID:      0x1B67

Product ID:     0x0005

Sampling Rate: 3ms to 65s, user adjustable

Report Rate:    1 ms to 65s, user adjustable



## 2.5 Pitfalls

Sensor accuracy might be affected by the following parameters:

- Sensor misalignment (infrared beam opening is only 2°)
- Ambient temperature
- Bright light source shining onto the reflecting surface
- Reflectivity of the surface
- Ambient light of fluorescent, LED's etc.

Please consider that the output of the distance sensor is not specified below 0.10m (see Datasheet "Sharp\_GP2Y0A60SZ0F.pdf" page 8). Our experience is that the sensor can produce any value in the range from 0 to 0.1m.

The Oak Dist measures distances up to ~1m. For distances longer than 50cm, environmental factors (see above) impact the distance measurement much more than the properties of the distance sensor.

For distances above 60cm the sensor becomes inaccurate. The measured values should be used only to decide whether an object is getting closer or farther away of the sensor.

## 2.6 Operating Temperature Range

Minimum Operating Temperature: -10°C

Maximum Operating Temperature: +60°C



### 3. Software Specifications

---

All Oak Sensors are implemented as HID devices. Thus driver support is built into all major operating systems.

Captured sensor data is transmitted through an INTERRUPT IN reports. Therefore real time processing can be guaranteed. This data can be received by the host using regular file read operations. Chapter 3.1 describes the contents of this report.

On an independent communication channel, sensor configuration is done using FEATURE reports that are 32 Bytes in length. Special operating system calls exist to transmit / receive feature reports. Chapter 0 shows the structure of a feature report for each supported command.

Please refer also to the document “Programming Guide to the Oak Sensor Family” for more details.

#### 3.1 INTERRUPT IN Report Contents (Real time data)

16 Bit	Frame Number (Time stamp)	10 <sup>-3</sup> s
16 Bit	Distance	10 <sup>-4</sup> m

#### 3.2 FEATURE Report Commands

##### 3.2.1 Report Mode

Byte#	0	1	2	3	4	5
Content	GnS	Tgt	0x01	0x00	0x00	RPTMODE

GnS: 0 = Set  
1 = Get

Tgt 0 = RAM  
1 = Flash

RPTMODE: 0 = After Sampling (Factory Default)  
1 = After Change  
2 = Fixed Rate

##### 3.2.2 LED Mode

Byte#	0	1	2	3	4	5
Content	GnS	Tgt	0x01	0x01	0x00	LEDMODE

GnS: 0 = Set  
1 = Get

Tgt 0 = RAM  
1 = Flash



## Oak Dist Datasheet

LEDMODE:     0 = Off (Factory Default)  
               1 = On  
               2 = Blink Slowly  
               3 = Blink Fast  
               4 = Blink 4 pulses

### 3.2.3 Report Rate

Number of milliseconds between two IN reports. This parameter will only be regarded if Report Mode = 2 (fixed rate)

Byte#	0	1	2	3	4	5	6
Content	GnS	Tgt	0x02	0x00	0x00	RptRate LSB	RptRate MSB

GnS:           0 = Set  
               1 = Get

Tgt            0 = RAM  
               1 = Flash

RptRate:       Report Rate [ms]

### 3.2.4 Sample Rate

This is the actual sample rate the sensor is working on. If Report Mode = 0 (After Sampling) this is also the rate at which the device reports values to the host PC.

Byte#	0	1	2	3	4	5	6
Content	GnS	Tgt	0x02	0x01	0x00	SampRate LSB	SampRate MSB

GnS:           0 = Set  
               1 = Get

Tgt            0 = RAM  
               1 = Flash

SampRate:      Sample Rate [ms]

### 3.2.5 User Device Name

Byte#	0	1	2	3	4	5-25
Content	GnS	Tgt	0x15	0x00	0x00	UsrDevName

GnS:           0 = Set  
               1 = Get

Tgt            0 = RAM  
               1 = Flash

UsrDevName:   User defined name for the whole device  
                   Null-terminated string, max. 20+1 characters



## Oak Dist Datasheet

### 3.2.6 User Channel Name

Byte#	0	1	2	3	4	5-25
Content	GnS	Tgt	0x15	ChP1	0x00	UsrChName

GnS:           0 = Set  
               1 = Get

Tgt            0 = RAM  
               1 = Flash

ChP1           1 = Channel 0 (Frame Number)  
               2 = Channel 1 (Distance)

UsrChName:    User defined name for the channel  
               Null-terminated string, max. 20+1 characters





## 4. Technical Specifications

### 4.1 Current Consumption

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$I_q$	Operating current				60	mA
$I_{Stby}$	Standby current	No USB activity			500	$\mu$ A

### 4.2 Mechanical Dimensions

The PCB is designed to be mounted using two standard M2 screws. There are no components on the back side of the PCB

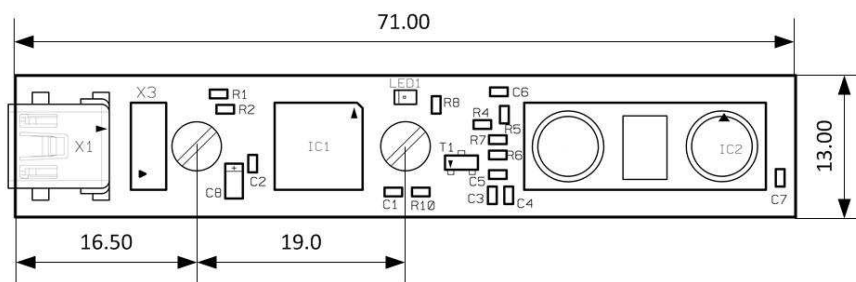


Figure 1: Mechanical dimensions of the Oak Dist sensor

### 4.3 RoHS Compliance

Unless otherwise stated, all Toradex products comply with the European Union’s Directive 2002/95/EC: "Restrictions of Hazardous Substances".

### 4.4 Pin Assignment USB Connector

An additional crimped connector (X1) is provided for the USB interface. The connector is a 5 pin through-hole of the Picoblade family by Molex ([www.molex.com](http://www.molex.com)), reference 53047-0510.

Pin	Name	Function
1	Shield	Connected to GND on pcb
2	GND	Ground reference
3	D+	Positive USB data
4	D-	Negative USB data
5	USB_VCC	5V USB Supply from host



**Disclaimer:**

Copyright © Toradex AG. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies.

Brand and product names are trademarks or registered trademarks of their respective owners.

Specifications are subject to change without notice.