



PWM CONTROL 3A STEP-DOWN CONVERTER

FEATURES

- Input Voltage : 8V to 40V
- Output Voltage : 3.3V to 38V
- Duty Ratio : 0% to 100% PWM Control
- Oscillation Frequency Range is 50K~350KHz
by Outside Resistance Setting
- Enable with Soft-Start Function
- Current Limit, Short Circuit Protect (SCP)
and Thermal Shutdown Protection
- Built-in Internal SW P-channel MOS.
- ESOP-8 & PDIP-8 Pb-Free Package
- Halogen Free Product


DESCRIPTION

APE1811 consists of step-down switching regulator with PWM control. These device include a reference voltage source, oscillation circuit, error amplifier, internal PMOS and etc.

APE1811 provides low-ripple power, high efficiency, and excellent transient characteristics. The PWM control circuit is able to the duty ratio linearly form 0 up to 100%. This converter is build out soft start function that prevents overshoot and inrush current at startup. An over current protect function and short circuit protect function are built inside, and when OCP or SCP happens, the operation frequency will be reduced. The operating frequency is decided by outside resistance. An external compensation is easily to system stable; the low ESR output capacitor can be used.

With the addition of an internal P-channel Power MOS, a coil, capacitors, and a diode connected externally, these ICs can function as step-down switching regulators. They serve as ideal power supply units for portable devices when coupled with the ESOP-8 packages, providing such outstanding features as low current consumption. Since this converter can accommodate an input voltage up to 40V, it is also suitable for the operation via an AC adapter.

TYPICAL APPLICATION

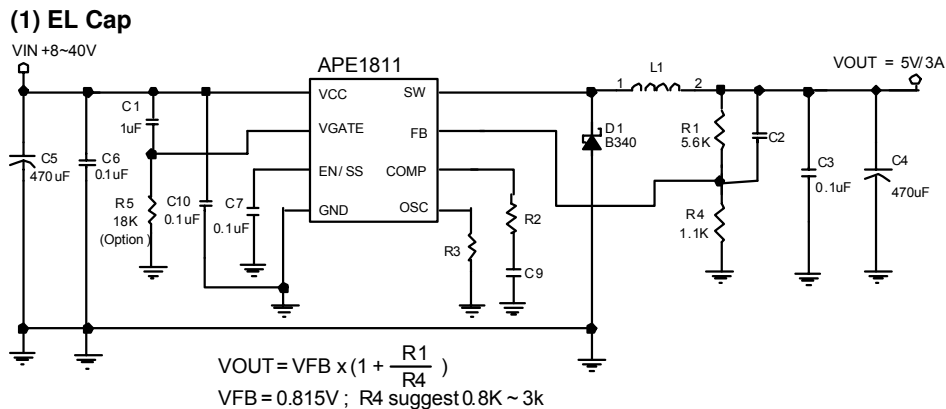


EL Capacitor Compensation Table						
C _{OUT} ESR Range	Frequency (Hz)	V _{IN} Range	R2	C9	C2	L1
30m~80mΩ	50K	8~40V	470	4n7	2700p	100u
	150K		470	4n7	1200p	68u
	250K		470	4n7	1000p	33u
	350K		470	4n7	1200p	22u
80m~300mΩ	50K		470	4n7	2700p	100u
	150K		470	4n7	1500p	68u
	250K		470	4n7	560p	33u
	350K		470	4n7	270p	22u



TYPICAL APPLICATION

(2) Tantalum Chip Cap


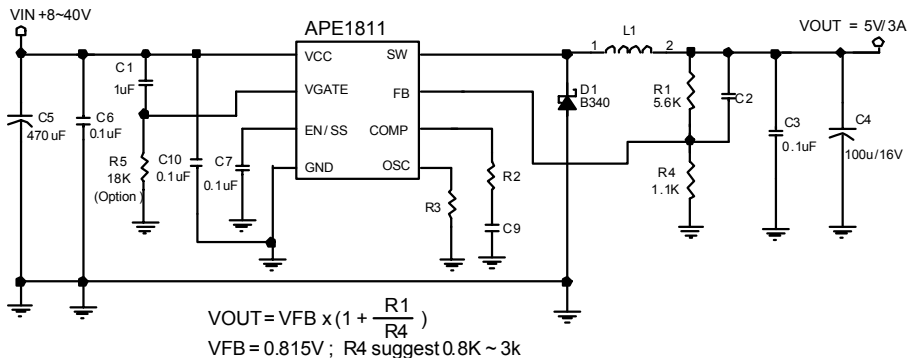


Tantalum Capacitor Compensation Table					
Frequency (Hz)	VIN Range	R2	C9	C2	L1
50K	8~40V	750	1n	2700p	100uH
150K		470	4n7	1000p	66uH
300K		470	10n	560p	33uH

PACKAGE/ORDERING INFORMATION

APE1811 X

Package Type
MP : ESOP-8
D : PDIP-8

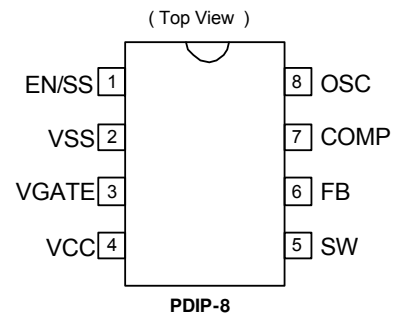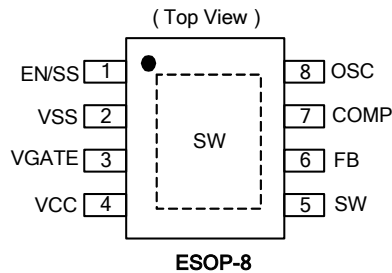

ABSOLUTE MAXIMUM RATINGS (at T_A=25°C)

V _{CC} PIN Voltage(V _{CC})	V _{SS} -0.3V to V _{SS} +45 V
Feedback PIN Voltage(V _{FB})	V _{SS} -0.3V to 6V
ON/SS PIN Voltage(V _{EN/SS})	V _{SS} -0.3V to 6V
OSC PIN Voltage(V _{OSC})	V _{SS} -0.3V to 3V
COMP PIN Voltage(V _{COMP})	V _{SS} -0.3V to 6V
VGATE PIN Voltage(V _{GATE})	V _{SS} -0.3V to V _{CC}
Switch PIN Voltage(V _{SW})	V _{SS} -0.3V to V _{CC} +0.3V
Power Dissipation(P _D)	Internally Limited
Storage Temperature Range(T _{ST})	-65°C To 150°C
Operation Junction Temperature Range(T _{OPJ})	-40°C To 125°C
Operating Supply Voltage(V _{OP})	8V to 40V
Thermal Resistance from Junction to Case(R _{thjc})	
ESOP-8	15°C/W
PDIP-8	50°C/W
Thermal Resistance from Junction to Ambient(R _{thja}) ^{Note.}	
ESOP-8	40°C/W
PDIP-8	100°C/W

Note. R_{thja} is measured with the PCB copper area(need connect to Exposed Pad) of approximately 1.5 in²(Multi-layer).




ELECTRICAL SPECIFICATIONS ($V_{IN}=12V$, $T_A=25^{\circ}C$, unless otherwise specified)

Parameter	SYM	TEST CONDITION	MIN	TYP	MAX	UNITS
Feedback Voltage	V_{FB}	$V_{CC} = 10V\sim 30V$, $I_{OUT} = 0$ to $2A$, $T_J = -20^{\circ}C\sim 125^{\circ}C$	0.8	0.815	0.83	V
Quiescent Current	I_{CCQ}	$V_{FB}=1.2V$ force driver off	-	3	6	mA
Feedback Bias Current	I_{FB}	$I_{OUT}=0.1A$	-	0.1	0.5	μA
Shutdown Supply Current	I_{SD}	$V_{EN/SS} = 0V$	-	3	6	mA
Switch Current	I_{SW}		3.5	-	-	A
Adjustable Frequency Range	F_{OSC}		50	-	380	KHz
Short Frequency	F_{OSC1}	$V_{CC} = 10V\sim 30V$	45	55	65	KHz
EN/SS Pin Shutdown Logic Input Threshold Voltage	V_{ENL}		-	-	0.8	V
EN/SS Pull high Current	$I_{EN/SS}$	$V_{EN/SS}=0V$	-	5	-	μA
Internal MOSFET R_{DSON}	R_{DSON}	$V_{CC}=12V$, $V_{FB}=0V$	-	130	180	$m\Omega$
Efficiency	EFFI	$V_{CC} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 2A$	-	91	-	%
		$V_{CC} = 30V$, $V_{OUT} = 5V$, $I_{OUT} = 2A$	-	87	-	%

PIN DESCRIPTIONS

PIN SYMBOL	PIN DESCRIPTION
V_{SS}	GND Pin
FB	Feedback Pin
EN/SS	ON/OFF Shutdown and Soft-start pin
SW	Switch Pin. Connect External Inductor & Diode here.
VGATE	Driver GATE clamping pin. The pin must connect a $1\mu F$ capacitor to V_{CC}
V_{CC}	IC Power Supply Pin
COMP	Compensation pin
OSC	Frequency Set Pin. The pin connect a resistance to GND.

BLOCK DIAGRAM

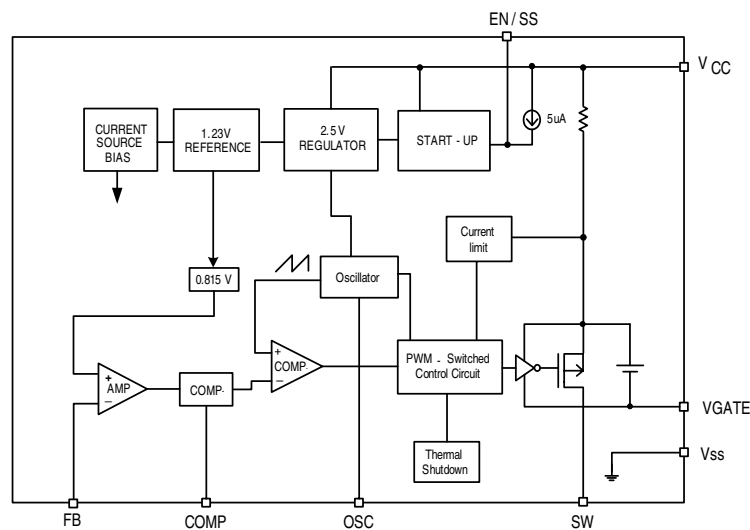



FUNCTION DESCRIPTION

EN/SS

This pin can be supplied shutdown or soft start function. It is inside pull high function. For normal application, the pin must be connected a capacitor to ground. There is a 5uA current to charge this capacitor, vary the different capacitor value to control soft start time. Allow the switching regulator circuit to be shutdown pulling this pin below a 0.8V threshold voltage.

OSC

External frequency set pin. The pin connects a resistance (R3) to reduce system frequency. This converter's frequency can be set from 50K to 350KHz, please refer the below table to set frequency.

T=Room Temperature				
R3 (Ω)	10M	240K	110K	68K
Frequency (Hz)	52K	150K	250K	350K

COMP

Compensation pin. For EL output capacitor application, the COMP pin connects R2 and C9 to ground for all condition; please refer the compensation table.

APPLICATION INFORMATION

Setting the Output Voltage

Application circuit item shows the basic application circuit with adjustable output version. The external resistor sets the output voltage according to the following equation:

$$V_{OUT} = 0.815V \times \left(1 + \frac{R1}{R4} \right)$$

Table 1 Resistor select for output voltage setting

V _{OUT}	R4	R1
5V	1.1K	5.6K
3.3V	2.7K	8.2K



Inductor Selection

For most designs, the different frequency can be reducing the inductor value; The APE1811 is suggested 22μH to 100μH for 350K to 50KHz frequencies. Please refer the below table to design.

L1 recommend value (V _{IN} =8~40V ,V _{OUT} =5V, I _{OUT} =3A)				
Frequency (Hz)	50K	150K	250K	350K
L1 Value (H)	100uH	68uH	33uH	22uH

Where is inductor Ripple Current. Large value inductors lower ripple current and small value inductors result in high ripple currents. Choose inductor ripple current approximately 20% of the maximum load current 3A, ΔI_L=0.6A. The DC current rating of the inductor should be at least equal to the maximum load current plus half the ripple current to prevent core saturation (3A+0.3A).

Input Capacitor Selection

This capacitor should be located close to the IC using short leads and the voltage rating should be approximately 1.5 times the maximum input voltage. The RMS current rating requirement for the input capacitor of a buck regulator is approximately 1/2 the DC load current. A low ESR input capacitor sized for maximum RMS current must be used. A 470μF low ESR capacitor for most applications is sufficient.

Output Capacitor Selection







The output capacitor is required to filter the output and provide regulator loop stability. The important capacitor parameters are; the 100 KHz Equivalent Series Resistance (ESR), the RMS ripples current rating, voltage rating, and capacitance value. For the output capacitor, the ESR value is the most important parameter. The ESR can be calculated from the following formula.

$$V_{RIPPLE} = \Delta I_L \times ESR = 0.6A \times 80m\Omega = 48mV$$

An aluminum electrolytic capacitor's ESR value is related to the capacitance and its voltage rating. In most case, higher voltage electrolytic capacitors have lower ESR values. Most of the time, capacitors with much higher voltage ratings may be needed to provide the low ESR values required for low output ripple voltage. It is recommended to replace this low ESR capacitor by using a 470μF low ESR values <






TYPICAL PERFORMANCE CHARACTERISTICS

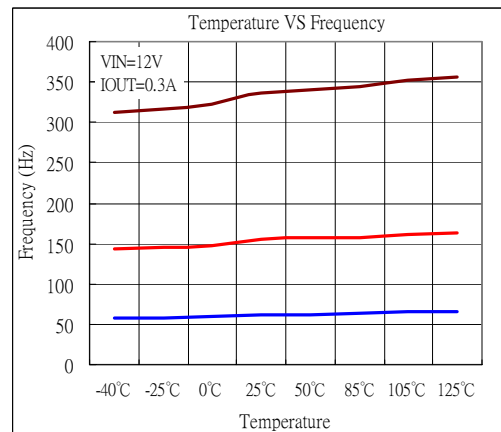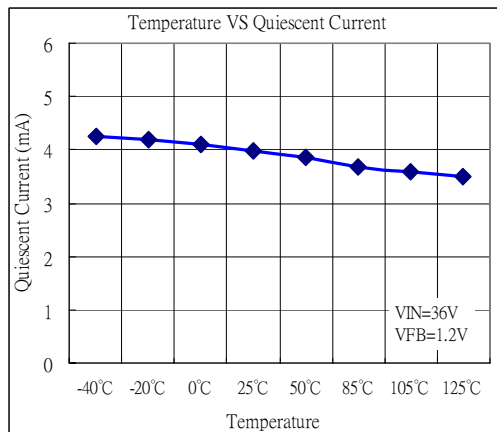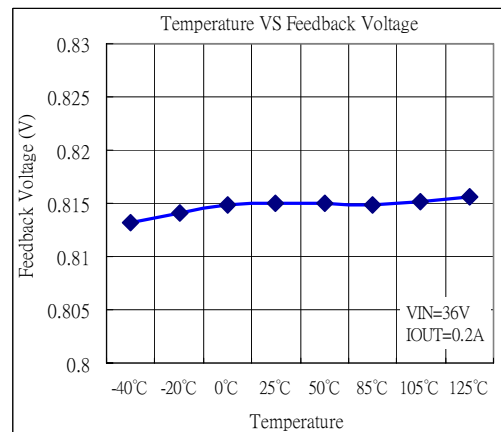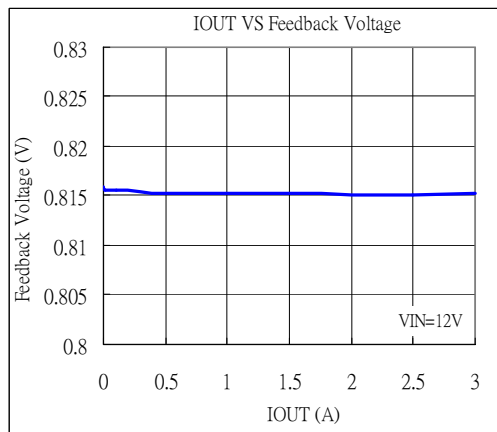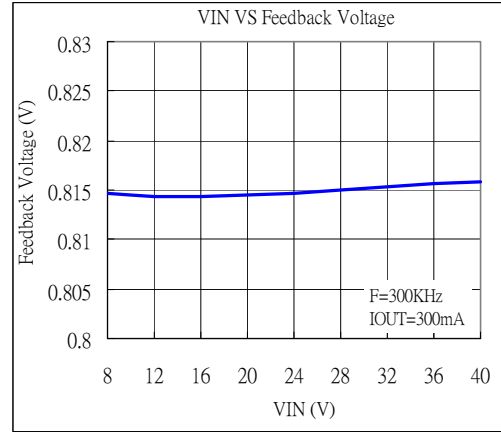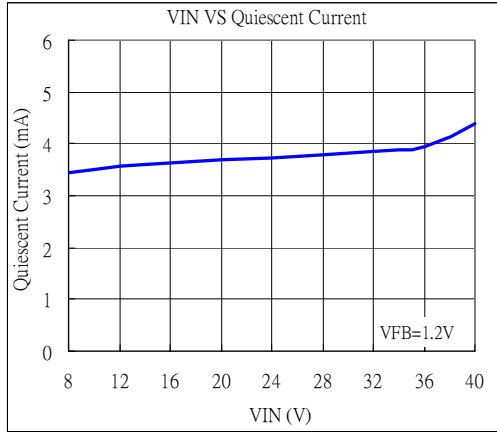




TYPICAL PERFORMANCE CHARACTERISTICS

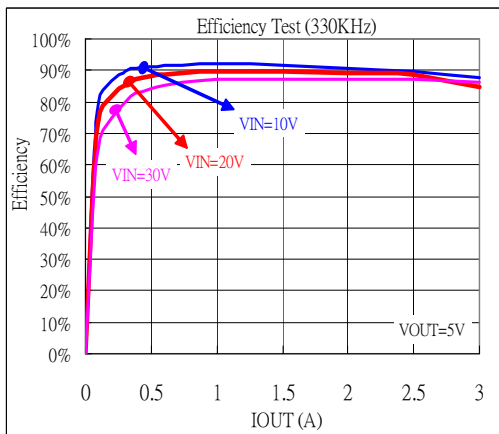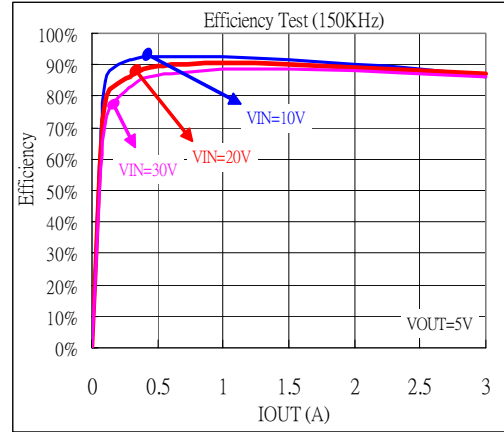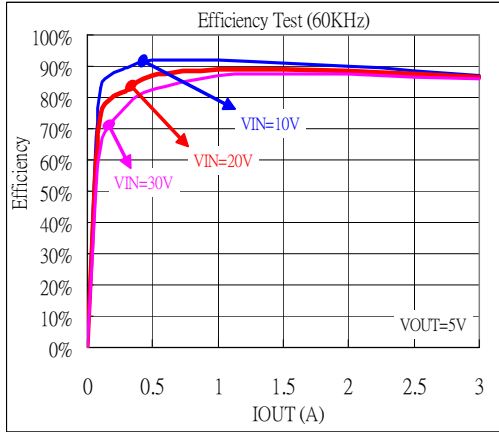




TYPICAL PERFORMANCE CHARACTERISTICS


Power-ON Wave (F=60KHz)
($V_{IN}=12V$, $V_{OUT}=5V$, Load=2A, $C_{EN/SS}=0.1\mu F$)

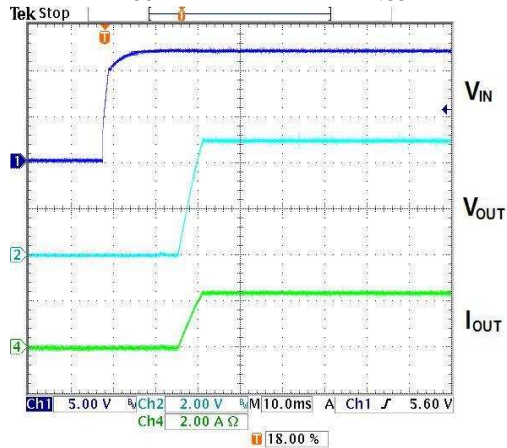


Power-ON Wave (F=60KHz)
($V_{IN}=24V$, $V_{OUT}=5V$, Load=2A, $C_{EN/SS}=0.1\mu F$)

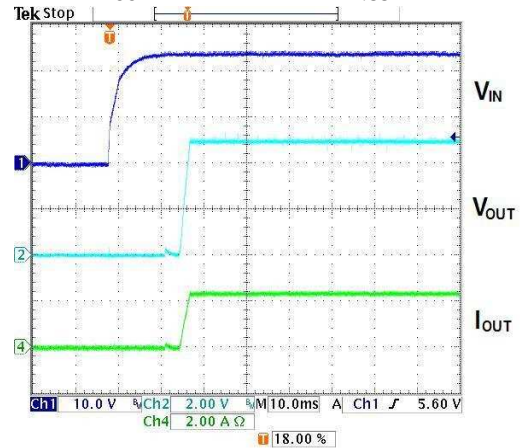


Enable-ON Wave (60KHz)
($V_{IN}=12V$, $V_{OUT}=5V$, Load=2A, $C_{EN/SS}=0.1\mu F$)

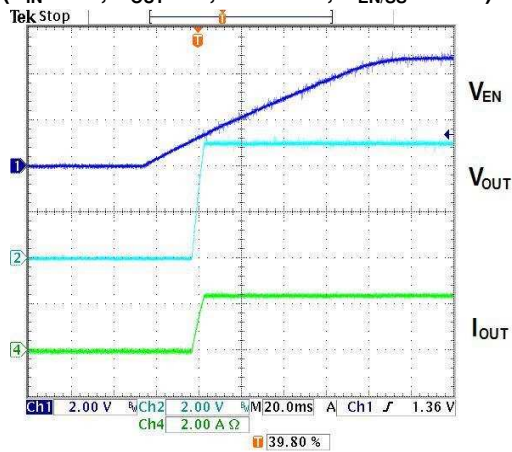


Enable-ON Wave (60KHz)
($V_{IN}=24V$, $V_{OUT}=5V$, Load=2A, $C_{EN/SS}=0.1\mu F$)

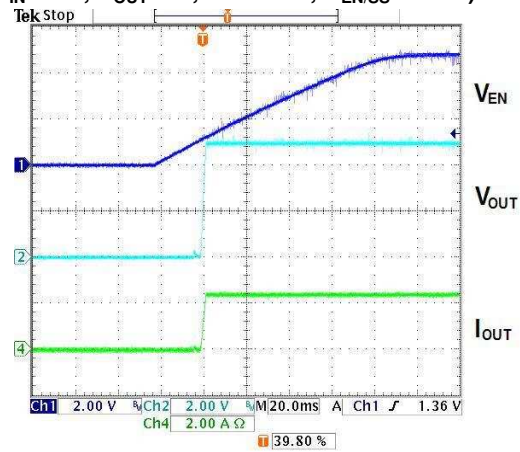

Load Transient (F=60KHz)
($V_{IN}=12V$, $V_{OUT}=5V$, Load=0.3~2.7A)

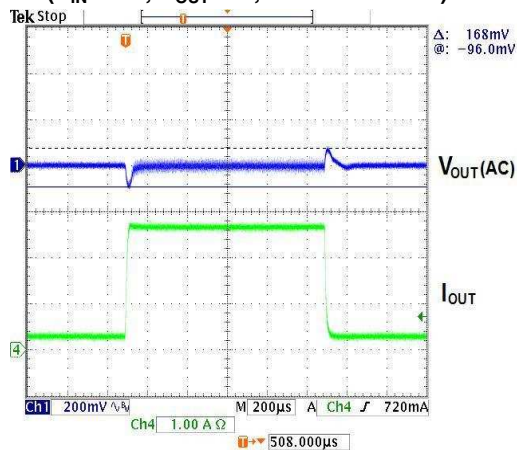


Load Transient (F=60KHz)
($V_{IN}=24V$, $V_{OUT}=5V$, Load=0.3~2.7A)

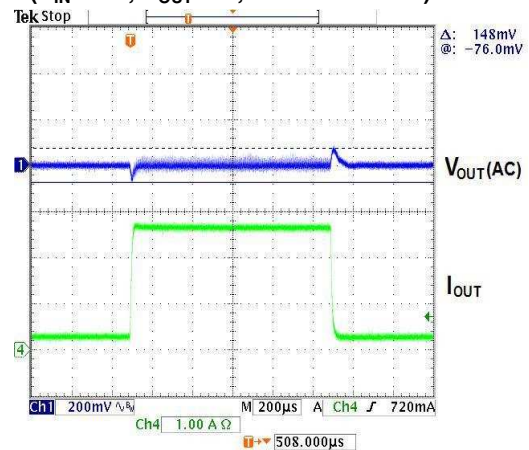



MARKING INFORMATION

ESOP-8

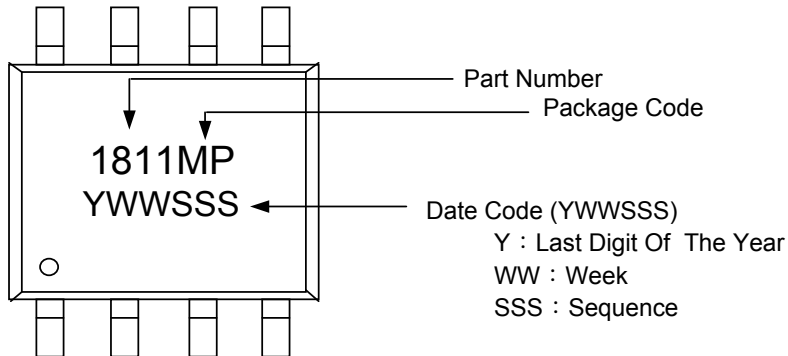

PDIP-8

