




# Mask/Waveform Limit Testing For InfiniiVision Series Oscilloscopes

## Data Sheet

Test waveforms to specified standards in seconds instead of hours using hardware-accelerated mask testing

### Features

- Test up to 270,000 waveforms per second with the industry's fastest hardware-accelerated mask testing technology
- Automatic mask creation using input standard
- Easily download multi-region masks and setups based on industry standards
- Detailed pass/fail statistics
- Test to high-quality standards based on sigma
- Multiple user-selectable test criteria

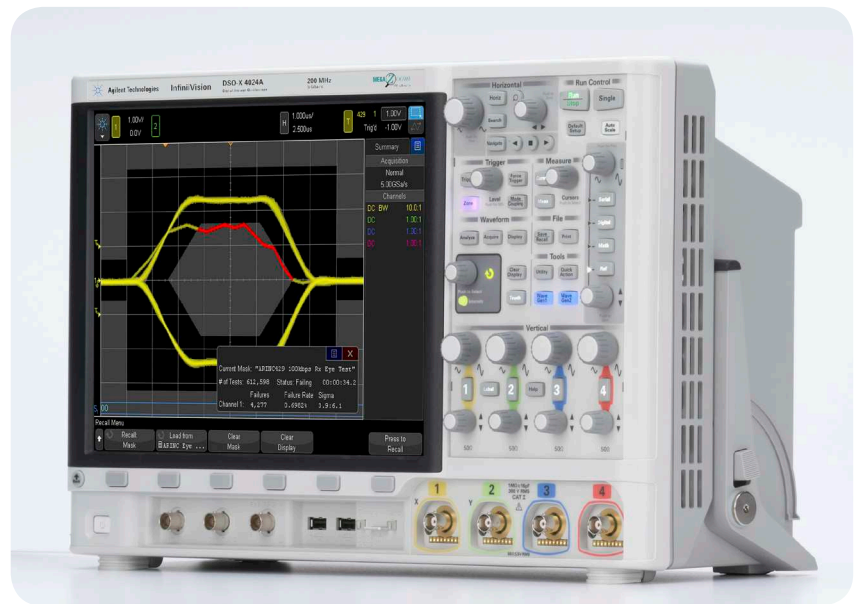

If you need to validate the quality and stability of your electronic components and systems, Agilent's mask test option for InfiniiVision Series oscilloscopes can save you time and provide pass/fail statistics almost instantly. The mask test option offers a fast and easy way to test your signals to specified standards, as well as the ability to uncover unexpected signal anomalies, such as glitches. Mask testing on other oscilloscopes is usually based on software-intensive processing technology, which tends to be slow. Agilent's InfiniiVision scopes mask test option is based on hardware-accelerated technology, meaning that InfiniiVision Series oscilloscopes can perform up to 270,000 real-time waveform pass/fail tests per second. This makes your testing throughput orders of magnitude faster than you can achieve on other oscilloscope mask test solutions.



## Using AutoMask

Figure 1 shows an example where we automatically created a pulse-shaped mask using an input signal standard. You can easily specify horizontal and vertical tolerance bands in either divisions or absolute volts and seconds. We set up the mask test to run continuously in order to accumulate valid pass/fail statistics. In this example, we quickly detected an infrequent glitch. After running the test for just a few seconds, the mask test statistics showed that the scope performed the pass/fail mask test on more than 1,000,000 waveforms and detected just two errors for a computed error rate of 0.0002%. In addition, we can see that this particular signal has a sigma quality relative to the mask tolerance of approximately 6.1  $\sigma$ .

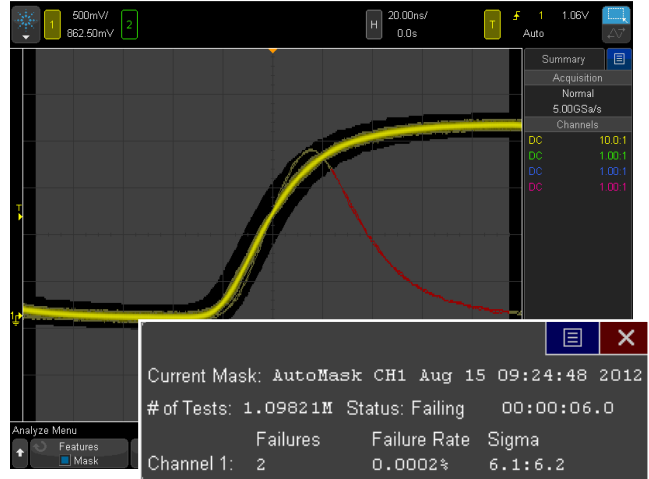


Figure 1: Mask testing uncovers an infrequent signal anomaly.

## Importing an industry-standard mask

Figure 2 shows an example of an eye-diagram mask test. This particular polygon-shape mask is based on a published standard and was created on a PC using a simple text editor. We then imported the mask and setup parameters into the scope via a USB memory stick.

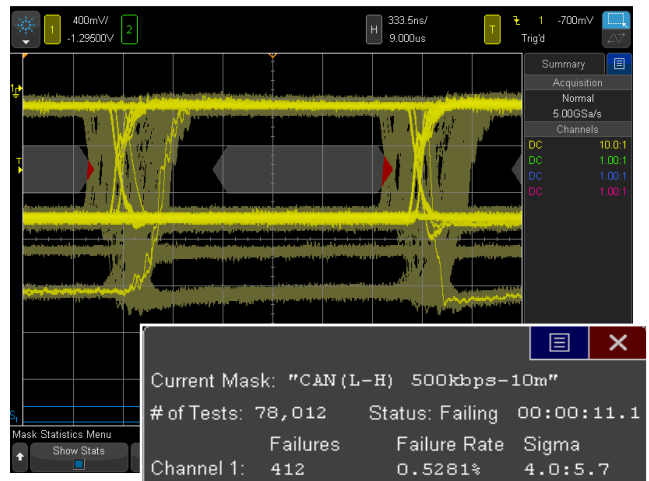


Figure 2: Testing an eye-diagram with an imported industry-standard mask.

## Multiple test criteria

When setting up your specific mask test criteria, you can choose from multiple options including:

- Run forever (with accumulated pass/fail statistics)
- Run until a specified number of tests
- Run until a specified time duration
- Run until a maximum ideal sigma standard
- Stop-on-failure
- Save-on-failure
- Print-on-failure
- Trigger out-on-failure

## Six Sigma mask testing

Agilent InfiniiVision Series scopes are the first in the industry that can report mask test pass/fail statistics in sigma quality. InfiniiVision's fast acquisition and waveform mask test rate of up to 270,000 waveforms/sec makes this possible and for the first time, practical. If waveform failures follow a random/Gaussian failure distribution, Six Sigma quality represents approximately three failures/defects or fewer out of a test sample of 1,000,000. InfiniiVision Series scopes can test up to a Six Sigma standard in as little as 1.1 seconds. To learn more about waveform mask testing to Six Sigma quality standards, refer to the application note, "Oscilloscope Mask Testing for Six Sigma Quality Standards" listed at the end of this document.

## Performance Characteristics

<b>Mask test source</b>	Analog channels 1, 2, 3, or 4
<b>Maximum test rate</b>	5000, 6000, 7000 Series: Up to 100,000 waveforms tested per second 3000 and 4000 X-Series: Up to 270,000 waveforms tested per second 2000 X-Series: Up to 50,000 waveforms tested per second
<b>Acquisition modes</b>	Real-time sampling–non-averaged, Real-time sampling–averaged
<b>Mask creation</b>	
<b>Automask-divisions</b>	+/- X divisions, +/- Y divisions
<b>Automask-absolute</b>	+/- X seconds, +/- Y volts
<b>Mask file import</b>	Up to 8 failure regions (created in text editor)
<b>Mask scaling</b>	Source lock on (mask automatically re-scales with scope settings) Source lock off (mask scaling fixed relative to display when loaded or created)
<b>Test criteria</b>	Run until forever, Minimum number of tests, Minimum time, Minimum sigma,
<b>Action on error</b>	Stop acquisitions, save image, print, perform measurements
<b>Trigger output</b>	On failure
<b>Statistics display</b>	Number of tests, Number of failures (for each channel tested), Failure rate (for each channel tested), Test time (hours – minutes – seconds), Sigma (actual versus maximum without failures)
<b>Display formats</b>	Mask – translucent gray, Failing waveform segments – red, Passing waveform segments – channel color
<b>Save/recall</b>	4 non-volatile internal registers (.msk format), USB memory stick (.msk format)

## Ordering Information

The mask/waveform limit test option is compatible with all Agilent InfiniiVision Series oscilloscopes.

InfiniiVision model	Mask test options
<b>2000 X-Series</b>	DSOX2MASK
<b>3000 X-Series</b>	DSOX3MASK
<b>4000 X-Series</b>	DSOX4MASK
<b>5000,60000, and 7000 Series</b>	N5455A

## Related Agilent literature

Publication Title	Publication Type	Publication Number
<i>InfiniiVision 7000B Series Oscilloscopes</i>	Data sheet	5990-4769EN
<i>InfiniiVision 4000 X-Series Oscilloscopes</i>	Data sheet	5991-1103EN
<i>InfiniiVision 3000 X-Series Oscilloscopes</i>	Data sheet	5990-6619EN
<i>InfiniiVision 2000 X-Series Oscilloscopes</i>	Data sheet	5990-6618EN
<i>InfiniiVision Series Oscilloscope Probes and Accessories</i>	Data sheet	5968-8153EN
<i>Oscilloscope Mask Testing for Six Sigma Quality Standards</i>	Application note	5990-3200EN
<i>Oscilloscope Waveform Update Rate Determines Probability of Capturing Elusive Events</i>	Application note	5989-7885EN
<i>FlexRay Physical Layer Eye-diagram Mask Testing</i>	Application note	5990-4923EN

To download these documents, insert the publication number in the URL:  
<http://cp.literature.agilent.com/litweb/pdf/xxxx-xxxxEN.pdf>



[www.agilent.com/find/myagilent](http://www.agilent.com/find/myagilent)

A personalized view into the information most relevant to you.



[www.lxistandard.org](http://www.lxistandard.org)

LXI is the LAN-based successor to GPIB, providing faster, more efficient connectivity. Agilent is a founding member of the LXI consortium.

### Agilent Channel Partners

[www.agilent.com/find/channelpartners](http://www.agilent.com/find/channelpartners)

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. We share measurement and service expertise to help you create the products that change our world. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair, reduce your cost of ownership, and move us ahead of your development curve.

[www.agilent.com/find/advantageservices](http://www.agilent.com/find/advantageservices)



[www.agilent.com/quality](http://www.agilent.com/quality)

[www.agilent.com](http://www.agilent.com)

[www.agilent.com/find/masktest](http://www.agilent.com/find/masktest)

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

### Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201


For other unlisted countries:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

Revised: October 11, 2012

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012  
Published in USA, November 7, 2012  
5990-3269EN

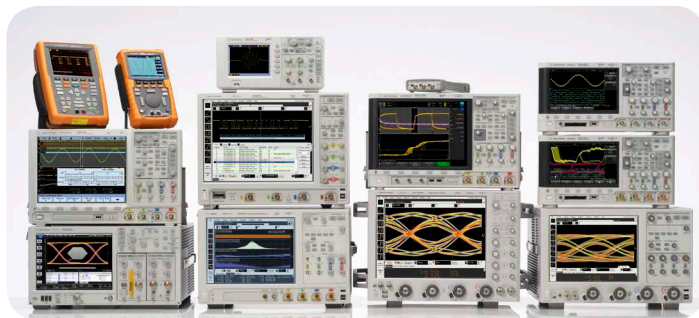

Agilent Technologies Oscilloscopes

Multiple form factors from 20 MHz to > 90 GHz | Industry leading specs | Powerful applications



**Agilent Technologies**