



# Agilent U1210 Series Handheld Clamp Meters

Handle big currents – more safely

Data Sheet

## Features

- Large clamp opening of 52 mm or 2"
- High measurement capability of up to 1000 A for AC, DC or AC+DC
- CAT III 1000 V/CAT IV 600 V safety rating
- *Bluetooth*<sup>®</sup> wireless connectivity (optional U1177A Infrared (IR)-to-*Bluetooth* Adapter required)
- Includes full-featured DMM with resistance, capacitance, frequency and temperature functions
- High resolution measurements – measure current as low as 0.01 mA
- Peak hold
- Dual ranging mode – manual and auto
- Large dual display
- Min/max recording capability



Measurements of electrical distribution cables can be challenging and risky. For cables up to two inches in diameter, the Agilent U1210 Series handheld clamp meters enable high-current measurements without breaking the circuit. Unlike most clamp meters, they also include DMM capabilities—resistance, capacitance, frequency and temperature—to simplify troubleshooting during installation and maintenance. Best of all, they provide an extra layer of protection with CAT IV 600V and CAT III 1000 V safety ratings.



# Key Measurements


## Measure current easily and accurately

Agilent U1210 Series handheld clamp meters come with clamp opening of 52 mm/2 inches and high current measurement capability of up to 1000 A (AC, DC, AC+ DC). With the large jaw size, these handhelds simplify current measurements for thick cables. Clamp on with the U1210 Series and get convenience, versatility and the ability to handle big currents—safely.



## Full-featured digital multimeter functions

The U1210 Series handheld clamp meters provide basic functions of a multimeter with wide measurement ranges to cater for a broad range of applications (ACA, DCV, ACV, OHM, audible continuity, diode and frequency tests). These meters also provide auto-ranging capability, built-in peak hold for in-rush current measurement, temperature and capacitance measurement capability, large backlight display and one-hand operation.

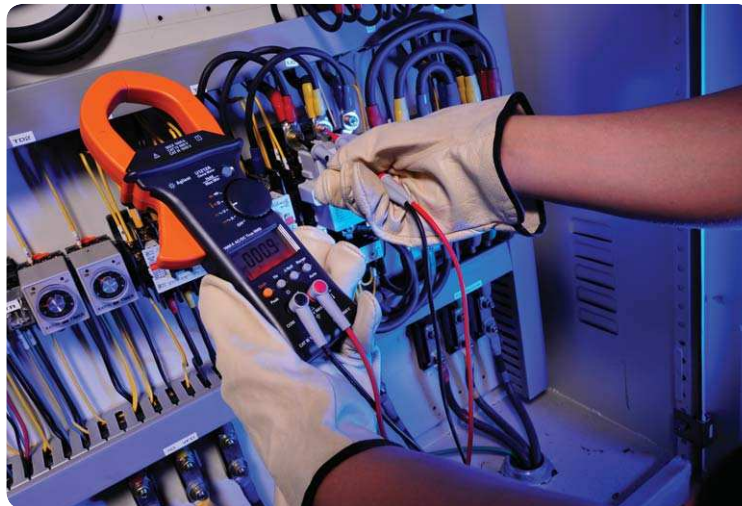

## Smooth sailing measurements even in a distance

Making current measurements can be strenuously demanding due to its complexity and high current involved. Electrical distribution rooms being typically situated at different areas further complicates maintenance and troubleshooting due to the need to commute back and forth to cross check measurement results.



By adding the new *Bluetooth* capability to your existing U1210 series handheld clamp meters, you are able to make high current measurements in a safer and more

convenient manner. With the U1177A Infrared-to-*Bluetooth* adapter, you can easily monitor measurements and log data up 10-metres range across all

Android platform devices- an added value for maximum efficiency and productivity in all sorts of hard-to-reach environments.

# Take a Closer Look



## General Specifications

| Title                              | Specification   |
|------------------------------------|---|
| Dimension                          | <ul style="list-style-type: none"> <li>• U1211A: 106 mm (W) X 273 mm (L) X 43 mm (H)</li> <li>• U1212A and U1213A: 106 mm (W) X 260 mm (L) X 43 mm (H)</li> </ul>   |
| Net Weight                         | <ul style="list-style-type: none"> <li>• U1211A: 625 grams with batteries included</li> <li>• U1212A and U1213A: 525 grams with batteries included</li> </ul>   |
| Display                            | 4 digits with maximum reading 4,100 counts. The 12 Segments analog bar graph and full annunciator. Automatic polarity indication.   |
| Battery                            | Standard 9 V Battery - Alkaline   |
| Low battery indicator              | Battery voltage drops below 6.0 V   |
| Power consumption                  | <ul style="list-style-type: none"> <li>• U1211A: 186 mVA maximum</li> <li>• U1212A and U1213A: 220 mVA maximum</li> </ul>   |
| Battery life                       | 60 hours (typical)  |
| Connectivity                       | Wireless <i>Bluetooth</i> compatible  |
| Maximum jaw opening                | ~2 inches   |
| Temperature coefficient            | 0.12 x (specified accuracy)/°C (from 0 to 18 °C or 28 to 50 °C)   |
| NMRR (Normal Mode Rejection Ratio) | This series has a NMRR specification of > 60 dB at 50 Hz and 60 Hz, which means a good ability to reject the effect of AC noise in DC measurement   |
| CMRR (Common Mode Rejection Ratio) | <ul style="list-style-type: none"> <li>• U1211A and U1212A have CMRR specifications of &gt; 60 dB at DC to 60 Hz in the ACV function; and &gt; 80 dB at DC, 50 Hz and 60 Hz in the DCV function.</li> <li>• U1213A has a CMRR specifications of &gt; 60 dB at DC to 60 Hz in the ACV function; and &gt; 120 dB at DC, 50 Hz and 60 Hz in the DCV function.</li> </ul> |
| Operating temperature              | -10 to 50 °C, 0 to 80 % R.H.  |
| Storage temperature                | -20 to 60 °C, 0 to 80 % R.H.  |
| Relative Humidity (R.H.)           | Maximum 80 % R.H. for temperature up to 31 °C decreasing linearly to 50 % R.H. at 50 °C   |
| Temperature coefficient            | 0.1 × (specified accuracy) / °C (from 0 °C to 18 °C or 28 °C to 50 °C)  |
| Safety compliance                  | EN/IEC 61010-1:2001, ANSI/UL 61010-1:2004, and CAN/CSA-C22.2 No.61010-1-04  |
| Measurement category               | CAT III 1000 V/ CAT IV 600 V  |
| EMC compliance                     | <ul style="list-style-type: none"> <li>• Certified to IEC61326-1:2005/ EN61326-1:2006</li> <li>• CISPR 11:2003/ EN 55011:2007 Group 1 class A</li> <li>• Canada: ICES-001:2004</li> <li>• Australia/New Zealand: AS/NZS CISPR11:2004</li> </ul>   |

# Electrical Specifications for U1211A

Accuracy is given as  $\pm$  (% of reading + number of least significant digits) at  $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ , with relative humidity less than 80 % R.H.

ACV/ ACA specifications are ac coupled, true R.M.S. and are valid from 5 % of range to 100 % of range. The crest factor may be up to 3.0 at full-scale except the 1000 V and 1000 A ranges where these are 1.5 at full scale. For non-sinusoidal waveforms, add (2 % reading + 2 % full scale) typical, for crest factors up to 3.

## DC voltage

| Range  | Resolution | Accuracy  | Overload protection |
|--------|------------|-----------|---------------------|
| 400 V  | 0.1 V      | 0.5 % + 5 | 1000 V R.M.S        |
| 1000 V | 1 V        | 0.5 % + 3 |                     |

- Input impedance: 10 M $\Omega$  (nominal)

## AC voltage

| Range  | Resolution | Accuracy  | Overload protection |
|--------|------------|-----------|---------------------|
|        |            | 45~400 Hz |                     |
| 400 V  | 0.1 V      | 1 % + 5   | 1000 V R.M.S        |
| 1000 V | 1 V        | 1 % + 5   |                     |

- Input impedance: 10 M $\Omega$  (nominal) in parallel with < 100 pF

## Voltage (1 ms peak hold)

| Range  | Resolution | Accuracy | Overload protection |
|--------|------------|----------|---------------------|
| 400 V  | 0.1 V      | 1 % + 43 | 1000 V R.M.S        |
| 1000 V | 1 V        | 1 % + 43 |                     |

- Specified accuracy for changes > 1 ms in duration

## Diode check/audible continuity test

| Range | Resolution | Accuracy  | Test current         | Open voltage |
|-------|------------|-----------|----------------------|--------------|
| Diode | 0.001 V    | 0.5 % + 2 | Approximately 0.8 mA | < +3.1 V     |

- Overload protection: 1000 V R.M.S. for circuits < 0.3 A of short circuit current
- Built-in buzzer sounds when reading is below 50 mV approximately and single tone for normal forward-biased diode or semiconductor junction as  $0.3\text{ V} \leq \text{Reading} \leq 0.8\text{ V}$

## Resistance

| Range        | Resolution       | Accuracy  | Test current     |
|--------------|------------------|-----------|------------------|
| 400 $\Omega$ | 0.1 $\Omega$     | 0.5 % + 3 | 0.8 mA           |
| 4 k $\Omega$ | 0.001 k $\Omega$ | 0.5 % + 3 | 80 $\mu\text{A}$ |

Notes:

1. Overload protection: 1000 V R.M.S. for circuits < 0.3 A of short circuit current
2. Maximum open voltage: < +3.1 V
3. Instant continuity: Built-in buzzer sounds when resistance is less than 10.0  $\Omega$
4. The accuracy of 400  $\Omega$  and 4 k $\Omega$  is specified after Relative function, which is used to substrate the test lead resistance and the thermal effect

## Electrical Specifications for U1211A (continued)

### Capacitance

| Range        | Resolution  | Accuracy | Overload protection  |
|--------------|-------------|----------|--|
| 400 $\mu$ F  | 0.1 $\mu$ F | 2 % + 4  | 1000 V R.M.S. for circuits<br>< 0.3 A of short circuit current |
| 4000 $\mu$ F | 1 $\mu$ F   | 3 % + 4  |  |

- The accuracy is based on film capacitor or better and use Relative mode to zero residual value

### AC current

| Range      | Resolution | Accuracy * N1 |            |              |
|------------|------------|---------------|------------|--------------|
|            |            | 45~65 Hz      | 65~400 Hz  | 400 Hz~1 kHz |
| 40 A       | 0.01 A     | 1.0 % + 10    | 1.0 % + 10 | 3.0 % + 10   |
| 400 A      | 0.1 A      | 1.0 % + 5     | 1.0 % + 5  | 3.0 % + 5    |
| 400~700 A  | 1 A        | 1.0 % + 5     | 1.0 % + 5  | 3.0 % + 5    |
| 700~1000 A | 1 A        | 1.0 % + 5     | None       | None         |

- Maximum overload: 1000 A R.M.S. The accuracy is specified on the symmetrical waveforms.
- N1: The maximum verification of current and frequency product is less than 400,000 A x Hz

#### WARNING:

The measuring duty cycle should not exceed the following limits.

|                     |                               |
|---------------------|-------------------------------|
| 0 ~ 600 A R.M.S.    | Continuous                    |
| 600 ~ 700 A R.M.S.  | 10 minutes ON, 10 minutes OFF |
| 700 ~ 1000 A R.M.S. | 5 minutes ON, 20 minutes OFF  |

### Current (1 ms peak hold)

| Range  | Resolution | Accuracy   | Maximum overload |
|--------|------------|------------|------------------|
| 40 A   | 0.01 A     | 2.0 % + 70 | 1000 A R.M.S.    |
| 400 A  | 0.1 A      | 2.0 % + 43 |                  |
| 1000 A | 1 A        | 2.0 % + 43 |                  |

- Specified accuracy for changes > 1 ms in duration

## Electrical Specifications for U1211A (continued)

### Frequency (AC coupling)

| Range     | Resolution | Accuracy  | Minimum frequency |
|-----------|------------|-----------|-------------------|
| 99.99 Hz  | 0.01 Hz    | 0.2 % + 3 | 10 Hz             |
| 999.9 Hz  | 0.1 Hz     |           |                   |
| 9.999 kHz | 0.001 kHz  |           |                   |
| 99.99 kHz | 0.01 kHz   |           |                   |
| 999.9 kHz | 0.1 kHz    |           |                   |

• *Overload protection: 1000 V; < 20,000,000 V x Hz*

### Sensitivity

| Frequency sensitivity                      |                              |                       |
|--|------------------------------|-----------------------|
| Range                                      | Minimum sensitivity (R.M.S.) |                       |
| Maximum input for specified accuracy of AC | 40 Hz~2 kHz                  | 10~40 Hz or 2~100 kHz |
| 400 V                                      | 6 V                          | 6 V                   |
| 1000 V                                     | 20 V                         | 30 V (< 10 kHz)       |
| 40 A                                       | 3 A (< 1 kHz)                | 3 A (< 1 kHz)         |
| 400 A                                      | 20 A (< 1 kHz)               | 20 A (< 1 kHz)        |
| 1000 A                                     | 50 A (1 kHz)                 | 50 A (< 1 kHz)        |

# Electrical Specifications for U1212A

Accuracy is given as  $\pm$  (% of reading + number of least significant digits) at  $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ , with relative humidity less than 80 % R.H.

ACV/ ACA specifications are ac coupled, true R.M.S. and are valid from 5 % of range to 100 % of range. The crest factor may be up to 3.0 at full-scale except the 1000 V and 1000 A ranges where these are 1.5 at full scale. For non-sinusoidal waveforms, add (2 % reading + 2 % full scale) typical, for crest factors up to 3.

## DC voltage

| Range  | Resolution | Accuracy  | Overload protection |
|--------|------------|-----------|---------------------|
| 400 V  | 0.1 V      | 0.5 % + 3 | 1000 V R.M.S        |
| 1000 V | 1 V        | 0.5 % + 3 |                     |

- Input impedance: 10 M $\Omega$  (nominal)

## AC voltage

| Range  | Resolution | Accuracy  | Overload protection |
|--------|------------|-----------|---------------------|
|        |            | 45~400 Hz |                     |
| 400 V  | 0.1 V      | 1 % + 5   | 1000 V R.M.S        |
| 1000 V | 1 V        | 1 % + 5   |                     |

- Input impedance: 10 M $\Omega$  (nominal) in parallel with < 100 pF

## Voltage (1 ms peak hold)

| Range  | Resolution | Accuracy | Overload protection |
|--------|------------|----------|---------------------|
| 400 V  | 0.1 V      | 1 % + 43 | 1000 V R.M.S        |
| 1000 V | 1 V        | 1 % + 43 |                     |

- Specified accuracy for changes > 1 ms in duration

## Diode check/audible continuity test

| Range | Resolution | Accuracy  | Test current         | Open voltage |
|-------|------------|-----------|----------------------|--------------|
| Diode | 0.001 V    | 0.5 % + 2 | Approximately 0.8 mA | < +3.1 V     |

- Overload protection: 1000 V R.M.S. for circuits < 0.3 A of short circuit current
- Built-in buzzer sounds when reading is below 50 mV approximately and single tone for normal forward-biased diode or semiconductor junction as  $0.3\text{ V} \leq \text{Reading} \leq 0.8\text{ V}$

## Resistance

| Range        | Resolution       | Accuracy  | Test current     |
|--------------|------------------|-----------|------------------|
| 400 $\Omega$ | 0.1 $\Omega$     | 0.5 % + 3 | 0.8 mA           |
| 4 k $\Omega$ | 0.001 k $\Omega$ | 0.5 % + 3 | 80 $\mu\text{A}$ |

Notes:

1. Overload protection: 1000 V R.M.S. for circuits < 0.3 A of short circuit current
2. Maximum open voltage: < +3.1 V
3. Instant continuity: Built-in buzzer sounds when resistance is less than 10.0  $\Omega$
4. The accuracy of 400  $\Omega$  and 4 k $\Omega$  is specified after Relative function, which is used to substrate the test lead resistance and the thermal effect

## Electrical Specifications for U1212A (continued)

### Capacitance

| Range        | Resolution  | Accuracy | Overload protection  |
|--------------|-------------|----------|--|
| 400 $\mu$ F  | 0.1 $\mu$ F | 2 % + 4  | 1000 V R.M.S. for circuits<br>< 0.3 A of short circuit current |
| 4000 $\mu$ F | 1 $\mu$ F   | 3 % + 4  |  |

- The accuracy is based on film capacitor or better and use Relative mode to zero residual value

### DC current

| Range  | Resolution | Accuracy   | Maximum overload |
|--------|------------|------------|------------------|
| 40 A   | 0.01 A     | 1.5 % + 15 | 1000 A R.M.S.    |
| 400 A  | 0.1 A      | 1.5 % + 3  |                  |
| 1000 A | 1 A        | 2.0 % + 5  |                  |

- Use Relative mode to zero residual offset

### AC current

| Range  | Resolution | Accuracy * N1 |             | Maximum overload |
|--------|------------|---------------|-------------|------------------|
|        |            | 45~65 Hz      | 65 Hz~1 KHz |                  |
| 40 A   | 0.01 A     | 2.0 % + 10    | 3.0 % + 10  | 1000 A R.M.S.    |
| 400 A  | 0.1 A      | 2.0 % + 5     | 3.0 % + 5   |                  |
| 1000 A | 1 A        | 2.0 % + 5     | 3.0 % + 5   |                  |

- N1: The maximum verification of current and frequency product is less than 400,000 A x Hz

### Current (1 ms peak hold)

| Range  | Resolution | Accuracy   | Maximum overload |
|--------|------------|------------|------------------|
| 40 A   | 0.01 A     | 2.0 % + 70 | 1000 A R.M.S.    |
| 400 A  | 0.1 A      | 2.0 % + 43 |                  |
| 1000 A | 1 A        | 2.0 % + 43 |                  |

- Specified accuracy for changes > 1 ms in duration

### Temperature test

| Thermal type | Range         | Resolution | Accuracy   |
|--------------|---------------|------------|------------|
| K            | -200 ~ -40 °C | 0.1 °C     | 1 % + 3 °C |
|              | -40 ~ 1372 °C | 0.1 °C     | 1 % + 1 °C |
|              | -328 ~ -40 °F | 0.1 °F     | 1 % + 6 °F |
|              | -40 ~ 2502 °F | 0.1 °F     | 1 % + 2 °F |

#### Notes:

- The accuracy does not include the tolerance of the thermocouple probe, and the meter must be operational for at least one hour
- Do not allow the temperature sensor to contact a surface that is energized above 33 V R.M.S. or 70 V DC. Such voltages will pose a shock hazard.
- The temperature calculation is according to the standard of EN/IEC-60548-1 and NIST175

## Electrical Specifications for U1212A (continued)

### Frequency (AC coupling)

| Range     | Resolution | Accuracy  | Minimum frequency |
|-----------|------------|-----------|-------------------|
| 99.99 Hz  | 0.01 Hz    | 0.2 % + 3 | 10 Hz             |
| 999.9 Hz  | 0.1 Hz     |           |                   |
| 9.999 kHz | 0.001 kHz  |           |                   |
| 99.99 kHz | 0.01 kHz   |           |                   |
| 999.9 kHz | 0.1 kHz    |           |                   |

• *Overload protection: 1000 V*

### Sensitivity

| Frequency sensitivity                      |                              |                       |
|--|------------------------------|-----------------------|
| Range                                      | Minimum sensitivity (R.M.S.) |                       |
| Maximum input for specified accuracy of AC | 40 Hz~2 kHz                  | 10~40 Hz or 2~100 kHz |
| 400 V                                      | 6 V                          | 6 V                   |
| 1000 V                                     | 20 V                         | 30 V (< 10 kHz)       |
| 40 A                                       | 3 A (< 1 kHz)                | 3 A (< 1 kHz)         |
| 400 A                                      | 20 A (< 1 kHz)               | 20 A (< 1 kHz)        |
| 1000 A                                     | 50 A (1 kHz)                 | 50 A (< 1 kHz)        |

## Electrical Specifications for U1213A

Accuracy is given as  $\pm$  (% of reading + number of least significant digits) at  $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ , with relative humidity less than 80 % R.H.

AC voltage, AC current, AC+DC voltage, AC+DC current specifications are ac coupled, true R.M.S. and are valid from 5 % of range to 100 % of range. The crest factor may be up to 3.0 at full-scale except the 1000 V and 1000 A ranges where these are 1.5 at full scale. For non-sinusoidal waveforms, add (2 % reading + 2 % full scale) typical, for crest factors up to 3.

### DC voltage

| Range  | Resolution | Accuracy  | Overload protection |
|--------|------------|-----------|---------------------|
| 4 V    | 0.001 V    | 0.2 % + 5 | 1000 A R.M.S.       |
| 40 V   | 0.01 V     |           |                     |
| 400 V  | 0.1 V      |           |                     |
| 1000 V | 1 V        | 0.5 % + 3 |                     |

- Input impedance: 10 M $\Omega$  (nominal)

### AC voltage

| Range  | Resolution | Accuracy  |              | Overload protection |
|--------|------------|-----------|--------------|---------------------|
|        |            | 45~400 Hz | 400 Hz~2 kHz |                     |
| 4 V    | 0.001 V    | 1.0 % + 5 | 2.0 % + 5    | 1000 V R.M.S.       |
| 40 V   | 0.01 V     |           |              |                     |
| 400 V  | 0.1 V      |           |              |                     |
| 1000 V | 1 V        |           |              |                     |

- Input impedance: 10 M $\Omega$  (nominal) in parallel with < 100 pF

### AC+DC voltage

| Range  | Resolution | Accuracy  |              | Overload protection |
|--------|------------|-----------|--------------|---------------------|
|        |            | 45~400 Hz | 400 Hz~2 kHz |                     |
| 4 V    | 0.001 V    | 1.5 % + 9 | 2.5 % + 9    | 1000 V R.M.S.       |
| 40 V   | 0.01 V     |           |              |                     |
| 400 V  | 0.1 V      |           |              |                     |
| 1000 V | 1 V        |           |              |                     |

- Input impedance: 10 M $\Omega$  (nominal) in parallel with < 100 pF

### Voltage (1 ms peak hold)

| Range  | Resolution | Accuracy   | Overload protection |
|--------|------------|------------|---------------------|
| 4 V    | 0.001 V    | 1.0 % + 43 | 1000 V R.M.S.       |
| 40 V   | 0.01 V     |            |                     |
| 400 V  | 0.1 V      |            |                     |
| 1000 V | 1 V        |            |                     |

- Specified accuracy for changes > 1 ms in duration

## Electrical Specifications for U1213A (continued)

### Diode check/audible continuity test

| Range | Resolution | Accuracy  | Test current         | Open voltage |
|-------|------------|-----------|----------------------|--------------|
| Diode | 0.001 V    | 0.5 % + 2 | Approximately 0.8 mA | < +3.1 V     |

- *Overload protection: 1000 V R.M.S. for circuits < 0.3 A of short circuit current*
- *Built-in buzzer sounds when reading is below 50 mV approximately and single tone for normal forward-biased diode or semiconductor junction as  $0.3 V \leq \text{Reading} \leq 0.8 V$*

### Resistance

| Range          | Resolution       | Accuracy  | Test current |
|----------------|------------------|-----------|--------------|
| 400 $\Omega$   | 0.1 $\Omega$     | 0.3 % + 3 | 0.8 mA       |
| 4 k $\Omega$   | 0.001 k $\Omega$ |           | 80 $\mu$ A   |
| 40 k $\Omega$  | 0.01 k $\Omega$  |           | 8 $\mu$ A    |
| 400 k $\Omega$ | 0.1 k $\Omega$   |           | 727 nA       |
| 4 M $\Omega$   | 0.001 M $\Omega$ | 0.6 % + 3 | 112 nA       |
| 40 M $\Omega$  | 0.01 M $\Omega$  | 2.0 % + 5 | 112 nA       |

#### Notes:

1. *Overload protection: 1000 V R.M.S. for circuits < 0.3 A of short circuit current*
2. *Maximum open voltage: < +3.1 V*
3. *Instant continuity: Built-in buzzer sounds when resistance is less than 10.0  $\Omega$*
4. *The accuracy of 400  $\Omega$  and 4 k $\Omega$  is specified after Relative function, which is used to substrate the test lead resistance and the thermal effect*

### Capacitance

| Range        | Resolution    | Accuracy | Overload protection  |
|--------------|---------------|----------|--|
| 4 $\mu$ F    | 0.001 $\mu$ F | 1 % + 4  | 1000 V R.M.S. for circuits<br>< 0.3 A of short circuit current |
| 40 $\mu$ F   | 0.01 $\mu$ F  |          |  |
| 400 $\mu$ F  | 0.1 $\mu$ F   | 2 % + 4  |  |
| 4000 $\mu$ F | 1 $\mu$ F     | 3 % + 4  |  |

- *The accuracy is based on film capacitor or better and use Relative mode to zero residual value*

### DC current

| Range  | Resolution | Accuracy   | Maximum overload |
|--------|------------|------------|------------------|
| 40 A   | 0.01 A     | 1.5 % + 15 | 1000 A R.M.S.    |
| 400 A  | 0.1 A      | 1.5 % + 3  |                  |
| 1000 A | 1 A        | 2.0 % + 5  |                  |

- *Use Relative mode to zero residual offset*

## Electrical Specifications for U1213A (continued)

### AC current

| Range  | Resolution | Accuracy *N1 |             | Maximum overload |
|--------|------------|--------------|-------------|------------------|
|        |            | 45~65 Hz     | 65 Hz~1 KHz |                  |
| 40 A   | 0.01 A     | 2.0 % + 10   | 3.0 % + 10  | 1000 A R.M.S.    |
| 400 A  | 0.1 A      | 2.0 % + 5    | 3.0 % + 5   |                  |
| 1000 A | 1 A        | 2.0 % + 5    | 3.0 % + 5   |                  |

• N1: The maximum verification of current and frequency product is less than 400,000 A x Hz

### AC+DC current

| Range  | Resolution | Accuracy   |             | Maximum overload |
|--------|------------|------------|-------------|------------------|
|        |            | 45~65 Hz   | 65 Hz~1 kHz |                  |
| 40 A   | 0.01 A     | 3.5 % + 25 | 4.5 % + 25  | 1000 A R.M.S.    |
| 400 A  | 0.1 A      | 3.5 % + 9  | 4.5 % + 9   |                  |
| 1000 A | 1 A        | 4.5 % + 9  | 5.0 % + 9   |                  |

### Current (1 ms peak hold)

| Range  | Resolution | Accuracy   | Maximum overload |
|--------|------------|------------|------------------|
| 40 A   | 0.01 A     | 2.0 % + 70 | 1000 A R.M.S.    |
| 400 A  | 0.1 A      | 2.0 % + 43 |                  |
| 1000 A | 1 A        | 2.0 % + 43 |                  |

• Specified accuracy for changes > 1 ms in duration

### Temperature test

| Thermal type | Range         | Resolution | Accuracy   |
|--------------|---------------|------------|------------|
| K            | -200 ~ -40 °C | 0.1 °C     | 1 % + 3 °C |
|              | -40 ~ 1372 °C | 0.1 °C     | 1 % + 1 °C |
|              | -328 ~ -40 °F | 0.1 °F     | 1 % + 6 °F |
|              | -40 ~ 2502 °F | 0.1 °F     | 1 % + 2 °F |

Notes:

1. The accuracy does not include the tolerance of the thermocouple probe, and the meter must be operational for at least one hour
2. Do not allow the temperature sensor to contact a surface that is energized above 33 V R.M.S. or 70 V DC. Such voltages will pose a shock hazard.
3. The temperature calculation is according to the standard of EN/IEC-60548-1 and NIST175

## Electrical Specifications for U1213A (continued)

### Frequency (AC coupling)

| Range     | Resolution | Accuracy  | Minimum frequency |
|-----------|------------|-----------|-------------------|
| 99.99 Hz  | 0.01 Hz    | 0.2 % + 3 | 10 Hz             |
| 999.9 Hz  | 0.1 Hz     |           |                   |
| 9.999 kHz | 0.001 kHz  |           |                   |
| 99.99 kHz | 0.01 kHz   |           |                   |
| 999.9 kHz | 0.1 kHz    |           |                   |

• Overload protection: 1000 V; < 20,000,000 V x Hz

### Sensitivity

| Frequency sensitivity                      |                              |                  |
|--|------------------------------|------------------|
| Range                                      | Minimum sensitivity (R.M.S.) |                  |
| Maximum input for specified accuracy of AC | 45 Hz~2 kHz                  | 10 Hz~200 kHz    |
| 4 V  | 0.3 V                        | 0.6 V            |
| 40 V                                       | 2 V                          | 3 V              |
| 400 V                                      | 20 V                         | 30 V (< 100 kHz) |
| 1000 V                                     | 50 V                         | 50 V (< 10 kHz)  |
| 40 A                                       | 3 A (< 1 kHz)                | 3 A (< 1 kHz)    |
| 400 A                                      | 20 A (< 1 kHz)               | 20 A (< 1 kHz)   |
| 1000 A                                     | 50 A (< 1 kHz)               | 50 A (< 1 kHz)   |

### Duty cycle

| Mode        | Range        | Accuracy of full scale |
|-------------|--------------|------------------------|
| AC coupling | 0.1 %~99.9 % | 0.3 % per kHz + 0.3 %  |

Notes:

1. The accuracy for duty cycle is based on a 4 V square wave input to the DC 4 V range and maximum frequency up to 2 kHz. The duty cycle range can be measured within 5 %~95 % as the signal frequency > 20 Hz.

# Ordering Information

## Standard shipped accessories

- Test leads
- 4-mm probes
- Soft carrying case
- Quick Start Guide
- Certificate of Calibration (CoC)

## Optional accessories

U1168A



Standard test lead kit

U1162A



Alligator clips

U1175A



Soft carrying case

U1186A



K-type thermocouple and adapter

U1177A



Infrared (IR)-to-Bluetooth Adapter



## Did you know?

Ensure that the clamp meter measures only one conductor at a time. Measuring multiple conductors may cause inaccuracy in measurement reading due to vector sum of the currents flowing in the conductors.



**myAgilent**

[www.agilent.com/find/myagilent](http://www.agilent.com/find/myagilent)

A personalized view into the information most relevant to you.



[www.lxistandard.org](http://www.lxistandard.org)

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.

### Agilent Channel Partners

[www.agilent.com/find/channelpartners](http://www.agilent.com/find/channelpartners)

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

[www.agilent.com/find/advantageservices](http://www.agilent.com/find/advantageservices)



[www.agilent.com/quality](http://www.agilent.com/quality)

[www.agilent.com](http://www.agilent.com)  
[www.agilent.com/find/clampmeter](http://www.agilent.com/find/clampmeter)

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Americas

|               |                |
|---------------|----------------|
| Canada        | (877) 894 4414 |
| Brazil        | (11) 4197 3600 |
| Mexico        | 01800 5064 800 |
| United States | (800) 829 4444 |

### Asia Pacific

|                    |                |
|--------------------|----------------|
| Australia          | 1 800 629 485  |
| China              | 800 810 0189   |
| Hong Kong          | 800 938 693    |
| India              | 1 800 112 929  |
| Japan              | 0120 (421) 345 |
| Korea              | 080 769 0800   |
| Malaysia           | 1 800 888 848  |
| Singapore          | 1 800 375 8100 |
| Taiwan             | 0800 047 866   |
| Other AP Countries | (65) 375 8100  |

### Europe & Middle East

|                |                      |
|----------------|----------------------|
| Belgium        | 32 (0) 2 404 93 40   |
| Denmark        | 45 45 80 12 15       |
| Finland        | 358 (0) 10 855 2100  |
| France         | 0825 010 700*        |
|                | *0.125 €/minute      |
| Germany        | 49 (0) 7031 464 6333 |
| Ireland        | 1890 924 204         |
| Israel         | 972-3-9288-504/544   |
| Italy          | 39 02 92 60 8484     |
| Netherlands    | 31 (0) 20 547 2111   |
| Spain          | 34 (91) 631 3300     |
| Sweden         | 0200-88 22 55        |
| United Kingdom | 44 (0) 118 927 6201  |

For other unlisted countries:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

Revised: October 11, 2012

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012  
Published in USA, October 31, 2012  
5990-5083EN

Bluetooth and the Bluetooth logo are registered trademarks owned by Bluetooth SIG, Inc., U.S.A. and licensed to Agilent Technologies, Inc.



**Agilent Technologies**