


# Agilent E6234A VXI Pentium® PC Controller 166 MHz/32 MB

## Data Sheet

- 2-Slot, C-size, message-based PC controller
- 166 MHz Intel Pentium® Processor
- SICL/VISA support
- Upgrade memory using standard SODIMMS
- VXI *plug&play*-compatible with Win 95/NT
- Additional I/O interfaces available

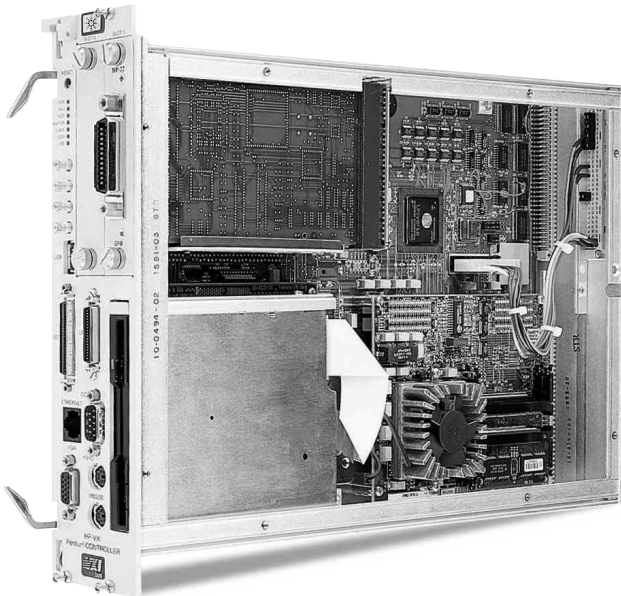

Agilent E6234A

### Description

The Agilent E6234A is a **C-size, 2-slot, message-based, PC controller** and can be used in either the Agilent E84XX series mainframes, the E1401B or the E1421B Mainframe. Embedding the controller in the VXI chassis allows direct computer access of other VXI devices, system memory, and triggers as though they were part of the controller hardware. Therefore, you don't need a separate command module.

The E6234A accesses the VXIbus with a full 32-bit wide data path (D32) for highest performance. For an alternative data path into and out of your VXI system, LAN connection is standard on this module. It has one additional EXM slot for inclusion of an additional interface that can be ordered separately.

This product includes a 166 MHz processor, 2.16 GB disk, 3.5" floppy drive, 32 MB RAM, SCSI-2, RS-232, GPIB, ECP parallel port, SVGA I/F with 2 MB VRAM, two PS-2 ports, and one EXM expansion slot.

**Note:** This product uses a notebook-style 2.5" hard drive intended for low-usage operation. Applications that require frequent (more than once per minute) disk read/writes continuously over long periods may cause premature failure of the hard disk. For these applications, you should consider using an external SCSI hard drive, either a standalone drive or a VXI disk module such as the E3249B.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

## Product Specifications

<b>Processor:</b>	Intel Pentium®
<b>Clock speed:</b>	166 MHz
<b>Main memory:</b>	32-128 MB
<b>Built-in interfaces:</b>	Two PS-2 ports SVGA w/2 MB Video RAM RS-232 LAN GPIB ECP Parallel SCSI-2 USB Trigger I/O Clock I/O
<b>Additional interfaces:</b>	GPIB 2-channel RS-232 Thick/thin LAN
<b>Expansion slots:</b>	1 EXM additional
<b>Graphics support:</b>	Color 640 x 480 800 x 600 1024 x 768 1280 x1 024
<b>Internal mass storage:</b>	2.16 GB Hard Drive 3.5-in. floppy
<b>O.S. (earliest supported):</b>	Windows 95 Windows NT 4.0

## Environmental Specifications

<b>EMC specifications:</b>	Meets CISPR 11, 1990/EN 55011 (1991): Group 1, Class A
<b>Shock:</b>	
<b>Operating:</b>	30 g 11 ms, half sine pulse
<b>Non-operating:</b>	50 g 11 ms, half sine pulse
<b>Vibration:</b>	
<b>Operating:</b>	2.5 g acceleration over 5-300 Hz sine wave (P-P), 1 oct/min sine sweep
<b>Non-operating:</b>	5 g acceleration over 5-300 Hz sine wave (P-P), 1 oct/min sine sweep
<b>Environmental-temperature:</b>	
<b>Operating:</b>	5 to 45 °C derated 2 °C per 1000 ft (300 m) over 6600 ft (2000 m)
<b>Non-operating:</b>	-40 to 65 °C (HDD limits)
<b>Environmental-max. altitude:</b>	
<b>Operating:</b>	10,000 ft (3,000 m)
<b>Non-operating:</b>	40,000 ft (12,000 m)
<b>Environmental-rel. humidity:</b>	
<b>Operating:</b>	8-90% non-condensing
<b>Non-operating:</b>	5-95% non-condensing

## VXI Characteristics

<b>VXI device type:</b>	Message-based controller
<b>Size:</b>	C
<b>Slots:</b>	2
<b>Connectors:</b>	P1/2
<b>Shared memory:</b>	n/a
<b>VXI busses:</b>	TTL Trigger Bus ECL Trigger Bus
<b>C-size compatibility:</b>	n/a

## Module Current

	I <sub>PM</sub>	I <sub>DM</sub>
+5 V:	11 A	0.02 A
+12 V:	40.2 mA	0.01 A
-12 V:	2.4 mA	0.01 A
+24 V:	—	—
-24 V:	—	—
-5.2 V:	335 mA	0.001 A
-2 V:	120 mA	0.006 A

## Cooling/Slot

<b>Watts/slot:</b>	29
<b>ΔP mm H<sub>2</sub>O:</b>	0.14
<b>Air Flow liter/s:</b>	5.6

## Ordering Information

Description	Product No.
VXI Pentium® PC Controller - 166MHz/32MB	E6234A*
Windows 95 Development Bundle	E6234A 001
Windows NT Development Bundle	E6234A 002
Mini Cable Adapter for Printers	E6234A 003
16 Mbytes Additional RAM	E6245A
32 Mbytes Additional RAM	E6246A
Additional AUI/ThinLAN/10baseT Interface	RADIS-00724
Additional GPIB Interface	RADIS-00848
Additional 2-Channel RS-232 Interface	RADIS-00849

\*Note: You must specify either Opt. 001 or Opt. 002 when ordering.

## Related Literature

*2000 Test System and VXI Catalog CD-ROM,*  
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

*2000 Test System and VXI Catalog,*  
Agilent Pub. No. 5980-0307E (overview of VXI products )

*1998 Test System and VXI Products Data Book,*  
Agilent Pub. No. 5966-2812E

## Online

Internet access for Agilent product information, services and support  
[www.agilent.com/find/tmdir](http://www.agilent.com/find/tmdir)

VXI product information  
[www.agilent.com/find/vxi](http://www.agilent.com/find/vxi)

Defense Electronics Applications  
[www.agilent.com/find/defense\\_ATE](http://www.agilent.com/find/defense_ATE)

Agilent Technologies VXI Channel Partners  
[www.agilent.com/find/vxichanpart](http://www.agilent.com/find/vxichanpart)

Agilent Technologies' HP VEE Application Website  
[www.agilent.com/find/vee](http://www.agilent.com/find/vee)

Agilent Technologies Data Acquisition and Control Website  
[www.agilent.com/find/data\\_acq](http://www.agilent.com/find/data_acq)

Agilent Technologies Instrument Driver Downloads  
[www.agilent.com/find/inst\\_drivers](http://www.agilent.com/find/inst_drivers)

Agilent Technologies Electronics Manufacturing Test Solutions  
[www.agilent.com/go/manufacturing](http://www.agilent.com/go/manufacturing)

**Get assistance with all your test and measurement needs at**

**[www.agilent.com/find/assist](http://www.agilent.com/find/assist)**

**or check your local phone book for the Agilent office near you.**

## Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources ([www.agilent.com](http://www.agilent.com)).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

## Phone or Fax

### United States:

(tel) 1 800 829 4444

### Canada:

(tel) 1 877 894 4414

(fax) (905) 282 6495

### China:

(tel) 800 810 0189

(fax) 800 820 2816

### Europe:

(tel) (31 20) 547 2323

(fax) (31 20) 547 2390

### Japan:

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

### Korea:

(tel) (82 2) 2004 5004

(fax) (82 2) 2004 5115

### Latin America:

(tel) (305) 269 7500

(fax) (305) 269 7599

### Taiwan:

(tel) 0800 047 866

(fax) 0800 286 331

### Other Asia Pacific Countries:

(tel) (65) 6375 8100

(fax) (65) 6836 0252

(e-mail) [tm\\_asia@agilent.com](mailto:tm_asia@agilent.com)

Data Subject to Change

© Agilent Technologies, Inc. 2000

Printed in the U.S.A. May 1, 2004

5966-3078E



**Agilent Technologies**