


Specification for monolithic crystal filter:

MQF 10.7-1400/12

1. General

1.1. Case:

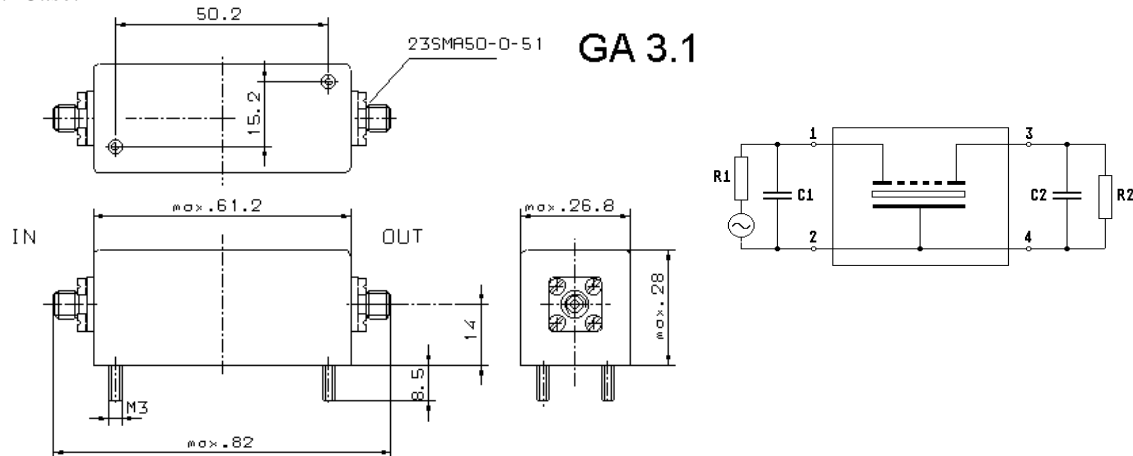

- | | |
|-----------------------------------|------------------|
| 1.2. Type name: | MQF 10.7-1400/12 |
| 1.3. Number of poles: | 12 |
| 1.4. Operating temperature range: | -20°C to +70°C |
| 1.5. Storage temperature range: | -45°C to +85°C |

2. Electric values

- | | |
|---|---|
| 2.1. Nominal centre frequency f_0 : | 10.7 MHz |
| 2.2. Pass band | |
| 2.2.1. Pass band at 6 dB-frequencies (at +25°C): | $f_0 - 7.0 \text{ kHz} \pm 100 \text{ Hz}$
$f_0 + 7.0 \text{ kHz} \pm 3.0 \text{ kHz}$ |
| 2.2.2. Ripple: | < 2.0 dB at $f_0 - 4.0 \text{ kHz} \dots f_0 + 1.0 \text{ kHz}$ |
| 2.2.3. Insertion loss:
(measured on smallest attenuation in pass band) | < 3.5 dB |
| 2.3. Stop band | |
| 2.3.1. $f_0 - 8.25 \text{ kHz} / f_0 + 11.25 \text{ kHz}$ | $\geq 26 \text{ dB}$ |
| 2.3.2. $f_0 - 12.25 \text{ kHz} / f_0 + 15.25 \text{ kHz}$ | $\geq 90 \text{ dB}$ |
| 2.3.3. Alternate attenuation: | $\geq 90 \text{ dB}$ |
| 2.4. Terminating impedance (input and output): | $50 \Omega // 0 \text{ pF}$ |
| 2.5. Typical input power level: | 0 dBm |
| 2.6. Maximum input power level: | +15 dBm |
| 3. Marking on the case: | firm, year week
MQF 10.7-1400/12 |
| 4. Environment conditions: | Corresponding to Telefilter CF001 |

Edited by: _____ date: _____ name: _____