

# TC0902

SMD Telecoil 9x1.5x2 mm (260 mH - 340 mH)

## Main characteristics

- Small size
- High sensitivity
- SMD mounting


## Typical application

- Hearing aid devices



This new design is coil with a very stable and high quality ferrite core and tiny size (9 x 1.5 x 2 mm) and high sensitivity in low frequency range (20-40kHz). Those pieces are winding with thin copper wire up to 12 $\mu$ m and its inductances range is 260-340 mH. Besides, it has good frequency and temperature behaviour and can be served with “custom” electrics characteristics according requirements of hearing aid devices manufacturers.

## Dimensions and recommended pad-layout:

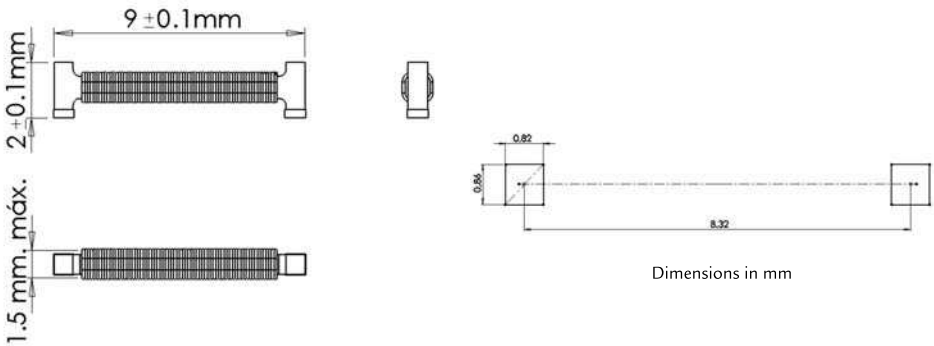

## Electrical specifications

| P/N           | L (mH) @ 20 kHz | Tolerance | Rdc (k $\Omega$ ) | Sensitivity (mVpp/App/m) @1 kHz |
|---------------|-----------------|-----------|-------------------|---------------------------------|
| TC0902-26000J | 260             | ±5%       | 1.2               | 1.80                            |
| TC0902-34000J | 340             | ±5%       | 1.4               | 2.10                            |

Add under the chart: This chart is a reference guide for the most common required values at working frequency of 20 kHz. Any other inductance value at LF or tighter tolerances can be provided. Please contact our sales department for any inquiry. Sensitivity measured with Helmholtz coils H=6.34 App/m @1 kHz. Contact us for measurement specification. Metallization: Ag(Base)/Ni(inter)/Sn(Finish)