

ISOLATED DC/DC CONVERTERS

36 - 75 Vdc Input 12 Vdc /8 A Output



0RQ1-C5T12x RoHS Compliant PRELIMINARY Rev.A

- Isolated
- Fixed Frequency (300 kHz)
- High Efficiency
- High Power Density
- Input Under/Over Voltage Lockout
- Output Voltage Trim
- Positive/Negative Remote Sense
- Low Cost
- Output Over-Voltage Shutdown
- Over Temperature Protection
- SCP/OCP
- Remote On/Off
- Basic Isolation

Description

The 0RQ1-C5T12x is an isolated dc/dc converter that operates from a nominal 48 Vdc source. This unit will provide up to 100 W of output power from a nominal 48 Vdc input. This unit is designed to be highly efficient and low cost. Features include remote on/off, over current protection and under-voltage lockout. This converter is provided in an industry standard quarter brick package.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active High	Model Number Active Low
12 Vdc	36 Vdc - 75 Vdc	8 A	100 W	92%	0RQ1-C5T12A	0RQ1-C5T12B

- Notes:** 1. Add "G" suffix at the end of the model number to indicate Tray Packaging.
2. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Continuous Input Voltage	-0.3 V	-	80 V	
Transient Input Voltage (100ms)	-0.3 V	-	100 V	
Remote On/Off	-0.3 V	-	18 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

Note: All specifications are typical at 25 °C unless otherwise stated.

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	36 V	48 V	75 V	
Input Current (full load)	-	-	3.2 A	
Input Current (no load)	-	60 mA	80 mA	
Remote Off Input Current	-	10 mA	20 mA	
Input Reflected Ripple Current (pk-pk)	-	10 mA	20 mA	With simulated source impedance of 10 uH, 5 Hz to 20 MHz; use a 100 uF/100 V electrolytic capacitor with ESR = 1 ohm max at 200 kHz
Input Reflected Ripple Current (rms)	-	2 mA	5 mA	
I ² t Inrush Current Transient	-	0.05 A ² s	0.1 A ² s	
Turn-on Voltage Threshold	33 V	34 V	35 V	
Turn-off Voltage Threshold	31 V	32 V	33 V	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

ISOLATED DC/DC CONVERTERS

36 - 75 Vdc Input 12 Vdc /8 A Output



Output Specifications

Parameter	Min	Typ	Max	Notes		
Output Voltage Set Point	11.76 V	12 V	12.24 V	V _{in} =48 V, full load		
Load Regulation	-	±10 mV	±20 mV			
Line Regulation	-	±10 mV	±20 mV			
Regulation Over Temperature (-40deg.C-85deg.C)	-	±0.01%Vo/C	±0.02%Vo/C			
Output Current Range	0 A	-	8 A			
Output DC Current Limit	9.6 A	10.8 A	12 A			
Ripple and Noise (rms)	-	30 mV	50 mV	0-20MHz BW, with a 1µF ceramic capacitor and a 10µF tantalum capacitor at output		
Ripple and Noise (pk-pk)	-	100 mV	150 mV			
Short Circuit Surge Transient	-	3 A ² s	5 A ² s			
Turn on time		15 mS	25 mS			
Overshoot at Turn on	-	0%	3%			
Output Capacitance	0 uF	-	1200 uF			
Transient Response						
50% ~ 75% Max Load	Overshoot	V _O =12 V	-	300 mV	480 mV	di/dt=0.1A/us, V _{in} =48 Vdc, T _a =25 °C, with a 1µF ceramic capacitor and a 10uF Tantalum cap at output.
	Settling Time		-	120 uS	250 uS	
75% ~ 50% Max Load	Overshoot		-	300 mV	480 mV	
	Settling Time		-	120 uS	250 uS	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency	90%	92%	-	V _{in} =48 V, full load
Switching Frequency	290 kHz	300 kHz	310 kHz	
Isolation Capacitance	-	1500 pF	-	
Input to Output Isolation Voltage	-	-	1500 V	
Output Voltage Protection	-	130%Vo	-	V _{in} =48 V, full load, in hiccup mode
Remote Sense Compensation	-	-	10%Vo	The total voltage increased by trim and remote sense should not exceed 10%Vo.
Output Voltage Trim Range	80%Vo	-	110%Vo	
Over Temperature Protection	-	125 °C	-	
MTBF	TBD			Calculated Per Bell Core SR-332 (V _{in} =48 V, I _o =normal, T _a = 25 °C)
Dimensions	Inches millimeters			
	2.34 x 1.51 x 0.63 59.49 x 38.40 x 16.06			
Weight	-	TBD	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

ISOLATED DC/DC CONVERTERS

36 - 75 Vdc Input 12 Vdc /8 A Output




Control Specifications

Parameter		Min	Typ	Max	Notes
Remote On/Off					
Signal Low (Unit On)	Active Low	-0.3 V	-	0.8 V	The remote on/off pin open, Unit Off.
Signal High (Unit Off)		3.5 V	-	18 V	
Signal Low (Unit Off)	Active High	-0.3 V	-	0.8 V	The remote on/off pin open, Unit On.
Signal High (Unit On)		3.5 V	-	18 V	
Current Sink		0 mA	-	5 mA	


Output Trim Equations

Equations for calculating the trim resistor are shown below. The Trim Down resistor should be connected between the Trim pin, GND pin and -sense pin. The Trim Up resistor should be connected between the Trim pin, Vout pin and the +sense pin. Only one of the resistors should be used for any given application.

$$R_{trim_up} = \frac{(100 + \delta) \cdot V_o \cdot 5.11 - 626}{1.225 \cdot \delta} - 10.22 [k\Omega]$$

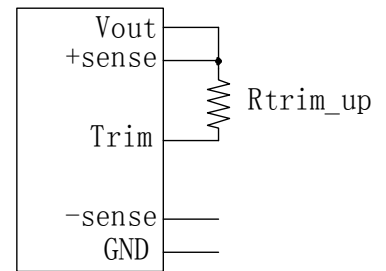

$$R_{trim_down} = \frac{511}{|\delta|} - 10.22 [k\Omega]$$

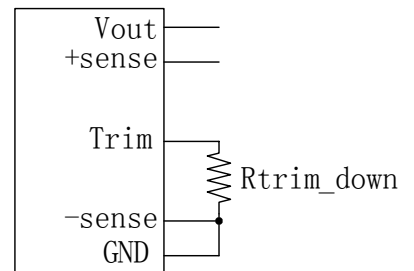

Note:

$$\delta = \frac{(V_{adj} - V_o)}{V_o} \times 100 [\%]$$


V_{adj} is the desired output voltage
V_o = 12V @I_{out}=0

ISOLATED DC/DC CONVERTERS

36 - 75 Vdc Input 12 Vdc /8 A Output



Mechanical Outline

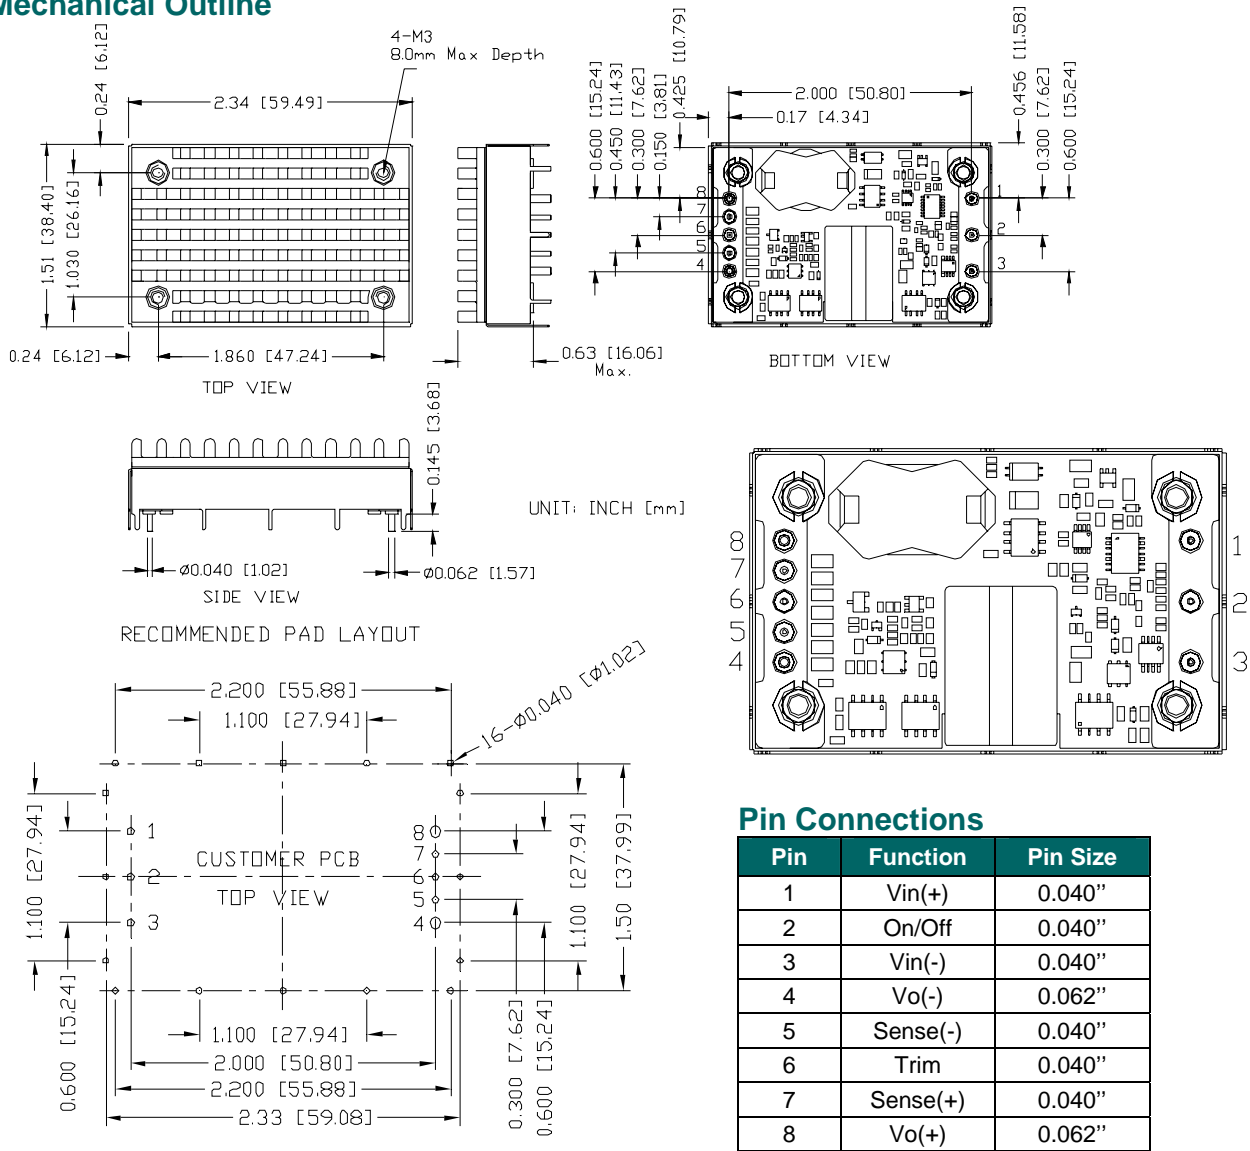

Pin Connections

Pin	Function	Pin Size
1	Vin(+)	0.040"
2	On/Off	0.040"
3	Vin(-)	0.040"
4	Vo(-)	0.062"
5	Sense(-)	0.040"
6	Trim	0.040"
7	Sense(+)	0.040"
8	Vo(+)	0.062"

Notes: 1. Pin 5 must be connected to Vo(-).
2. Pin 7 must be connected to Vo(+).

1,2,3,5,6,7 ϕ 0.047 HOLE SIZE, ϕ 0.08 min PAD SIZE
4,9 ϕ 0.07 HOLE SIZE, ϕ 0.10 min PAD SIZE

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2008 Bel Fuse Inc. Specifications subject to change without notice. 091908

CORPORATE

Bel Fuse Inc.
 206 Van Vorst Street
 Jersey City, NJ 07302
 Tel 201-432-0463
 Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
 8F/ 8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel 852-2328-5515
 Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Suite G7, Preston
 Lancashire, PR1 8UD, U.K.
 Tel 44-1772-556601
 Fax 44-1772-888366
www.belfuse.com