



Helping Customers Innovate, Improve & Grow



PX-702



PX-570



PX-420

Vectron offers a High Temperature Low Power Real Time Clock Crystal Oscillator (HT RTC XO) product platform for extreme environment applications. Comparing with traditional RTC solution with 32.768KHz tuning fork resonator design, Vectron HT RTC XO solution provides unsurpassed reliability with long lifetime at elevated temperature and exceptional temperature stability performance for high temperature, high shock & vibration applications.

Vectron HT RTC XO product portfolio includes three industrial standard package footprints 5x7mm SMD, 8x8.5mm leaded and ½ DIL, for satisfying both through-hole mount and surface mount requirements.


Features

- Output frequency 32.768kHz
- Continuous operating temperature range -55°C to 200°C
- 2.5 to 3.6 V operation
- Design for high shock & vibration
- Offer three standard product footprints
- Product is free of lead and compliant to EC RoHS directive 

Applications

- Oil / Gas downhole tool
- Geophysical services
- High temperature industrial process control
- Extended temperature Military/Aerospace
- Avionics
- Engine control

Block Diagram

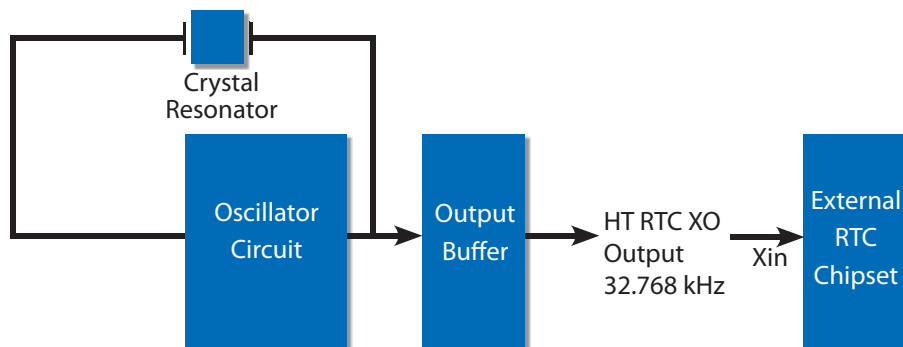

Performance Specifications


	PX-702	PX-570	PX-420
Specification Parameters	Values		
Frequency	32.768 kHz		
Supply (Vdd)	+2.5V to +3.6V		
Current	0.45mA typical @ 3.3V 0.25mA typical @ 2.5V		
Output	HCMOS Compatible		
Symmetry	45/55%		
Operating Temperature	-55°C to +200°C *Please refer to ordering information for additional temperature ranges		
Temperature Stability	±250ppm *Please refer to ordering information for additional temperature stability specifications		
Package Size	5 x 7mm SMD HTCC	8 x 8.5mm Leaded HTCC	0.5" x 0.5" x 0.2" 1/2 DIL Metal
Storage Temperature	-55°C to +125°C		
Shock	3000g, 0.3ms	1000g, 0.5ms	1000g, 0.5ms
Vibration, Sine	30g, 10 to 2kHz	20g, 10 to 2kHz	20g, 10 to 2kHz
Vibration, Random	30grms, 10 to 2kHz	20grms, 10 to 2kHz	20grms, 10 to 2kHz

Environmental Compliance		
Vibration-Sine	See specification table	MIL-STD-202 Method 204
Vibration-Random	See specification table	MIL-STD-202 Method 214
Shock	See specification table	MIL-STD-202 Method 213
Seal Test	Fine	MIL-STD-883 Method 1014 Condition A2
Seal Test	Gross	MIL-STD-202 Method 112 Condition D
Temperature Cycling	10 Cycles minimum	MIL-STD-883 Method 1010 Condition B
Acceleration	5000g Y1 axis	MIL-STD-883 Method 2001 Condition A

Physical Specifications and Marking




PX-702

Dimensions in (mm)

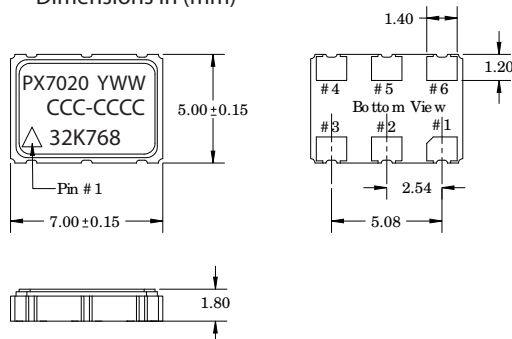



Pin	Function
1	Enable/Disable option
2	No Connection
3	Case & Electrical Ground
4	RF Output
5	No Connection
6	V _{CC} Power Supply Voltage

Dimensions in (mm)

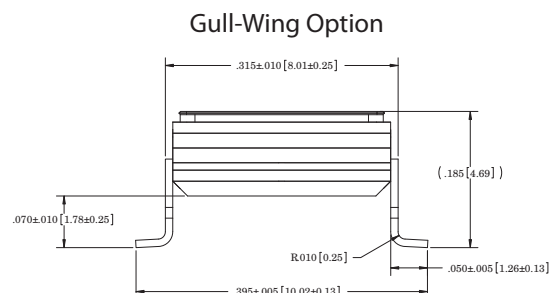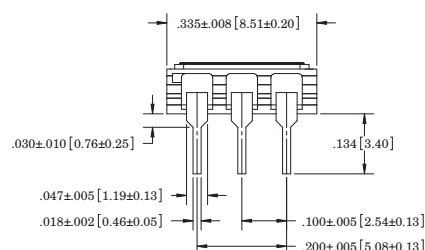


Pin	Function
1	Enable/Disable option
2	No Connection
3	Case & Electrical Ground
4	RF Output
5	No Connection
6	V _{CC} Power Supply Voltage


Dimensions in (inches)

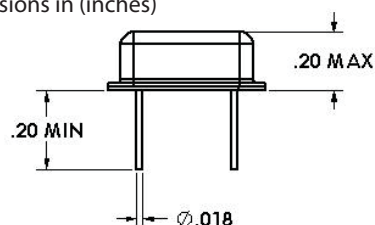


Pin	Function
1	Enable/Disable option
2	Case & Electrical Ground
3	RF Output
4	V _{CC} Power Supply Voltage

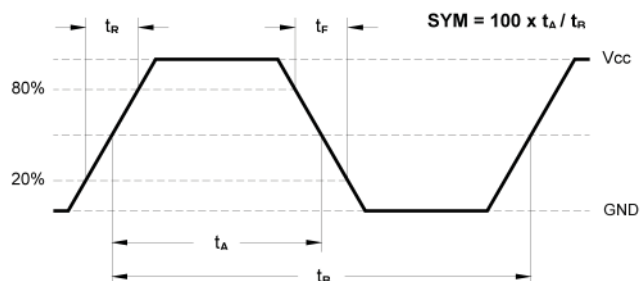


Test Circuit

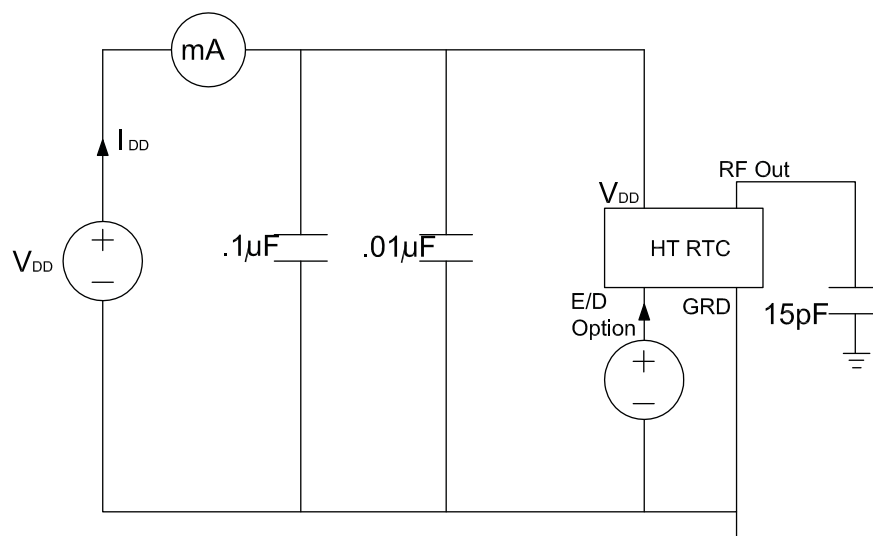

Temperature Stability Performance

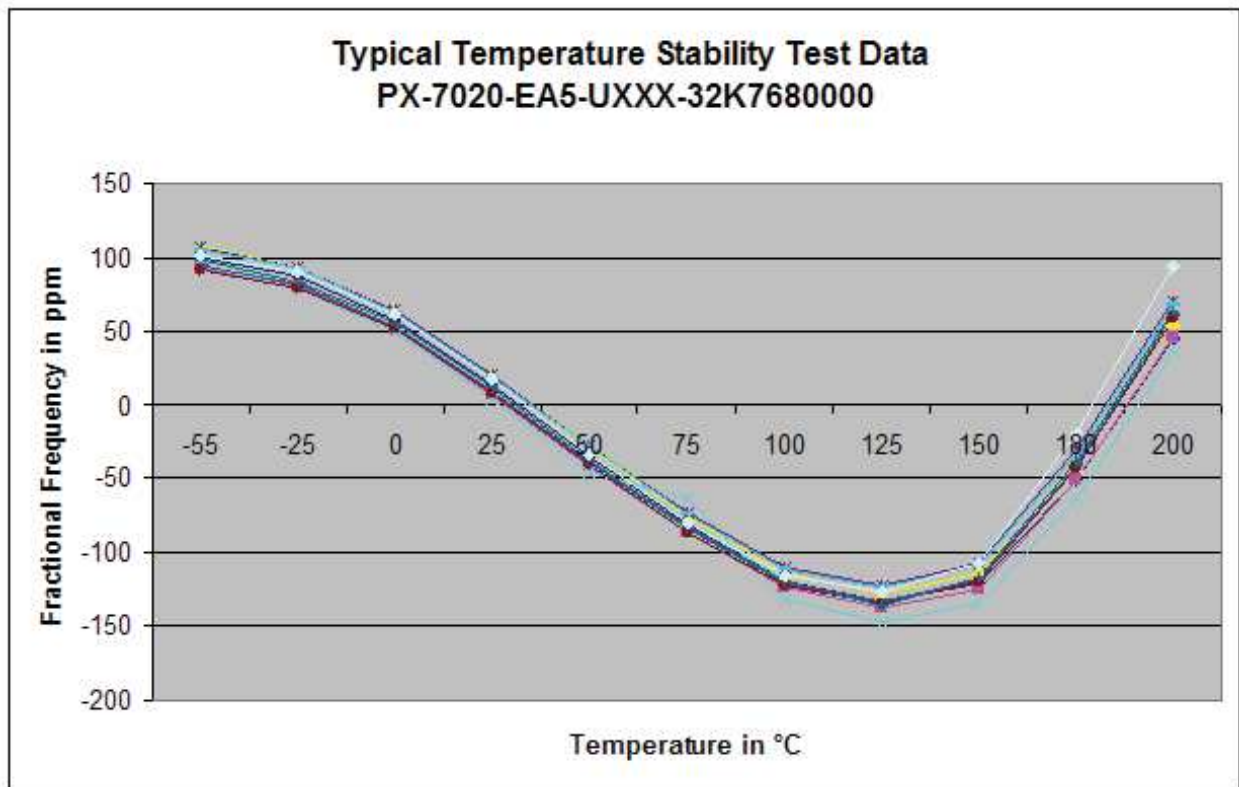

Current Consumption Performance

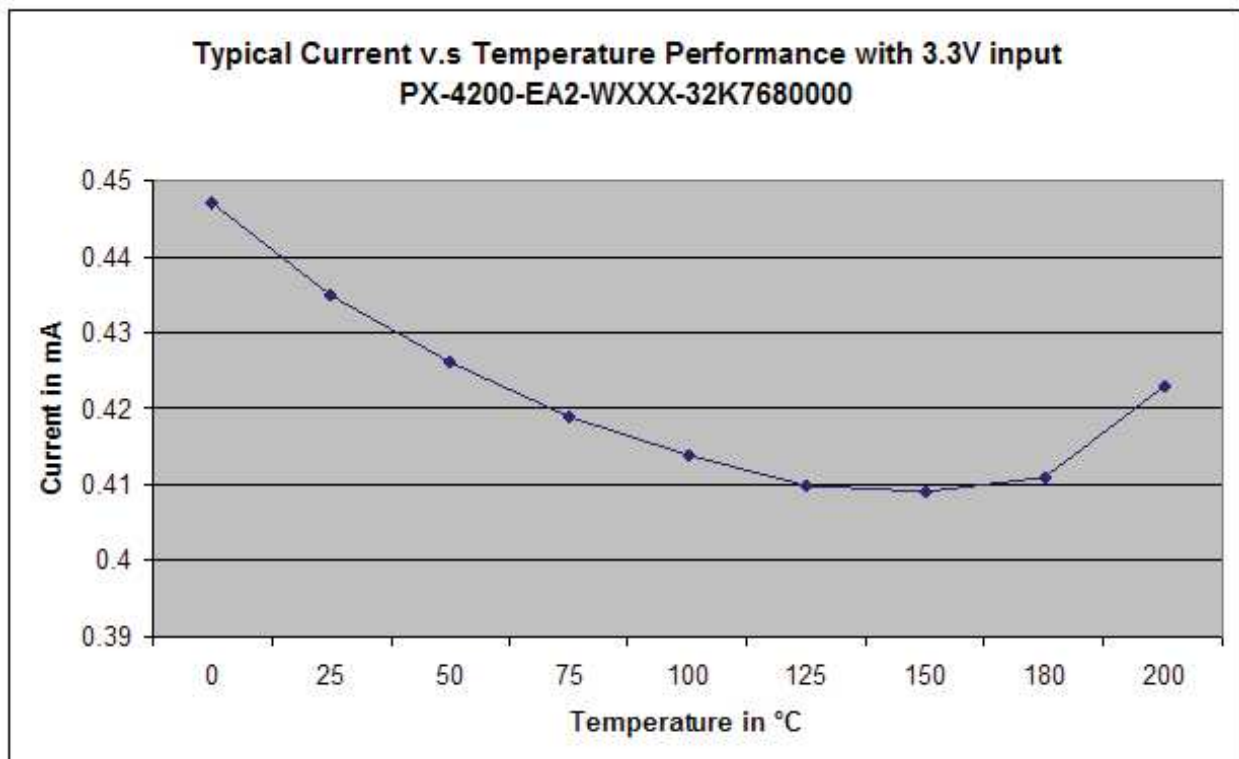

Ordering Information

PX - 7020 - E A 2 - W X X X - 32K7680000

Product Family
Crystal Oscillator

Package Type
7020: 5x7 mm SMD
5701: 8x9 mm Thru-Hole
5702: 8x9 mm Gull-Wing
4200: 4 Pin 1/2 DIP

Supply Voltage
E: 3.3V $\pm 5\%$
H: 2.5V $\pm 5\%$

Output
A: HCMOS/ACMOS

Frequency

Factory Use

Factory Use

Enable
A: Enable Hi, Tristate
X: No Enable

Temp Stability (PX)
U: ± 150 ppm
W: ± 250 ppm
J: ± 40 ppm
S: ± 100 ppm

Temperature Range
1: 0°C to 150°C
Z: -20°C to 180°C
2: 0°C to 200°C
5: -55°C to 200°C

Temperature Range and Stability Selection Table

Temp Range	Temp Stability	PX-702	PX-570	PX-420
1: 0°C to 150°C	J: ± 40 ppm		X	X
	S: ± 100 ppm	X	X	X
	U: ± 150 ppm	X	X	X
	W: ± 250 ppm	X	X	X
Z: -20°C to 180°C	J: ± 40 ppm		X	X
	S: ± 100 ppm		X	X
	U: ± 150 ppm	X	X	X
	W: ± 250 ppm	X	X	X
2: 0°C to 200°C	J: ± 40 ppm			
	S: ± 100 ppm		X	X
	U: ± 150 ppm	X	X	X
	W: ± 250 ppm	X	X	X
5: -55°C to 200°C	J: ± 40 ppm			
	S: ± 100 ppm		X	X
	U: ± 150 ppm	X	X	X
	W: ± 250 ppm	X	X	X

*Contact factory for custom requirements

For Additional Information, Please Contact

USA:

Vectron International
267 Lowell Road
Hudson, NH 03051
Tel: 1.888.328.7661
Fax: 1.888.329.8328

Europe:

Vectron International
Landstrasse, D-74924
Neckarbischofsheim, Germany
Tel: +49 (0) 3328.4784.17
Fax: +49 (0) 3328.4784.30

Asia:

Vectron International
1589 Century Avenue, the 19th Floor
Chamtime International Financial Center
Shanghai, China
Tel: 86.21.60812888
Fax: 86.21.61633598

Disclaimer

Vectron International reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Rev: 11/2008