

NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input

0.6 Vdc - 5.0 Vdc/40 A Output

bel
POWER PRODUCTS

VRP2-40E1AQ

RoHS Compliant

Rev.B

- Non-Isolated
- High Efficiency
- Fixed Switching Frequency
- Low Cost
- Excellent Thermal Performance
- Wide Input Voltage Range
- Wide Output Trim Range
- Output Over-Voltage Shutdown
- OCP/SCP
- Low Output Ripple
- Power Good Signal
- Remote On/Off



Description

The VRP2-40E1AQ is a non-isolated dc/dc converter that operates over a wide range of input voltage ($V_{in} = 5 \text{ Vdc} - 13.8 \text{ Vdc}$). This unit can provide a precisely regulated output voltage from 0.6 Vdc to 5.0 Vdc and can deliver up to 40 A of output current. This unit is designed to be highly efficient and low cost. The converter is provided in an industry standard package.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency ($V_o=1.8 \text{ Vdc}$)	Part Number Vertical Mount
0.6 Vdc - 5.0 Vdc	5.0 Vdc - 13.8 Vdc	40 A	200 W	87%	VRP2-40E1AQ

Notes: 1. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.
2. Add "G" suffix at the end of the model numbers listed above to indicate "Tray Packaging".

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	15 V	
Output Enable Terminal Voltage	-0.3 V	-	15 V	
Ambient Temperature	0 °C	-	70 °C	
Storage Temperature	-55 °C	-	125 °C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage				
$V_o \leq 2.8 \text{ V}$	5 V	12 V	13.8 V	
$V_o > 2.8 \text{ V}$	$1.8 \cdot V_o$	12 V	13.8 V	
Input Current (full load)	-	-	30 A	
Input Reflected Ripple Current (pk-pk)	-	35 mA	-	With simulated source impedance of 1 μH , 5 Hz to 20 MHz. Use a 1000 μF /16 V electrolytic capacitor with ESR=0.1 ohm max, at 100 kHz at 25°C.
Input Reflected Ripple Current (rms)	-	10 mA	-	
I^2t Inrush Current Transient	-	-	1 A ² s	
Turn-on Voltage Threshold	4.4 V	4.6 V	4.8 V	
Under Voltage Threshold	4.0 V	4.3 V	4.6 V	

Note: All specifications are typical at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input

0.6 Vdc - 5.0 Vdc/40 A Output



Output Specifications

Parameter		Min	Typ	Max	Notes
Output Voltage Set Point	$V_o \geq 1\text{ V}$ $V_o < 1\text{ V}$	-1.5 % V_o -10 mV	- -	+1.5 % V_o +10 mV	$V_{in}=V_{inmin}$, $I_o=I_{omax}$
Load Regulation	$V_o \geq 2.5\text{ V}$ $V_o < 2.5\text{ V}$	- -	- -	0.6% V_o 12 mV	
Line Regulation	$V_o \geq 2.5\text{ V}$ $V_o < 2.5\text{ V}$	- -	- -	0.3% V_o 9 mV	
Regulation Over Temperature (0 °C to +70 °C)		-	-	0.02% V_o /C	
Output Current		0 A	-	40 A	
Current Limit Threshold		105% I_o	130% I_o	160% I_o	
Output Ripple and Noise (pk-pk)	$V_o=5.0\text{ V}$ $V_o=3.3\text{ V}$ $V_o=2.5\text{ V}$ $V_o=1.5\text{ V}$ $V_o=1.0\text{ V}$ $V_o=0.6\text{ V}$	- - - - - -	- - - - - -	120 mV 60 mV 40 mV 40 mV 30 mV 30 mV	Test conditions: 0-20MHz BW, with a 1μF ceramic capacitor and a 10 uF Tantalum cap at output.
Output Ripple and Noise (rms)	$V_o=5.0\text{ V}$ $V_o=3.3\text{ V}$ $V_o=2.5\text{ V}$ $V_o=1.5\text{ V}$ $V_o=1.0\text{ V}$ $V_o=0.6\text{ V}$	- - - - - -	- - - - - -	30 mV 30 mV 20 mV 20 mV 15 mV 15 mV	
Turn On Time		-	-	10 mS	
Rise Time		-	-	3 mS	
Overshoot at Turn on and off		-	-	0.5%	
Output Capacitance	$ESR \geq 1\text{ m}\Omega$	0 uF	-	4700 uF	
Transient Response					
0% ~ 50% Max Load	$V_o=All$	-	-	300 mV	Test conditions: di/dt = 10 A/uS; V_{in} =12 V;
Settling Time		-	-	100 uS	
50% ~ 0% Max Load		-	-	300 mV	
Settling Time		-	-	100 uS	

Note: All specifications are typical at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input

0.6 Vdc - 5.0 Vdc/40 A Output



General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				
Vo=5.0 V	91%	94%	-	Measured at Vin=12 V, full load.
Vo=3.3 V	89%	92%	-	
Vo=2.5 V	87%	90%	-	
Vo=1.8 V	84%	87%	-	
Vo=1.5 V	82%	85%	-	
Vo=1.2 V	79%	82%	-	
Vo=1.0 V	76%	79%	-	
Vo=0.6 V	68%	71%	-	
Switching Frequency	-	500 kHz	-	
Output Voltage Trim Range	0.6 V	-	5 V	Trim pin is open, Vo = 0.6 V.
Over Voltage Protection	110% Vo,set	115%Vo,set	130%Vo,set	Vin=12 V, Io=full load.
MTBF	3,061,000 hours			Calculated Per Bell Core SR-332 (Io = 80%Iomax; Vin=12 V; Ta = 25 °C.)
Dimensions (vertical mount)				
Inches (L × W × H)	1.45 x 1.10 x 0.377			
Millimeters (L × W × H)	36.83 x 27.94 x 9.58			
Weight	-	19 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.


Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off (Active High)				
Signal Low (Unit Off)	-0.3 V	-	0.8 V	Remote On/Off pin is open, unit is on.
Signal High (Unit On)	2.0 V	-	Vin,max	
Current Source/Sink	0 mA	-	3.3 mA	
PwGood (PowerGood)				
PwGood = High = Power Good	2.4 V	-	5.25 V	
	-	-	2 mA	
PwGood = Low = Power Not Good	0 V	-	0.4 V	
	-	-	4 mA	

Output Trim Equation

The Trim resistor should be connected between the Trim+ pin and Trim- pin.

$$R_{trim} = \frac{1.2}{V_o - 0.6} (K\Omega)$$

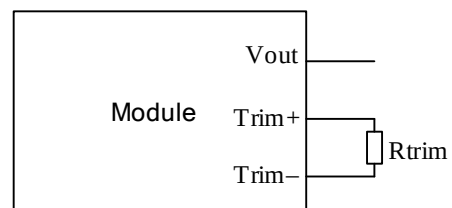


NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input


0.6 Vdc - 5.0 Vdc/40 A Output




Efficiency Data

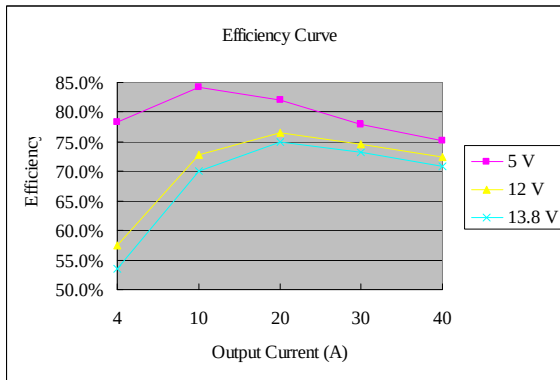


Vout = 0.6 V

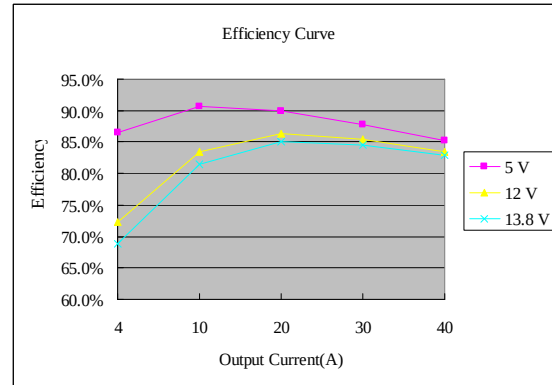


Vout = 1.2 V

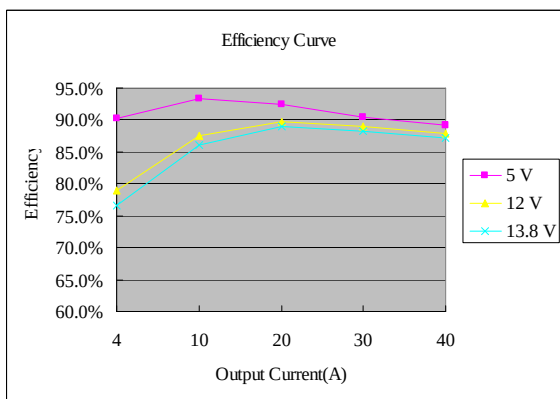


Vout = 1.8 V

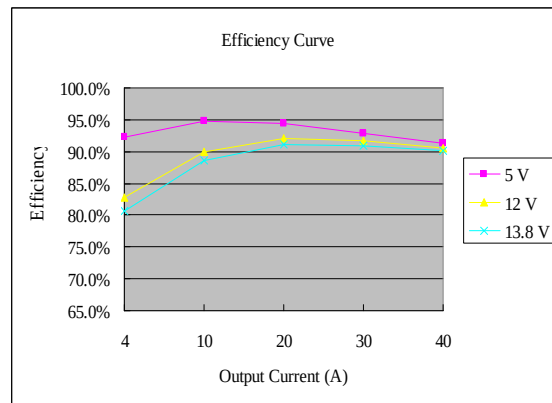

Vout = 2.5 V

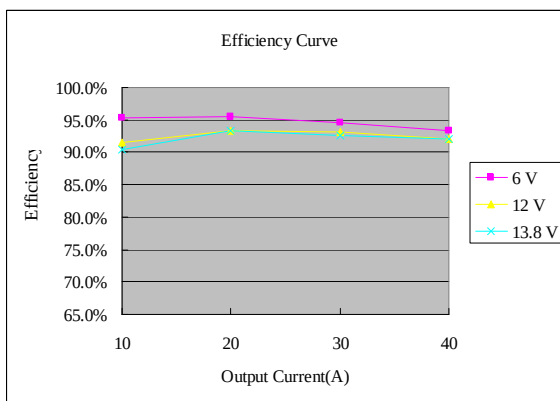

Vout = 3.3 V

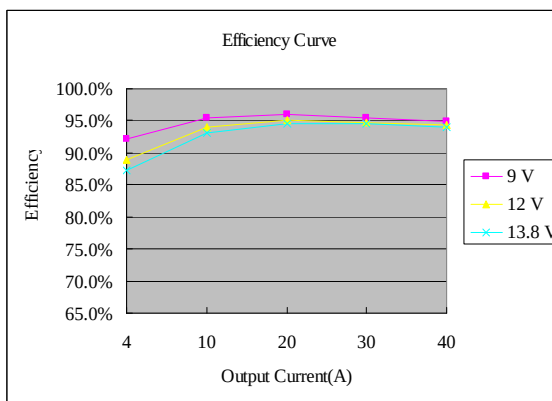

Vout = 5.0 V


NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input


0.6 Vdc - 5.0 Vdc/40 A Output

bel
POWER PRODUCTS


Thermal Derating Curves

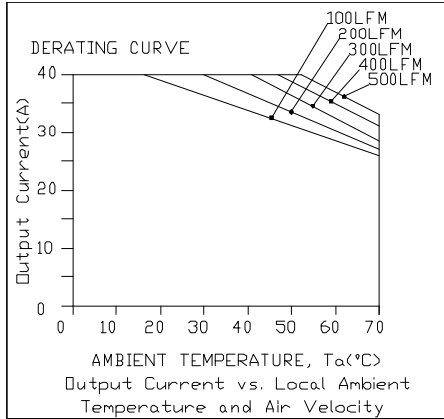


$V_{in}=12\text{ V}$, $V_o=0.6\text{ V}$

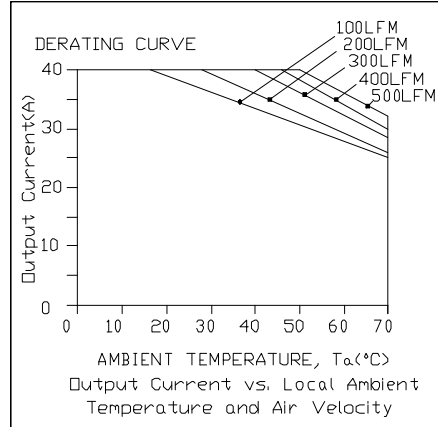


$V_{in}=12\text{ V}$, $V_o=1.2\text{ V}$

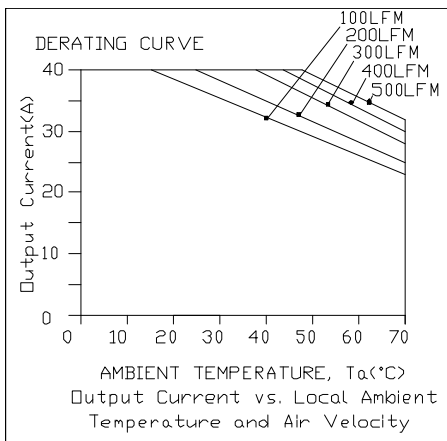


$V_{in}=12\text{ V}$, $V_o=1.8\text{ V}$

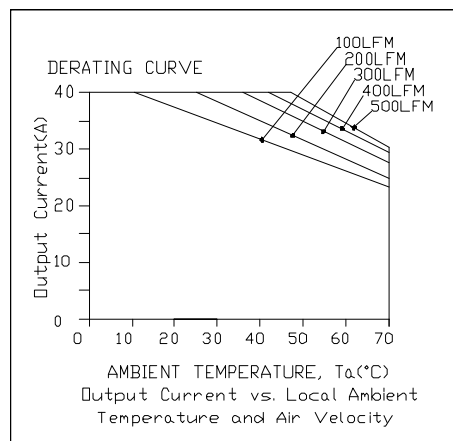

$V_{in}=12\text{ V}$, $V_o=2.5\text{ V}$

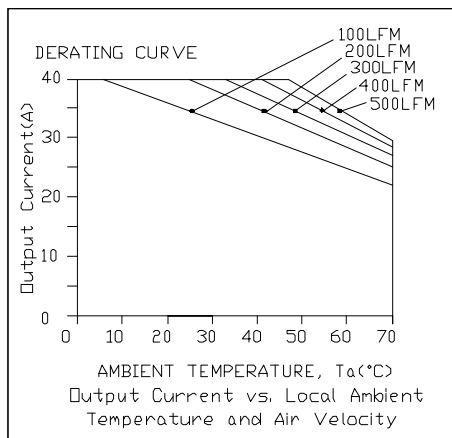

$V_{in}=12\text{ V}$, $V_o=3.3\text{ V}$

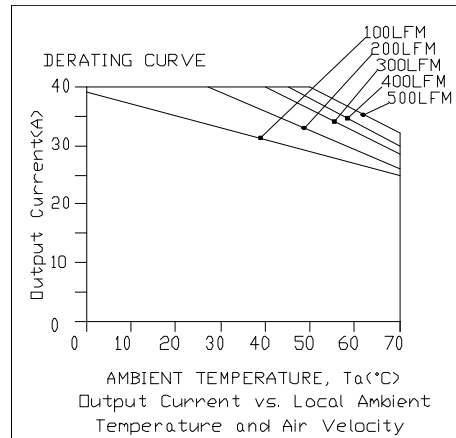

$V_{in}=12\text{ V}$, $V_o=5.0\text{ V}$


NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input


0.6 Vdc - 5.0 Vdc/40 A Output

bel
POWER PRODUCTS


Ripple and Noise Waveforms

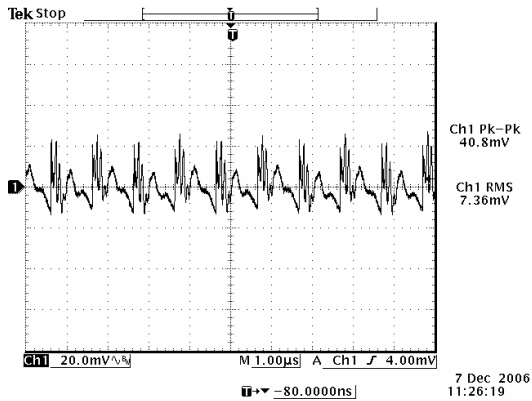


12 Vdc input, 0.6 Vdc/40 A output

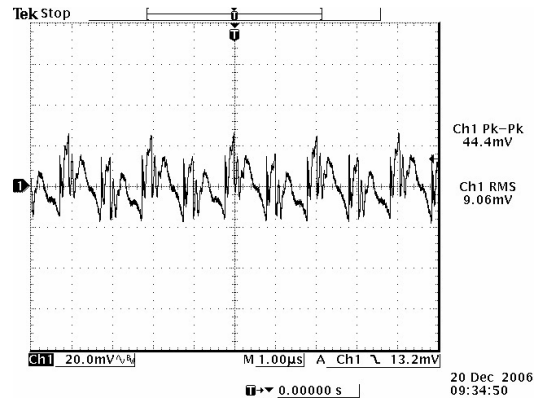


12 Vdc input, 1.2 Vdc/40 A output

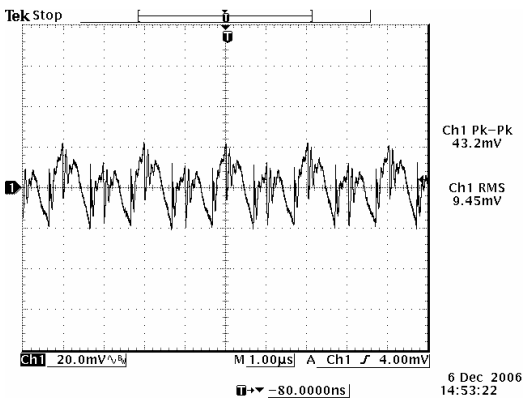


12 Vdc input, 1.8 Vdc/40 A output

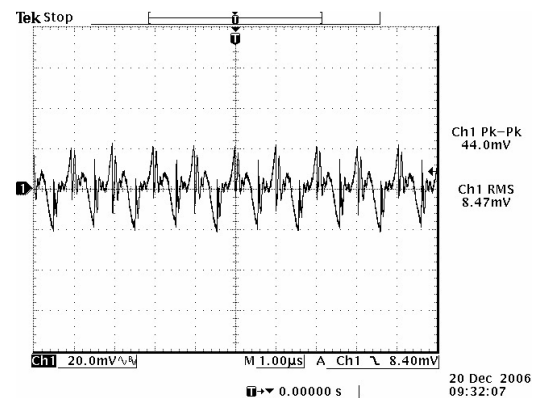

12 Vdc input, 2.5 Vdc/40 A output

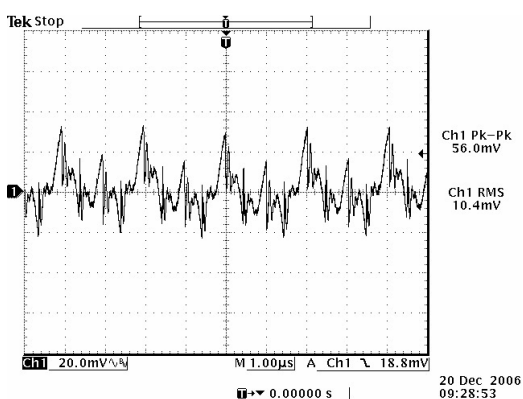

12 Vdc input, 3.3 Vdc/40 A output

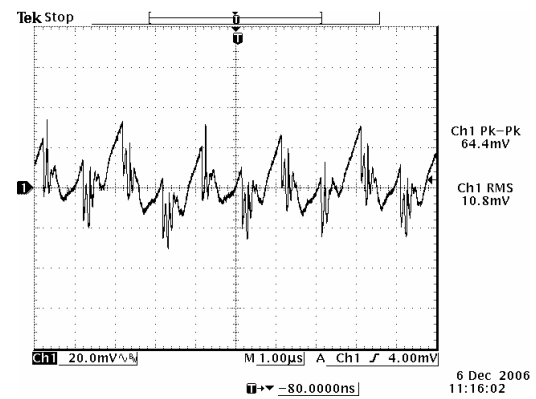

12 Vdc input, 5.0 Vdc/40 A output

Note: Ripple and noise at full load, 0-20 MHz BW, with a 10 uF tantalum cap and a 1uF ceramic cap at the output, and Ta=25 deg C.


NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input


0.6 Vdc - 5.0 Vdc/40 A Output




Transient Response Waveforms

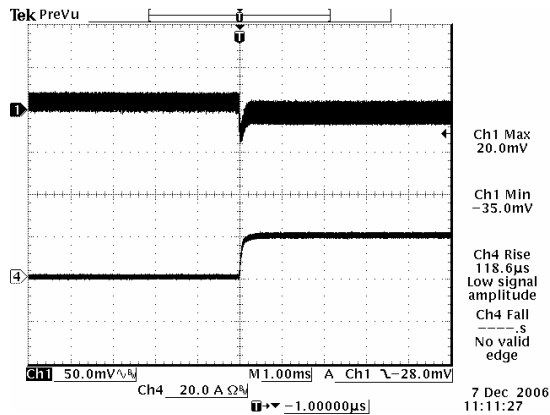


Vout= 0.6 V 0%-50% Load Transients

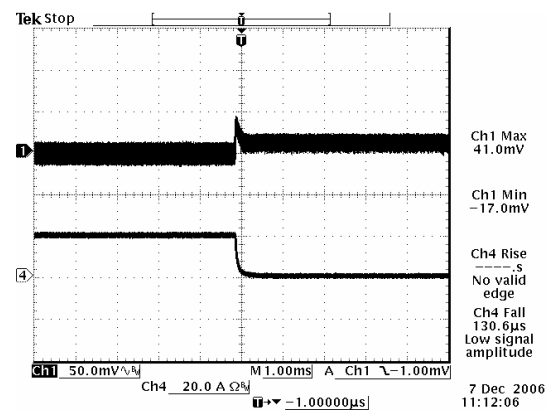


Vout=0.6 V 50%-0% Load Transients

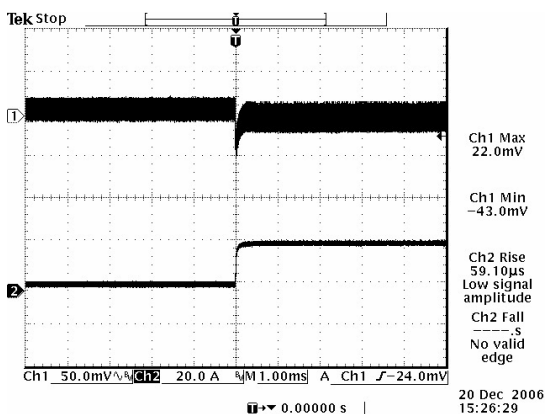


Vout=1.2 V 0%-50% Load Transients

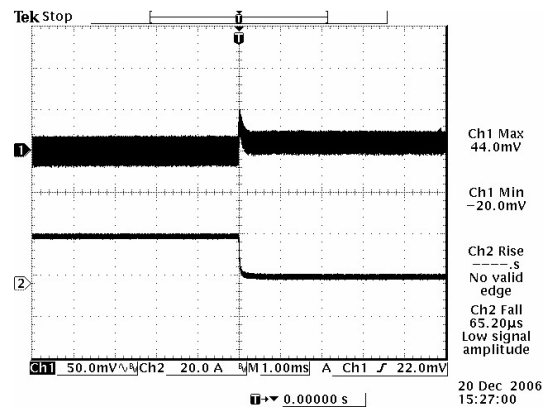

Vout=1.2 V 50%-0% Load Transients

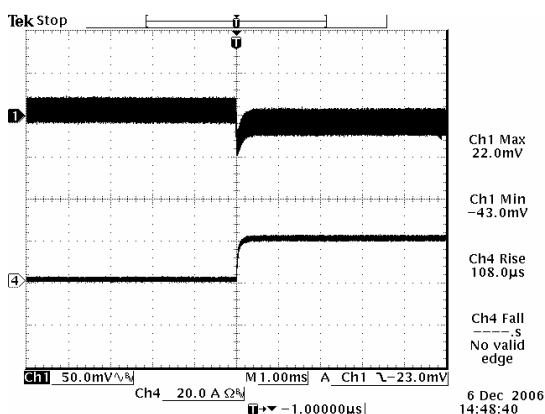

Vout=1.8 V 0%-50% Load Transients

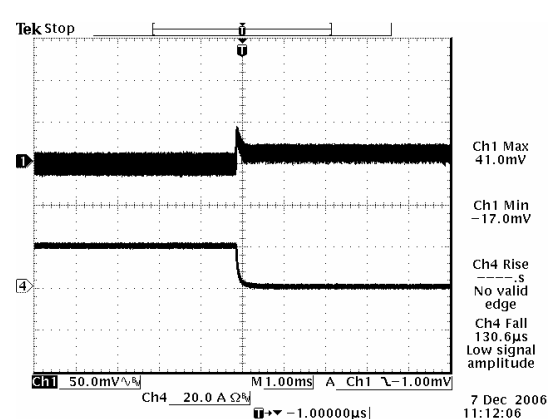

Vout=1.8 V 50%-0% Load Transients


NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input


0.6 Vdc - 5.0 Vdc/40 A Output




Transient Response Waveforms (continued)

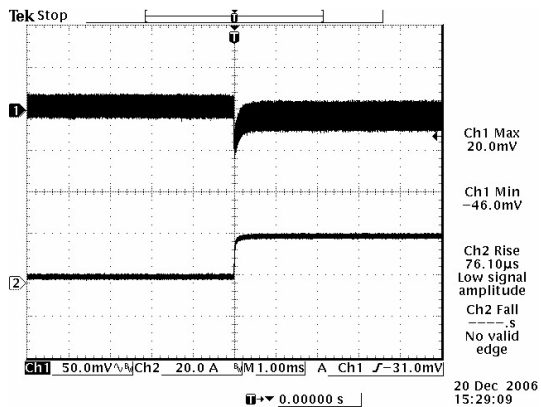


Vout= 2.5 V 0%-50% Load Transients

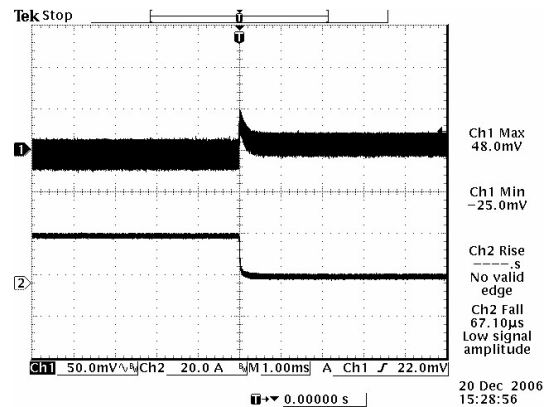


Vout=2.5 V 50%-0% Load Transients

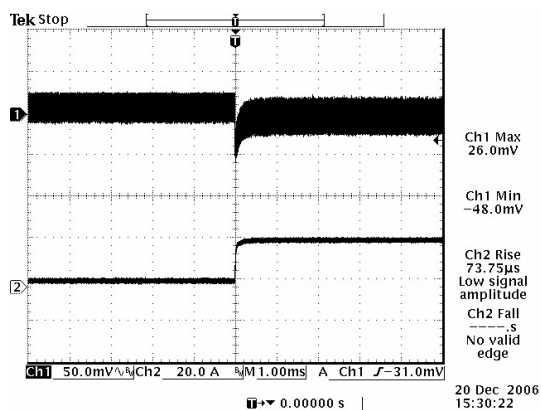


Vout=3.3 V 0%-50% Load Transients

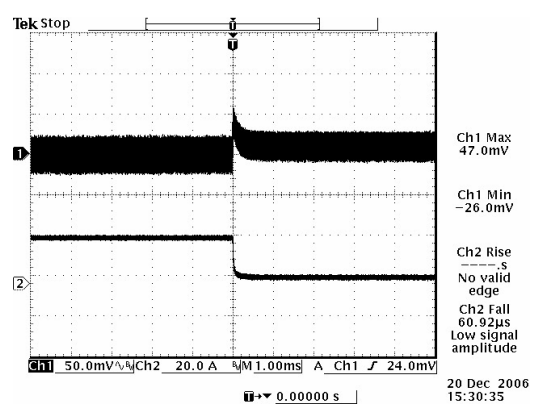

Vout=3.3 V 50%-0% Load Transients

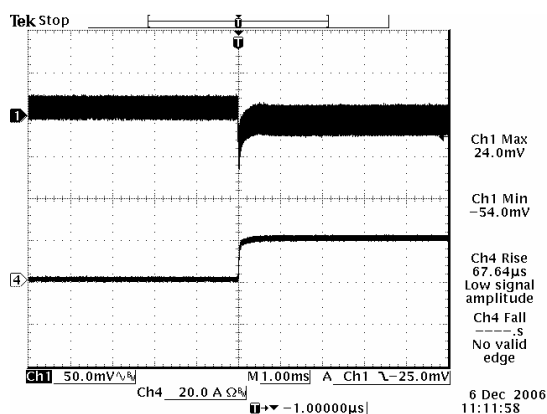

Vout=5 V 0%-50% Load Transients

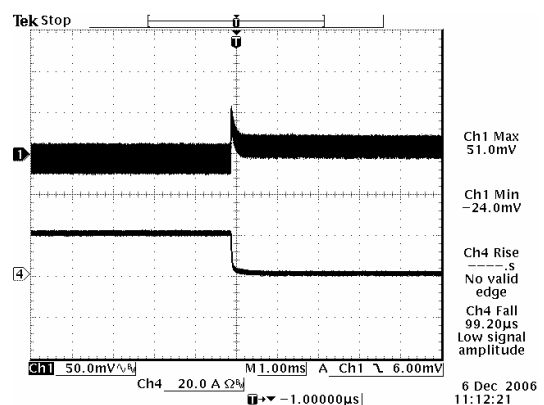

Vout=5 V 50%-0% Load Transients

Note: Transient response at $di/dt = 10 \text{ A/}\mu\text{S}$, with external electrolytic cap 4700 μF , and $T_a=25 \text{ deg C}$.


NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input


0.6 Vdc - 5.0 Vdc/40 A Output

bel
POWER PRODUCTS

Mechanical Outline

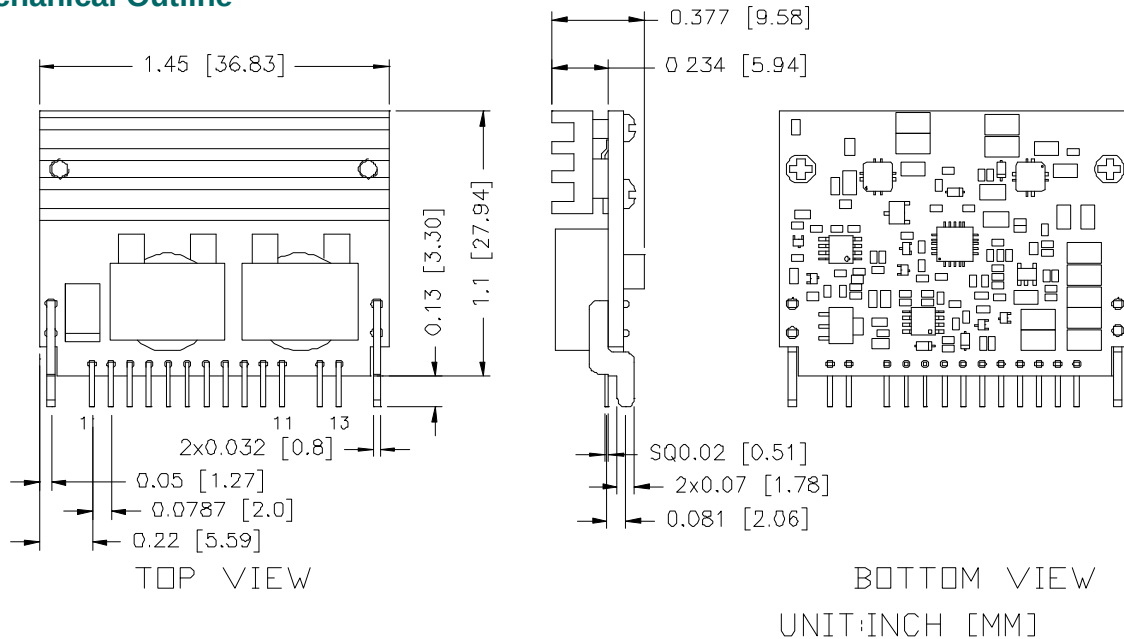

RECOMMENDED PAD LAYOUT

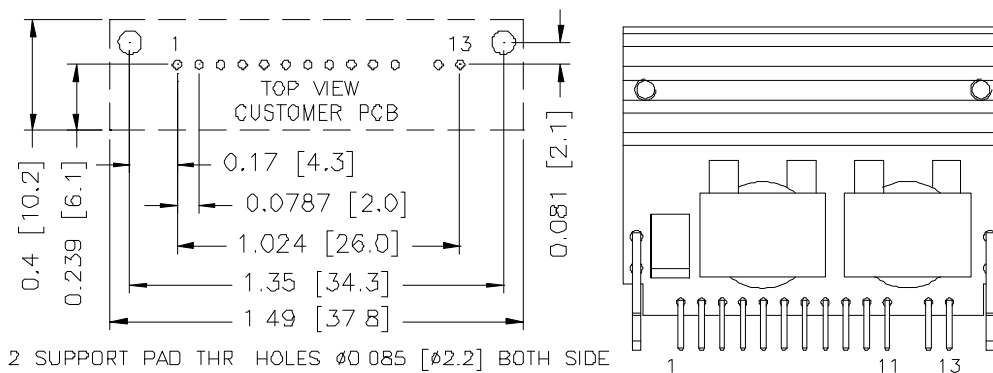

2 SUPPORT PAD THR HOLES $\phi 0.085$ [$\phi 2.2$] BOTH SIDE

13 PIN PAD THR. HOLES $\phi 0.032$ [$\phi 0.8$] BOTH SIDE

Pin Connections

Pin	Function
1	Vout
2	Vout
3	Vout
4	GND
5	GND
6	Enable
7	Trim-
8	Trim+
9	PwGOOD
10	Sense-
11	Sense+
12	Vin
13	Vin

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2009 Bel Fuse Inc. Specifications subject to change without notice. 061809

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com