

**Agilent Technologies
E4360 Modular Solar Array
Simulator**

**E4361A–E4362A Output Modules
E4360A SAS Mainframe**

Specifications Guide



Agilent Technologies

Legal Notices

© Agilent Technologies, Inc. 2011

No part of this document may be photocopied, reproduced, or translated to another language without the prior agreement and written consent of Agilent Technologies, Inc. as governed by United States and international copyright laws.

Manual Editions

Manual Part Number: E4360-90002

First Edition, December, 2011

Available in electronic format only.

Updates of this manual containing minor corrections may have the same edition date. Revised editions are identified by a new edition date.

Trademarks

Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation.

Warranty

The material contained in this document is provided "as is," and is subject to being changed, without notice, in future editions. Further, to the maximum extent permitted by applicable law, Agilent disclaims all warranties, either express or implied, with regard to this manual and any information contained herein, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. Agilent shall not be liable for errors or for incidental or consequential damages in connection with the furnishing, use, or performance of this document or of any information contained herein. Should Agilent and the user have a separate written agreement with warranty terms covering the material in this document that conflict with these terms, the warranty terms in the separate agreement shall control.

Certification

Agilent Technologies certifies that this product met its published specifications at time of shipment from the factory. Agilent Technologies further certifies that its calibration measurements are traceable to the United States National Institute of Standards and Technology, to the extent allowed by the Institute's calibration facility, and to the calibration facilities of other International Standards Organization members.

Technologies Licenses

The hardware and or software described in this document are furnished under a license and may be used or copied only in accordance with the terms of such license.

U.S. Government Restricted Rights

Software and technical data rights granted to the federal government include only those rights customarily provided to end user customers. Agilent provides this customary commercial license in Software and technical data pursuant to FAR 12.211 (Technical Data) and 12.212 (Computer Software) and, for the Department of Defense, DFARS 252.227-7015 (Technical Data – Commercial Items) and DFARS 227.7202-3 (Rights in Commercial Computer Software or Computer Software Documentation).

Declaration of Conformity

Declarations of Conformity for this product and for other Agilent products may be downloaded from the Web. Go to <http://regulations.corporate.agilent.com> and click on "Declarations of Conformity." You can then search by product number to find the latest Declaration of Conformity.

Regulatory Symbols



The CE mark shows that the product complies with all applicable European Directives.



The C-Tick mark is a registered trademark of the Australian Communications Authority.

ICES/NMB-001

This ISM device complies with Canadian ICES-001. Cet appareil ISM est conforme à la norme NMB-001 du Canada.



This is the symbol for an Industrial, Scientific and Medical, Group 1 Class A product.



The CSA mark is a registered trademark of Intertek-etlsemko Inc.



This is the RoHS (Restriction of Hazardous Substances) symbol for electrical and electronic equipment.



This symbol indicates separate collection for electrical and electronic equipment mandated under EU law as of August 13, 2005. All electric and electronic equipment are required to be separated from normal waste for disposal (Reference WEEE Directive 2002/96/EC).

Where to Find the Latest Information

This document provides specification and supplemental characteristic information for the following instruments:

- Agilent E4361A through E4362A Output Modules
- Agilent E4360A SAS Mainframes

The web contains the most up to date version of this manual. Go to www.agilent.com/find/E4360 to obtain the latest version of the manual.

NOTE

You can contact Agilent Technologies at one of the following telephone numbers for warranty, service, or technical support information.

In the United States: (800) 829-4444

In Europe: 31 20 547 2111


In Japan: 0120-421-345

Or use our Web link for information on contacting Agilent in your country or specific location: www.agilent.com/find/assist

Or contact your Agilent Technologies Representative.

Contents

1 - Agilent E4360A Output Module Differences.....	5
Output Module Differences.....	6
2 - Agilent E4361A SAS Output Modules	7
Performance Specifications	8
Supplemental Characteristics.....	9
Output Impedance in SAS Mode.....	11
3 - Agilent E4362A SAS Output Modules	13
Performance Specifications	14
Supplemental Characteristics.....	16
Output Impedance in SAS Mode.....	19
4 - Agilent E4360A SAS Mainframe.....	21
Supplemental Characteristics.....	22
Outline Diagram.....	24

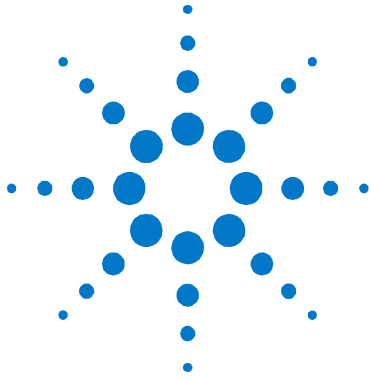

Chapter 1


Agilent E4360A

Output Module Differences

[Output Module Differences](#)..... 6

Output Module Differences

Model	Output Voltage (open circuit)	Output Current (short circuit)	Output Power (maximum)
E4361A	65 V	8.5 A	510 W
E4361A-J01	58 V	9.3 A	497.6 W
E4361A-J02	75 V	8 A	553.6 W
E4361A-J03	85 V	7 A	549.2 W
E4362A	130 V	5 A	600 W
E4362A-J01	117 V	5.5 A	594 W
E4362A-J02	120 V	5.4 A	594 W
E4362A-J03	108 V	6 A	600 W
E4362A-J04	170 V	3.8 A	596.6 W
E4362A-J05	95 V	6.3 A	552.5 W
E4362A-J06	180 V	3.4 A	564.9 W

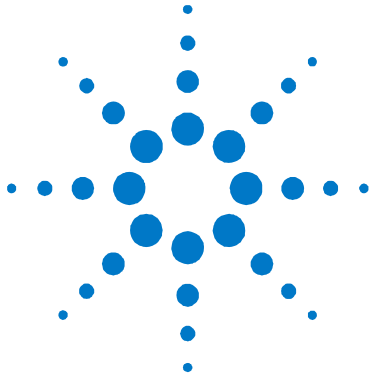

Chapter 2

Agilent E4361A SAS Output Modules

Performance Specifications	8
Supplemental Characteristics	9
Output Impedance in SAS Mode	11

Performance Specifications are warranted over a temperature range of 0 to 40°C unless specified otherwise. Unless otherwise noted, specifications apply to Fixed, SAS, and Table modes.

Refer to the Agilent E4360A Service Guide for the setup conditions for all performance specifications.

Supplemental characteristics are not warranted but are descriptions of performance determined either by design or by type testing. All supplemental characteristics are typical unless otherwise noted.

Performance Specifications

Parameter	Agilent E4361A	Agilent E4361A-J01	Agilent E4361A-J02	Agilent E4361A-J03
Output Ratings – SAS and Table mode				
Maximum power:	510 W	497.6 W	553.6 W	549.2 W
Maximum open-circuit voltage (Voc):	65 V	58 V	75 V	85 V
Maximum voltage point (Vmp):	60 V	53.5 V	69.2 V	78.5 V
Maximum short-circuit current (Isc)				
@ 220/240 VAC nominal:	8.5 A	9.3 A	8 A	7 A
@ 100/120 VAC nominal: ¹	4.25 A	4.65 A	4 A	3.5 A
Maximum current point (Imp)				
@ 220/240 VAC nominal:	8.5 A	9.3 A	8 A	7 A
@ 100/120 VAC nominal: ¹	4.25 A	4.65 A	4 A	3.5 A
Minimum impedance ($\Delta V/\Delta I$) ²	0.25 Ω	0.25 Ω	0.31 Ω	0.4 Ω
Output Ratings – Fixed mode				
Voltage:	0 – 60 V	0 – 53.5 V	0 – 69.2 V	0 – 78.5 V
Current				
@ 220/240 VAC nominal:	0 – 8.5 A	0 – 9.3 A	0 – 8 A	0 – 7 A
@ 100/120 VAC nominal: ¹	0 – 4.25 A	0 – 4.65 A	0 – 4 A	0 – 3.5 A
Current Derating - from 40°C to 55°C	0.11 A/°C	0.12 A/°C	0.10 A/°C	0.088 A/°C
Output Voltage Ripple & Noise (from 20 Hz to 20 MHz with a resistive load, outputs ungrounded, or either output grounded)				
SAS and Table mode:	20 mV rms 125 mV p-p	20 mV rms 125 mV p-p	21 mV rms 136 mV p-p	22 mV rms 147 mV p-p
Fixed mode (constant voltage):	24 mV rms 150 mV p-p	24 mV rms 150 mV p-p	25 mV rms 150 mV p-p	26 mV rms 150 mV p-p
Programming Accuracy (@ 23°C \pm 5°C) ³				
Fixed mode voltage:	0.075% +25 mV	0.075% +22 mV	0.075% +29 mV	0.075% +33 mV
Current:	0.20% +20 mA	0.20% +22 mA	0.20% +19 mA	0.20% +17 mA
Readback Accuracy ⁴ (from front panel or over GPIB with respect to actual output @ 23° \pm 5 °C)				
Voltage:	0.08% +25 mV	0.08% +22 mV	0.08% +29 mV	0.08% +33 mV
+Current:	0.20% +20 mA	0.20% +23 mA	0.20% +19 mA	0.20% +17 mA
–Current:	0.35% +48 mA	0.35% +53 mA	0.35% +46 mA	0.35% +40 mA
Load Regulation - Fixed mode (change in output voltage or current for any load change within ratings)				
Constant voltage:	2 mV	2 mV	2 mV	2 mV
Constant current:	1 mA	1 mA	1 mA	1 mA
Line Regulation – Fixed mode (change in output voltage or current for any mains change within ratings)				
Constant voltage:	2 mV	2 mV	2 mV	2 mV
Constant current:	1 mA	1 mA	1 mA	1 mA

¹There is no current derating when only one output module is installed in the mainframe.

²There is no maximum impedance restriction. The programmed value of Imp can be less than or equal to Isc.

³In SAS mode, the output current is related to the readback output voltage by an internal algorithm. In Table mode, the output current is related to the readback output voltage by interpolation between points that are entered by the user.

Supplemental Characteristics

Parameter	Agilent E4361A	Agilent E4361A-J01	Agilent E4361A-J02	Agilent E4361A-J03
Output Current Ripple & Noise (from 20 Hz to 20 MHz with a resistive load, outputs ungrounded, or either output grounded)				
SAS and Table mode:	4 mA rms 32 mA p-p	4 mA rms 32 mA p-p	4 mA rms 32 mA p-p	4 mA rms 32 mA p-p
Fixed mode (constant current):	2.5 mA rms 19 mA p-p	2.5 mA rms 19 mA p-p	2.5 mA rms 19 mA p-p	2.5 mA rms 19 mA p-p
Output Programming Range (maximum programmable values)				
SAS and Table mode voltage:	0 – 65 V	0 – 58 V	0 – 75 V	0 – 85 V
Fixed mode voltage:	0 – 61.5 V	0 – 54.8 V	0 – 71.0 V	0 – 80.4 V
Output current @ 220/240 VAC nominal: @ 100/120 VAC nominal: ¹	0 – 8.67A 0 – 4.33 A	0 – 9.48 A 0 – 4.75 A	0 – 8.16 A 0 – 4.08 A	0 – 7.14 A 0 – 3.57 A
Over-voltage protection:	0 – 74 V	0 – 66.7 V	0 – 84.3 V	0 – 94.6 V
Over-current limit:	0 – 10.6 A	0 – 11.6 A	0 – 10.0 A	0 – 8.8 A
Programming Resolution (average values)				
Voltage:	19 mV	17 mV	21 mV	24 mV
Current:	2.7 mA	3.0 mA	2.5 mA	2.2 mA
Over-voltage protection:	325 mV	295 mV	367 mV	409 mV
Over-current limit:	46 mA	52 mA	43 mA	38 mA
Programming Accuracy				
Over-voltage protection:	0.65 V	0.60 V	0.73 V	0.82 V
Over-current limit:	0.5% +215 mA	0.5% +235 mA	0.5% +202 mA	0.5% +177 mA
Current monitor (referenced to P common):	1.0% +130 mA	1.0% +140 mA	1.0% +122 mA	1.0% +107 mA
Fixed Mode Analog Current Programming				
Analog programming:	1.0% +5.5 mA	1.0% +6 mA	1.0% +5.2 mA	1.0% +4.5 mA
+Ip to –Ip Differential Input (0 to full scale):	0 to –4 V	0 to –4 V	0 to –4 V	0 to –4 V
Maximum common mode voltage (referenced to +):	±18 V	±18 V	±18 V	±18 V
Nominal input impedance:	20 kΩ	20 kΩ	20 kΩ	20 kΩ
Drift/Temperature Stability (change in output over 8 hours under constant load, line, and ambient, following a 30-minute warmup)				
Voltage:	0.04% +1 mV	0.04% +0.9 mV	0.04% +1.2 mV	0.04% +1.3 mV
Current:	0.10% +0.85 mA	0.10% +0.93 mA	0.10% +0.8 mA	0.10% +0.7 mA
Temperature Coefficients (output change per °C)				
Voltage:	0.01% +325 μV	0.01% +290 μV	0.01% +375 μV	0.01% +425 μV
Current:	0.025% +215 μA	0.025% +235 μA	0.025% +202 μA	0.025% +177 μA
Output Capacitance				
Capacitance:	< 100 nF	< 100 nF	< 100 nF	< 100 nF
Maximum Reverse Diode Current (with fans running)				
Current:	8.5 A	9.3 A	8.0 A	7.0 A

¹There is no current derating when only one output module is installed in the mainframe.



Supplemental Characteristics (continued)

Parameter	All E4361A Output Modules
Output Current Settling Time (recovery to within 1.5 A of an operating point on the I-V curve ($V < 90\%$ of VMP) after switching from a short circuit to a fixed load)	< 5 μ s
Current Monitor Output (IM– with respect to P ∇)	0 V to –4 V represents zero to the rated output current
Maximum Capacitive Load for stable operation SAS and Table mode:	2000 μ F
Fixed mode:	2000 μ F
Load Lead Drop with Remote Sensing SAS and Table mode:	up to 2 volts + (Voc - Vmp)
Fixed mode:	up to 2 volts total
Current Sinking Capability SAS and Table mode:	560 mA
Fixed mode:	440 mA
Voltage Programming Rise/Fall Time (time for output to change from 90% to 10% or 10% to 90% of its total excursion)	< 8 ms
Voltage Programming Settling Time (time for output change to settle within 0.1% of its Fixed mode voltage rating)	25 ms typical
Monotonicity	Output is monotonic over entire rated voltage, current, and temperature range
Auto-Parallel Configuration	Up to 4 outputs
Series and Shunt Switching Frequency (frequency is controlling by a customer-supplied external series or shunt FET connected to the output.)	50 kHz maximum ²
Output Terminal Isolation (from any terminal to chassis ground - this includes float plus output voltage)	± 240 Vdc maximum
Recommended Calibration Interval	1 year

²Higher switching frequencies may be possible given the right load conditions consisting of but not necessarily limited to the inductance of the load cable to the shunt switch and the on/off edge rate of the shunt switch.

Output Impedance in SAS Mode


The following impedance graphs were generated at three points on Agilent Models E4361A operating in SAS mode. The reference curve shows the location of the three sample points on which the output impedance graphs are based.

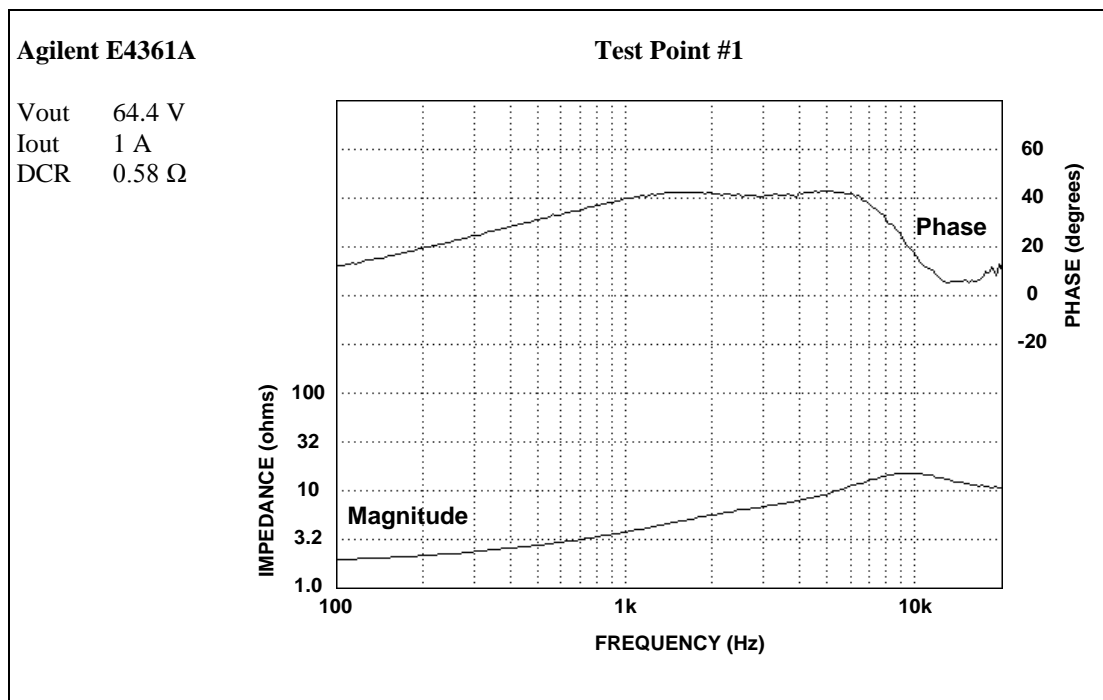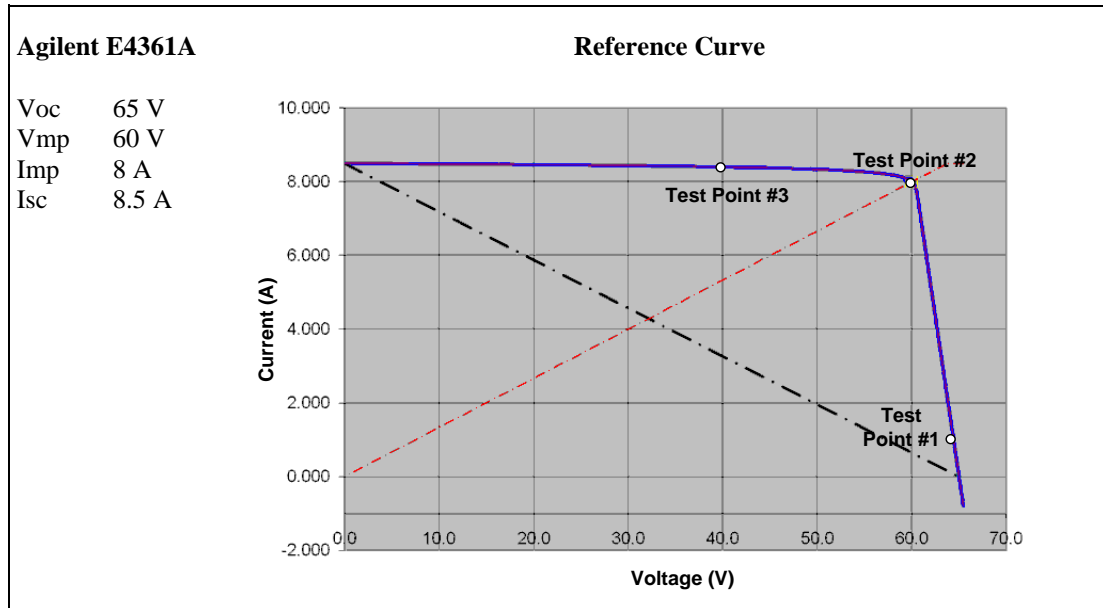

Agilent E4361A

Test Point #2


Vout 60 V
Iout 8 A
DCR 4.8 Ω

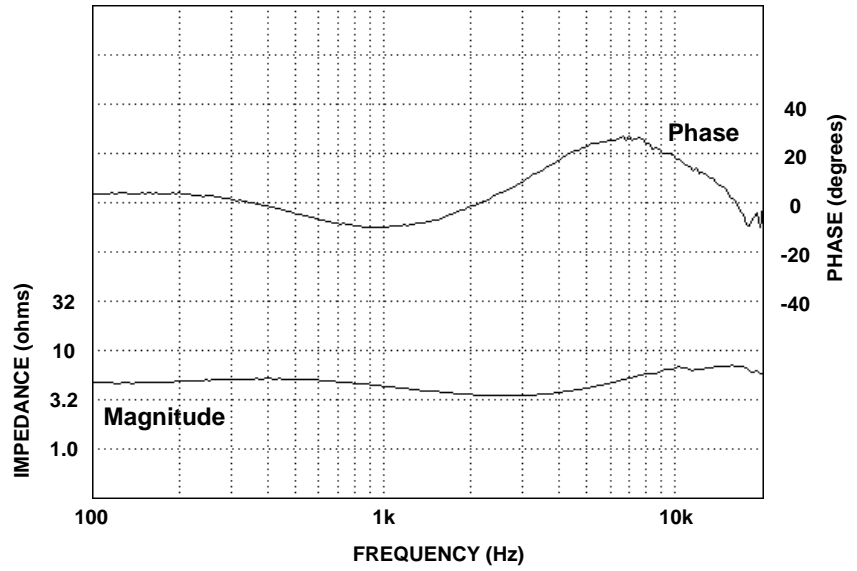


Agilent E4361A

Test Point #3

Vout 40 V
Iout 8.4 A
DCR 110 Ω

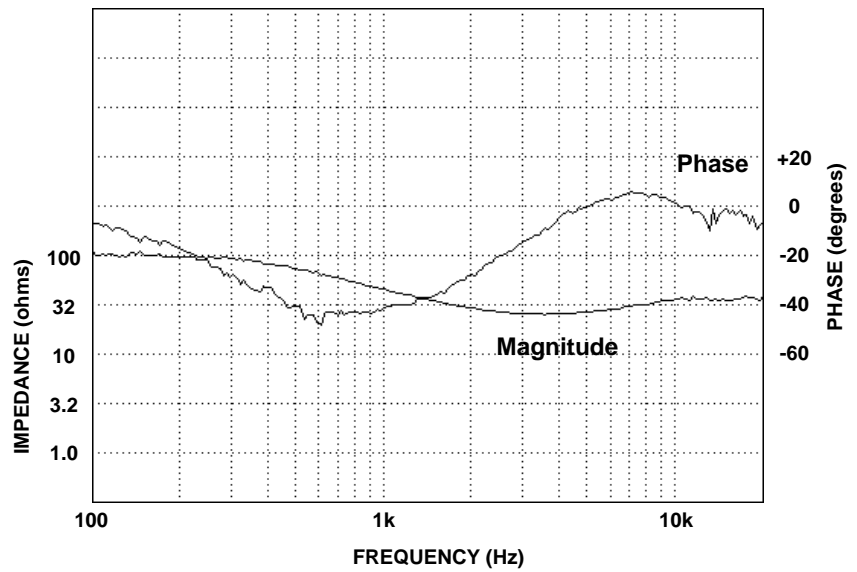

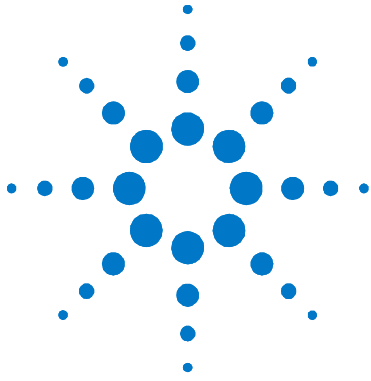

Chapter 3

Agilent E4362A SAS Output Modules

Performance Specifications	14
Supplemental Characteristics	16
Output Impedance in SAS Mode	19

Performance Specifications are warranted over a temperature range of 0 to 40°C unless specified otherwise. Unless otherwise noted, specifications apply to Fixed, SAS, and Table modes.

Refer to the Agilent E4360A Service Guide for the setup conditions for all performance specifications.

Supplemental characteristics are not warranted but are descriptions of performance determined either by design or by type testing. All supplemental characteristics are typical unless otherwise noted.

Performance Specifications

Parameter	Agilent E4362A	Agilent E4362A-J01	Agilent E4362A-J02	Agilent E4362A-J03
Output Ratings – SAS and Table mode				
Maximum power:	600 W	594 W	594 W	600 W
Maximum open-circuit voltage (Voc):	130 V	117 V	120 V	108 V
Maximum voltage point (Vmp):	120 V	108 V	110 V	100 V
Maximum short-circuit current (Isc)				
@ 220/240 VAC nominal:	5.0 A	5.5 A	5.4 A	6 A
@ 100/120 VAC nominal: ¹	2.5 A	2.75 A	2.7 A	3 A
Maximum current point (Imp)				
@ 220/240 VAC nominal:	5.0 A	5.5 A	5.4 A	6 A
@ 100/120 VAC nominal: ¹	2.5 A	2.75 A	2.7 A	3 A
Minimum impedance ($\Delta V/\Delta I$) ²	1 Ω	1 Ω	1 Ω	1 Ω
Output Ratings – Fixed mode				
Voltage:	0 – 120 V	0 – 108 V	0 – 110 V	0 – 100 V
Current				
@ 220/240 VAC nominal:	0 – 5.0 A	0 – 5.5 A	0 – 5.4 A	0 – 6.0 A
@ 100/120 VAC nominal: ¹	0 – 2.5 A	0 – 2.75 A	0 – 2.7 A	0 – 3.0 A
Current Derating - from 40°C to 55°C	0.063 A/°C	0.069 A/°C	0.068 A/°C	0.075 A/°C
Output Voltage Ripple & Noise (from 20 Hz to 20 MHz with a resistive load, outputs ungrounded, or either output grounded)				
SAS and Table mode:	24 mV rms 195 mV p-p	24 mV rms 195 mV p-p	24 mV rms 195 mV p-p	23 mV rms 172 mV p-p
Fixed mode (constant voltage):	30 mV rms 150 mV p-p	30 mV rms 150 mV p-p	30 mV rms 150 mV p-p	28 mV rms 150 mV p-p
Programming Accuracy (@ 23°C \pm 5°C) ³				
Fixed mode voltage:	0.075% +50 mV	0.075% +50 mV	0.075% +50 mV	0.075% +42 mV
Current:	0.20% +10 mA	0.20% +11 mA	0.20% +11 mA	0.20% +12 mA
Readback Accuracy ⁴ (from front panel or over GPIB with respect to actual output @ 23° \pm 5 °C)				
Voltage:	0.08% +50 mV	0.08% +50 mV	0.08% +50 mV	0.08% +42 mV
+Current:	0.20% +10 mA	0.20% +11 mA	0.20% +11 mA	0.20% +12 mA
–Current:	0.35% +24 mA	0.35% +26 mA	0.35% +26 mA	0.35% +29 mA
Load Regulation - Fixed mode (change in output voltage or current for any load change within ratings)				
Constant voltage:	2 mV	2 mV	2 mV	2 mV
Constant current:	1 mA	1 mA	1 mA	1 mA
Line Regulation – Fixed mode (change in output voltage or current for any mains change within ratings)				
Constant voltage:	2 mV	2 mV	2 mV	2 mV
Constant current:	1 mA	1 mA	1 mA	1 mA

¹There is no current derating when only one output module is installed in the mainframe.

²There is no maximum impedance restriction. The programmed value of Imp can be less than or equal to Isc.

³In SAS mode, the output current is related to the readback output voltage by an internal algorithm. In Table mode, the output current is related to the readback output voltage by interpolation between points that are entered by the user.

Performance Specifications (continued)

Parameter	Agilent E4362A- J04	Agilent E4362A- J05	Agilent E4362A- J06
Output Ratings – SAS and Table mode			
Maximum power:	596.6 W	552.5 W	564.9 W
Maximum open-circuit voltage (Voc):	170 V	95 V	180 V
Maximum voltage point (Vmp):	157 V	87.7 V	166.2 V
Maximum short-circuit current (Isc)			
@ 220/240 VAC nominal:	3.8 A	6.3 A	3.4 A
@ 100/120 VAC nominal: ¹	1.9 A	3.15 A	1.7 A
Maximum current point (Imp)			
@ 220/240 VAC nominal:	3.8 A	6.3 A	3.4 A
@ 100/120 VAC nominal: ¹	1.9 A	3.15 A	1.7 A
Minimum impedance ($\Delta V/\Delta I$) ²	1.72 Ω	1 Ω	2.04 Ω
Output Ratings – Fixed mode			
Voltage:	0 – 157 V	0 – 87.7 V	0 – 166.2 V
Current			
@ 220/240 VAC nominal:	0 – 3.8 A	6.3 A	0 – 3.4 A
@ 100/120 VAC nominal: ¹	0 – 1.9 A	3.15 A	0 – 1.7 A
Current Derating - from 40°C to 55°C	0.048 A/°C	0.079 A/°C	0.043 A/°C
Output Voltage Ripple & Noise (from 20 Hz to 20 MHz with a resistive load, outputs ungrounded, or either output grounded)			
SAS and Table mode:	27 mV rms 239 mV p-p	22 mV rms 158 mV p-p	28 mV rms 249 mV p-p
Fixed mode (constant voltage):	34 mV rms 150 mV p-p	27 mV rms 150 mV p-p	35 mV rms 150 mV p-p
Programming Accuracy (@ 23°C $\pm 5^\circ\text{C}$) ³			
Fixed mode voltage:	0.075% +66 mV	0.075% +37mV	0.075% +70 mV
Current:	0.20% +8 mA	0.20% +15 mA	0.20% +7 mA
Readback Accuracy ⁴ (from front panel or over GPIB with respect to actual output @ 23° $\pm 5^\circ\text{C}$)			
Voltage:	0.08% +66 mV	0.08% +37mV	0.08% +70 mV
+Current:	0.20% +8mA	0.20% +15mA	0.20% +7 mA
-Current:	0.35% +19mA	0.35% +36mA	0.35% +17 mA
Load Regulation - Fixed mode (change in output voltage or current for any load change within ratings)			
Constant voltage:	2 mV	2 mV	2 mV
Constant current:	1 mA	1 mA	1 mA
Line Regulation – Fixed mode (change in output voltage or current for any mains change within ratings)			
Constant voltage:	2 mV	2 mV	2 mV
Constant current:	1 mA	1 mA	1 mA

¹There is no current derating when only one output module is installed in the mainframe.

²There is no maximum impedance restriction. The programmed value of Imp can be less than or equal to Isc.

³In SAS mode, the output current is related to the readback output voltage by an internal algorithm. In Table mode, the output current is related to the readback output voltage by interpolation between points that are entered by the user.

Supplemental Characteristics

Parameter	Agilent E4362A	Agilent E4362A-J01	Agilent E4362A-J02	Agilent E4362A-J03
Output Current Ripple & Noise (from 20 Hz to 20 MHz with a resistive load, outputs ungrounded, or either output grounded)				
SAS and Table mode:	4 mA rms 32 mA p-p	4 mA rms 32 mA p-p	4 mA rms 32 mA p-p	4 mA rms 32 mA p-p
Fixed mode (constant current):	2.5 mA rms 19 mA p-p	3 mA rms 20 mA p-p	3 mA rms 20 mA p-p	2.5 mA rms 19 mA p-p
Output Programming Range (maximum programmable values)				
SAS and Table mode voltage:	0 – 130 V	0 – 117 V	0 – 120 V	0 – 108 V
Fixed mode voltage:	0 – 123 V	0 – 110.7 V	0 – 112.75 V	0 – 102.5 V
Output current @ 220/240 VAC nominal: @ 100/120 VAC nominal: ¹	0 – 5.1 A 0 – 2.55 A	0 – 5.61 A 0 – 2.81 A	0 – 5.51 A 0 – 2.75 A	0 – 6.12 A 0 – 3.06 A
Over-voltage protection:	0 – 140 V	0 – 126.6 V	0 – 129 V	0 – 117.6 V
Over-current limit:	0 – 6.25 A	0 – 6.875 A	0 – 6.75 A	0 – 7.5 A
Programming Resolution (average values)				
Voltage:	37 mV	35 mV	35 mV	31 mV
Current:	1.6 mA	1.8 mA	1.7 mA	1.9 mA
Over-voltage protection:	600 mV	575 mV	575 mV	510 mV
Over-current limit:	27 mA	31 mA	30 mA	32 mA
Programming Accuracy				
Over-voltage protection:	1.2 V	1.1 V	1.1 V	1.0 V
Over-current limit:	0.5% +125 mA	0.5% +140 mA	0.5% +135 mA	0.5% +150 mA
Current monitor (referenced to P common):	1.0% +75 mA	1.0% +85 mA	1.0% +81 mA	1.0% +90 mA
Fixed Mode Analog Current Programming				
Analog programming:	1.0% +3.2mA	1.0% +3.5 mA	1.0% +3.4 mA	1.0% +3.9 mA
+Ip to –Ip Differential Input (0 to full scale):	0 to –4 V	0 to –4 V	0 to –4 V	0 to –4 V
Maximum common mode voltage (referenced to +):	±18 V	±18 V	±18 V	±18 V
Nominal input impedance:	20 k Ω	20 k Ω	20 k Ω	20 k Ω
Drift/Temperature Stability (change in output over 8 hours under constant load, line, and ambient, following a 30-minute warmup)				
Voltage:	0.04% +2 mV	0.04% +2 mV	0.04% +2 mV	0.04% +1.7 mV
Current:	0.10% +0.5 mA	0.10% +0.55 mA	0.10% +0.54 mA	0.10% +0.6 mA
Temperature Coefficients (output change per °C)				
Voltage:	0.01% +650 μ V	0.01% +650 μ V	0.01% +650 μ V	0.01% +540 μ V
Current:	0.025% +125 μ A	0.025% +140 μ A	0.025% +135 μ A	0.025% +150 μ A
Output Capacitance				
Capacitance:	< 50 nF	< 50 nF	< 50 nF	< 50 nF
Maximum Reverse Diode Current (with fans running)				
Current:	5.0 A	5.5 A	5.4 A	6.0 A

¹There is no current derating when only one output module is installed in the mainframe.

Supplemental Characteristics (continued)

Parameter	Agilent E4362A- J04	Agilent E4362A- J05	Agilent E4362A- J06
Output Current Ripple & Noise (from 20 Hz to 20 MHz with a resistive load, outputs ungrounded, or either output grounded)			
SAS and Table mode:	4 mA rms 32 mA p-p	4 mA rms 32 mA p-p	4 mA rms 32 mA p-p
Fixed mode (constant current):	2.5 mA rms 19 mA p-p	2.5 mA rms 19 mA p-p	2.5 mA rms 19 mA p-p
Output Programming Range (maximum programmable values)			
SAS and Table mode voltage:	0 – 170 V	0 – 95 V	0 – 180 V
Fixed mode voltage:	0 – 160.9 V	0 – 89.9 V	0 – 170.3 V
Output current @ 220/240 VAC nominal: @ 100/120 VAC nominal: ¹	0 – 3.876 A 0 – 1.94 A	0 – 6.426 A 0 – 3.21 A	0 – 3.46 A 0 – 1.73 A
Over-voltage protection:	0 – 181.3 V	0 – 103.9 V	0 – 191.5 V
Over-current limit:	0 – 4.75 A	0 – 7.87 A	0 – 4.3 A
Programming Resolution (average values)			
Voltage:	48 mV	27 mV	51 mV
Current:	1.2 mA	2 mA	1.1 mA
Over-voltage protection:	769 mV	452 mV	811 mV
Over-current limit:	21 mA	34 mA	18 mA
Programming Accuracy			
Over-voltage protection:	1.54 V	0.9 V	1.62 V
Over-current limit:	0.5% +95 mA	0.5% +159 mA	0.5% +85 mA
Current monitor (referenced to P common):	1.0% +57 mA	1.0% +96 mA	1.0% +51 mA
Fixed Mode Analog Current Programming			
Analog programming:	1.0% +2.5 mA	1.0% +4.1 mA	1.0% +2.2 mA
+Ip to –Ip Differential Input (0 to full scale):	0 to –4 V	0 to –4 V	0 to –4 V
Maximum common mode voltage (referenced to +):	±18 V	±18 V	±18 V
Nominal input impedance:	20 kΩ	20 kΩ	20 kΩ
Drift/Temperature Stability (change in output over 8 hours under constant load, line, and ambient, following a 30-minute warmup)			
Voltage:	0.04% +2.6 mV	0.04% +1.5 mV	0.04% +2.8 mV
Current:	0.10% +0.38 mA	0.10% +0.63 mA	0.10% +0.34 mA
Temperature Coefficients (output change per °C)			
Voltage:	0.01% +850 μV	0.01% +475 μV	0.01% +900 μV
Current:	0.025% +950 μA	0.025% +159 μA	0.025% +85 μA
Output Capacitance			
Capacitance:	< 50 nF	<100 nF	< 50 nF
Maximum Reverse Diode Current (with fans running)			
Current:	3.8 A	6.3 A	3.4 A

¹There is no current derating when only one output module is installed in the mainframe.



Supplemental Characteristics (continued)

Parameter	All E4362A Output Modules
Output Current Settling Time (recovery to within 1.5 A of an operating point on the I-V curve ($V < 90\%$ of VMP) after switching from a short circuit to a fixed load)	< 5 μ s
Current Monitor Output (IM– with respect to P ∇)	0 V to –4 V represents zero to the rated output current
Maximum Capacitive Load for stable operation SAS and Table mode:	2000 μ F
Fixed mode:	2000 μ F
Load Lead Drop with Remote Sensing SAS and Table mode:	up to 2 volts + (Voc - Vmp)
Fixed mode:	up to 2 volts total
Current Sinking Capability SAS and Table mode:	560 mA for all except: 400 mA for E4362A–J04 only 365 mA for E4362A–J06 only
Fixed mode:	440 mA for all except: 340 mA for E4362A–J04 only 340 mA for E4362A–J06 only
Voltage Programming Rise/Fall Time (time for output to change from 90% to 10% or 10% to 90% of its total excursion)	< 8 ms
Voltage Programming Settling Time (time for output change to settle within 0.1% of its Fixed mode voltage rating)	25 ms typical
Monotonicity	Output is monotonic over entire rated voltage, current, and temperature range
Auto-Parallel Configuration	Up to 4 outputs
Series and Shunt Switching Frequency (frequency is controlling by a customer-supplied external series or shunt FET connected to the output.)	50 kHz maximum ² for all except: 45 kHz maximum ² for E4362A–J04 only 30 kHz maximum ² for E4362A–J06 only
Output Terminal Isolation (from any terminal to chassis ground - this includes float plus output voltage)	\pm 240 Vdc maximum
Recommended Calibration Interval	1 year

²Higher switching frequencies may be possible given the right load conditions consisting of but not necessarily limited to the inductance of the load cable to the shunt switch and the on/off edge rate of the shunt switch.

Output Impedance in SAS Mode


The following impedance graphs were generated at three points on Agilent Models E4362A operating in SAS mode. The reference curve shows the location of the three sample points on which the output impedance graphs are based.

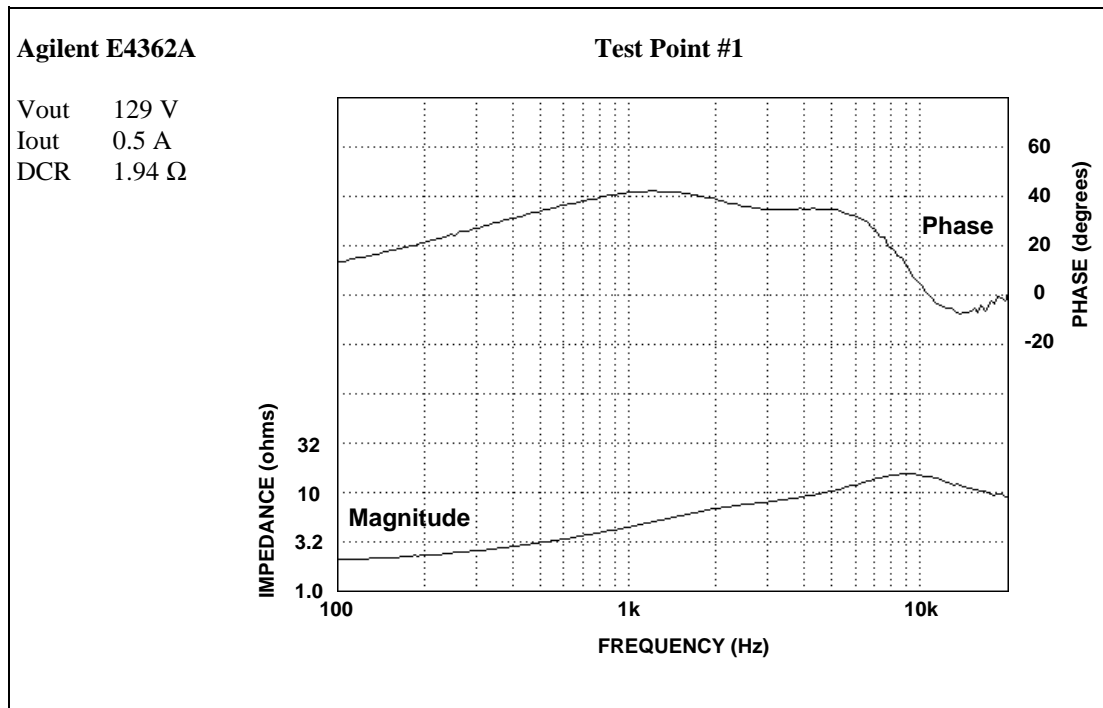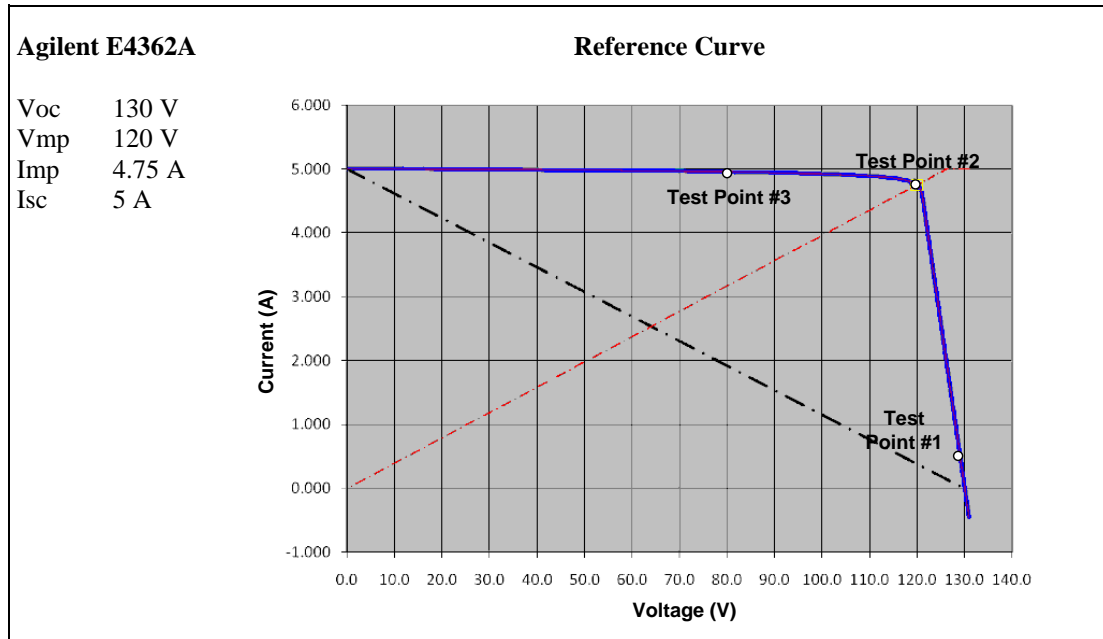

Agilent E4362A

Test Point #2


Vout 120 V
Iout 4.75 A
DCR 15.7 Ω

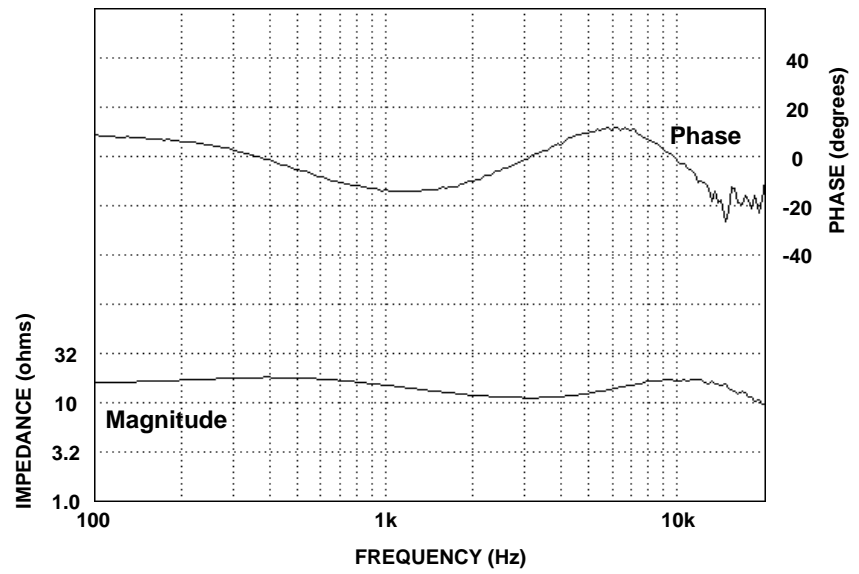


Agilent E4362A

Test Point #3

Vout 80 V
Iout 4.95 A
DCR 375 Ω

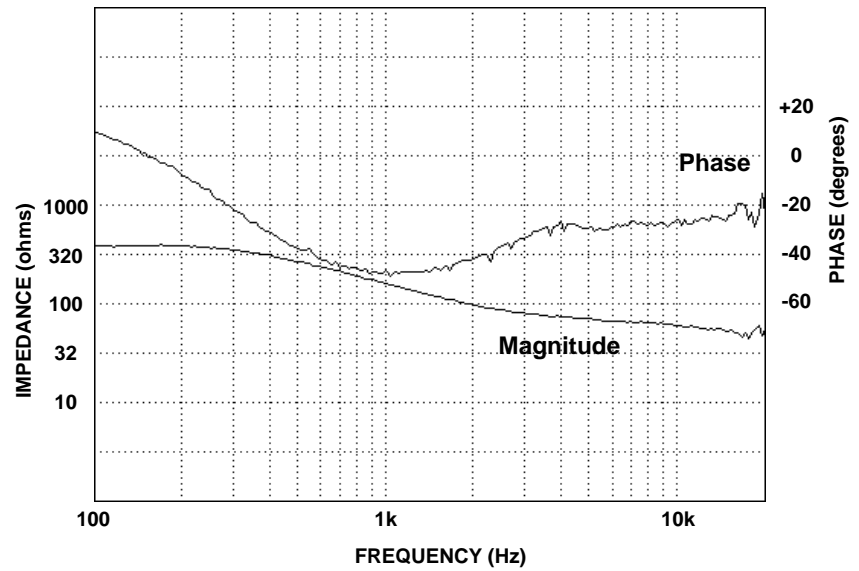

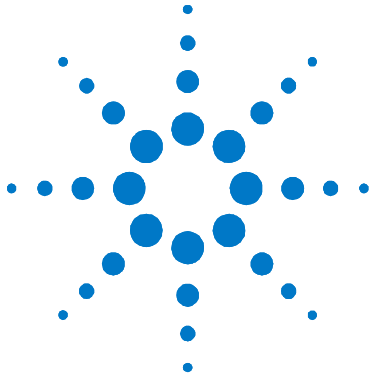

Chapter 4

Agilent E4360A SAS Mainframe

Supplemental Characteristics	22
Outline Diagram	24

Supplemental characteristics are not warranted but are descriptions of performance determined either by design or by type testing. All supplemental characteristics are typical unless otherwise noted.

Supplemental Characteristics

Parameter	E4360A
Command Processing Time	
	≤ 1 ms from receipt of command to start of output change
Savable States	
Memory locations:	2 (0 and 1)
Pre-stored state:	0
Protection Response Characteristics	
INH input:	5 μs from receipt of inhibit to start of shutdown
Fault on coupled outputs:	< 10 μs from receipt of fault to start of shutdown
Digital Control Characteristics	
Maximum voltage ratings:	+16.5 VDC/– 5 VDC between pins (pin 8 is internally connected to chassis ground).
Pins 1 and 2 as FLT output:	Maximum low-level output voltage = 0.5 V @ 4 mA Maximum low-level sink current = 4 mA Typical System-level leakage current = 1 mA @ 16.5 VDC
Pins 3 - 7 as digital/trigger outputs: (pin 8 = common)	Maximum low-level output voltage = 0.5 V @ 4 mA; 1 V @ 50 mA; 1.75 V @ 100 mA Maximum low-level sink current = 100 mA Typical System-level leakage current = 0.8 mA @ 16.5 VDC
Pins 1 - 7 as digital/trigger inputs and pin 3 as INH input: (pin 8 = common)	Maximum low-level input voltage = 0.8 V Minimum System-level input voltage = 2 V Typical low-level current = 2 mA @ 0 V (internal 2.2k pull-up) Typical System-level leakage current = 0.12 mA @ 16.5 VDC
Interface Capabilities	
GPIB:	SCPI - 1993, IEEE 488.2 compliant interface
LXI compliance:	Class C (only applies to units with LXI label on front panel)
USB 2.0:	Requires Agilent IO Library version M.01.01 or 14.0 and up
10/100 LAN:	Requires Agilent IO Library version L.01.01 or 14.0 and up
Built-in Web server:	Requires Internet Explorer 5+ or Netscape 6.2+
Environmental Conditions	
Operating environment:	Indoor use, installation category II (for AC input), pollution degree 2
Temperature range:	0°C to 55°C (output current is derated above 40°C ambient temperature)
Relative humidity:	Up to 95%
Altitude:	Up to 2000 meters
Storage temperature:	-30°C to 70°C

Supplemental Characteristics (continued)

Parameter	E4360A
Regulatory Compliance	
EMC:	Complies with European EMC Directive for test and measurement products. <ul style="list-style-type: none">• IEC/EN 61326-1• CISPR 11, Group 1, class A• AS/NZS CISPR 11• ICES/NMB-001 Complies with Australian standard and carries C-Tick mark. This ISM device complies with Canadian ICES-001. Cet appareil ISM est conforme à la norme NMB-001 du Canada.
Safety:	Complies with European Low Voltage Directive and carries the CE-marking. Conforms to UL 61010-1 and CSA C22.2 61010-1.
Acoustic Noise Declaration	
This statement is provided to comply with the requirements of the German Sound Emission Directive, from 18 January 1991.	Sound Pressure Lp <70 dB(A), At Operator Position, Normal Operation, According to EN 27779 (Type Test). Schalldruckpegel Lp <70 dB(A), Am Arbeitsplatz, Normaler Betrieb, Nach EN 27779 (Typprüfung).
AC Mains	
Input ratings:	~ 100 VAC – 240 VAC; 50/60/400Hz
Power consumption:	1440 VA (@ <, 180 VAC input) 2200 VA (@ >, 180 VAC input)
Power factor: NOTE 1	0.99 @ nominal input and rated power
AC line spike rating:	1 kV typical
Fuse:	15A / 250 VAC non-time delay (Agilent p/n 2110-0054)
100-180 VAC Note: AC mains circuits rated at nominal 100-180 VAC cannot supply enough current to power the E4360A mainframe when two output modules are installed. In this case, internal circuits will limit the output current of the modules to one half of their rating. For a single installed module, full output current will be available at nominal 100-180 VAC.	
Dimensions	
Height:	88.1 mm / 3.5 in.
Width:	432.5 mm / 17.03 in.
Depth including handles:	633.9 mm / 24.96 in.
Net Weight	
E4360A with 2 output modules:	17.6 kg / 38.4 lbs.
Single output module:	3.3 kg / 7.2 lbs.

¹ Under full load at 400 Hz, power factor drops from 0.99 @ 120 VAC to as low as 0.76 @ 265 VAC. Power factor degrades further under no load conditions.

Outline Diagram

