

MAFL-010256-CB0AD0



MoCA Band Pass Filter 1125 - 1550 MHz

Rev. V1

Features

- 75 Ohm
- SMT unit
- RoHS* Compliant
- Pb Free


Description

- M/A-COM Technology Solutions's MAFL-010256-CB0AD0 is a surface mount Band-Pass Filter unit designed for MoCA applications.

Product Image



Functional Schematic

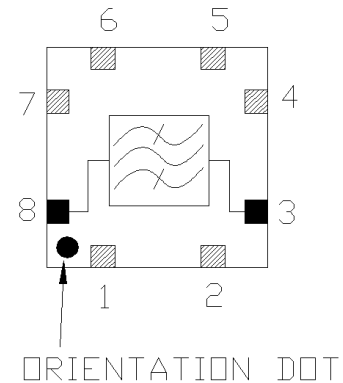

Pin Configuration

Function	Pin Number
Input Port	8
Band-Pass Port	3
Ground	1, 2, 4 - 7
Not connected	-

Recommended Maximum Ratings^{1 2}

Parameter	Value
Storage Temperature	-40°C to +85°C
Operating Temperature	-40°C to +85°C
DC Current	30mA
RF Power	250mW

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM Technology Solutions does not recommend sustained operation near these survivability limits.

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$

Parameter	Unit	Typ	Min	Max
Insertion Loss 1125 - 1550 MHz	dB	1.7	-	2.0
Stopband Rejection 5 - 300 MHz	dB	53	50	-
300 - 800 MHz	dB	44	40	-
800 - 1002 MHz	dB	40	38	-
2250 - 3000 MHz	dB	35	33	-
Input Port Return Loss 1125 - 1200 MHz	dB	12.5	11	-
1200 - 1550 MHz	dB	11	10	-


¹ * Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.



Outline Drawing: SM-173

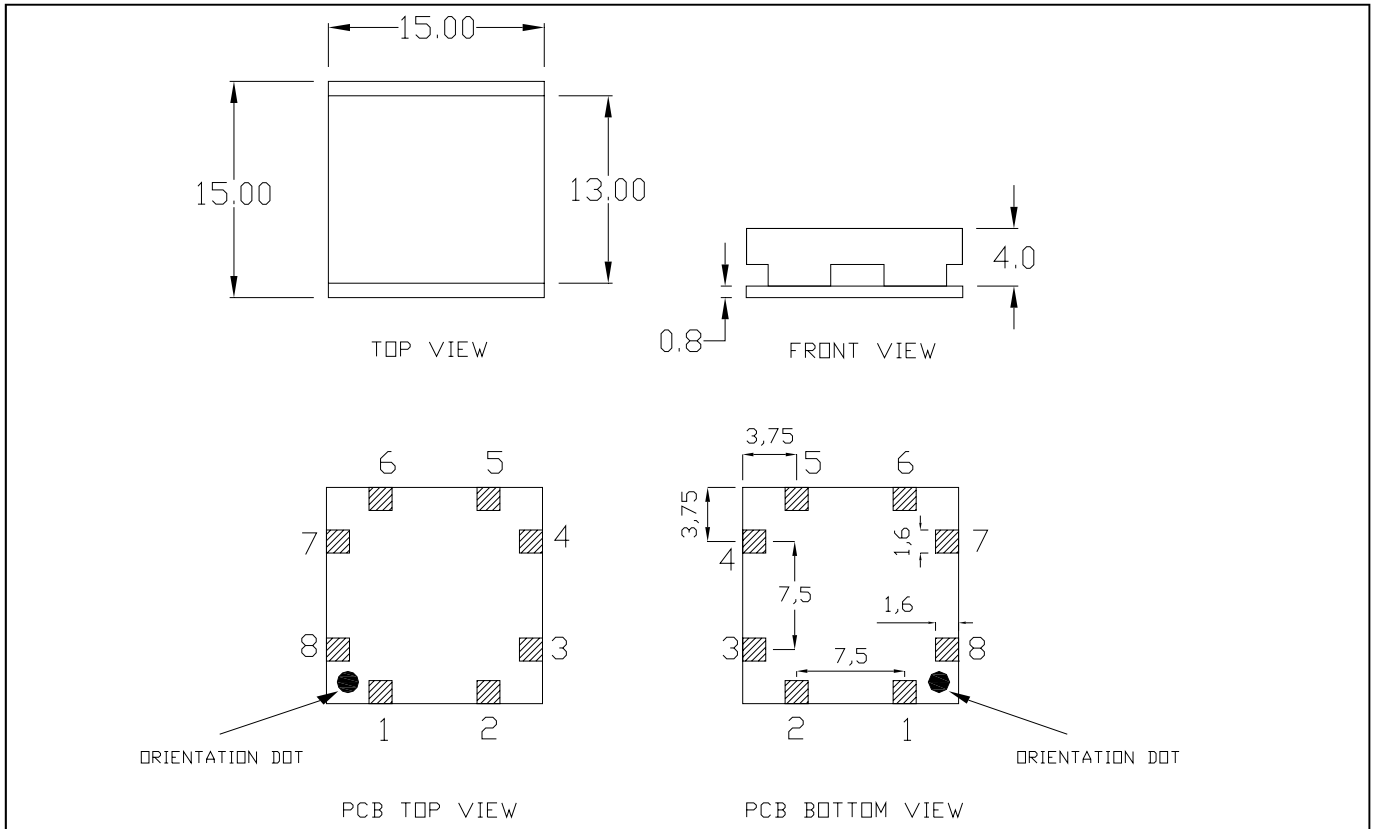

* Dimensions are millimeters ± 0.2 unless otherwise specified., Drawing not to scale.

Recommended PCB Configuration


- Track dimension = 1.1mm
- Gap dimension = 1.2mm
- It is not recommended to run tracks under the filter unless they are greater than 1.6mm below the base.
- Ground should be 1.6mm below the base of the filter
- Area directly under the filter should be free from copper
- RF shield should be kept a minimum of 6mm above the filter

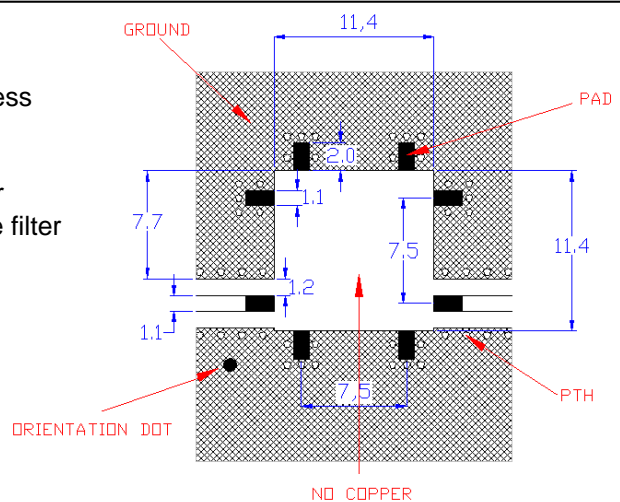


* Dimensions are millimeters ± 0.1 unless otherwise specified.

Typical Performance Curves at +25°C

Insertion Loss

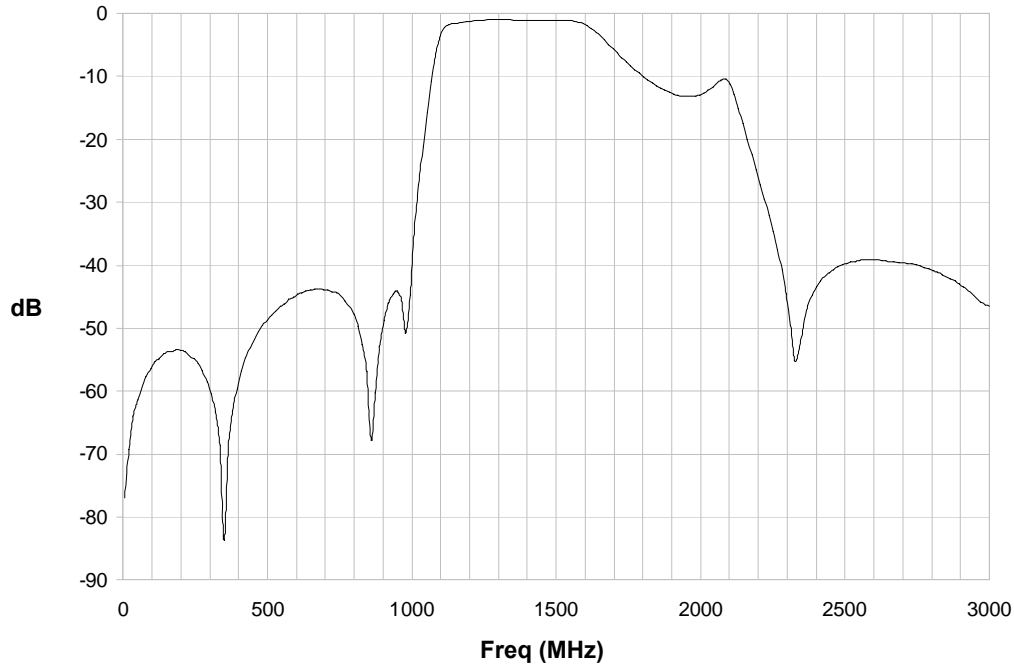

Return Loss

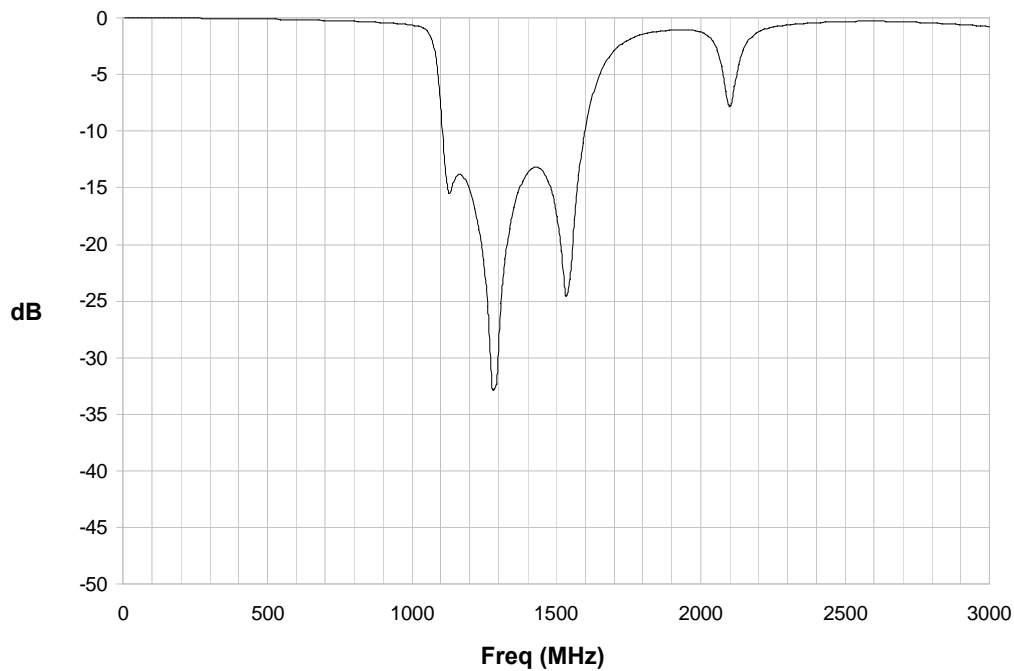


MAFL-010256-CB0AD0



MoCA Band Pass Filter
1125 - 1550 MHz

Rev. V1

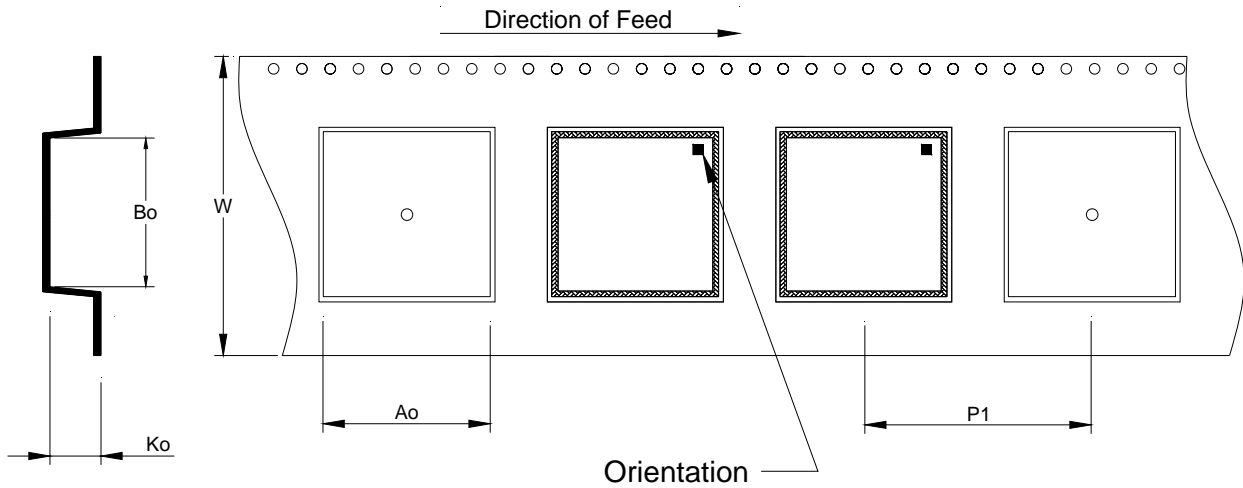

Item	Dimension
Ao	15.40mm +/- 0.1mm
Bo	15.40mm +/- 0.1mm
Ko	5.40mm +/- 0.1mm
W	32.00mm +/- 0.3mm
P1	20.00mm +/- 0.1mm

Ordering Information

Part Number	Package
MAFL-010256-CB0AD0	500pcs Reel
MAFL-010256-CB0ATB	Customer Evaluation Board