

Infrared detector modules with preamps



Metal dewar type

High sensitivity modules of easy-to-use

These devices combine a dewar type detector with a compatible preamplifier, and easily operate to detect infrared radiation just by connecting to a DC power supply. InGaAs and InSb detectors are provided as standard devices (liquid nitrogen cooling). Custom-designed devices with different active areas, FOV or amplifier gain, etc. are also available to meet your specific needs.

Features

- **Compact integral detector unit**
- **Optimum connections between the detector element and pre-amplifier allow amplified signals to be easily obtained.**

Required power supply specifications

- G7754 series, P7751 series: ± 15 V (± 12.0 to ± 17.5 V can also be used)
- Current capacity: 1.5 times or more of each module's maximum current consumption
- Ripple noise: 5 mVp-p or less
- Analog power supply only
- Recommended DC power supplies:
E3620A, E3630A (Agilent Technologies)

Applications

- **Infrared detection**

Accessories

- **Cable (for DC power supply):**
2 m (connector installed at one end) **A4372-02**
- **BNC-BNC coaxial cable (for signal output): 2 m**
- **Instruction manual**

Specifications / Absolute maximum ratings

Type No.	Detector element	Active area (mm)	External power supply*1				Absolute maximum ratings		
			Supply voltage (V)			Supply capacitance (mA)	External input voltage (V)	Operating temperature T _{opr} (°C)	Storage temperature T _{stg} (°C)
			Min.	Typ.	Max.				
G7754-01	InGaAs	φ1	±12.0	±15.0	±17.5	±23	±18	0 to +40	-20 to +50
G7754-03		φ3							
P7751-01	InSb (P5968-060)	φ0.6							
P7751-02	InSb (P5968-200)	φ2							

*1: Use only an analog power supply.

Note: Exceeding hold time: 12 hours or more (at the time of shipment)

Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

Electrical and optical characteristics (Typ.)


Type No.	Measurement condition Element temperature T (°C)	Peak sensitivity wavelength λ_p (μm)	Cut-off wavelength λ_c (μm)	Photo sensitivity S $\lambda = \lambda_p$ *2 (V/W)	Noise equivalent power NEP $\lambda = \lambda_p$ (W/Hz ^{1/2})	Cutoff frequency fc (Hz)	Output impedance (Ω)	Maximum output voltage RL=1 k Ω (V)	Maximum current consumption*3 (mA)
G7754-01	-196	2.0	2.4	2×10^9	3×10^{-14}	2 to 500	50	± 10	± 15
G7754-03				5×10^8	1.5×10^{-13}	2 to 500		± 10	± 15
P7751-01*4		5.3	5.5	3×10^8	3×10^{-13}	5 to 10000		± 10	± 20
P7751-02*4				1.5×10^8	1×10^{-12}	5 to 12000		± 10	± 20

*2: f=100 Hz (G7754-01, G7754-03), f=1.2 kHz (P7751-01, P7751-02)

*3: Vs= ± 15 V


*4: FOV=60°

Spectral response

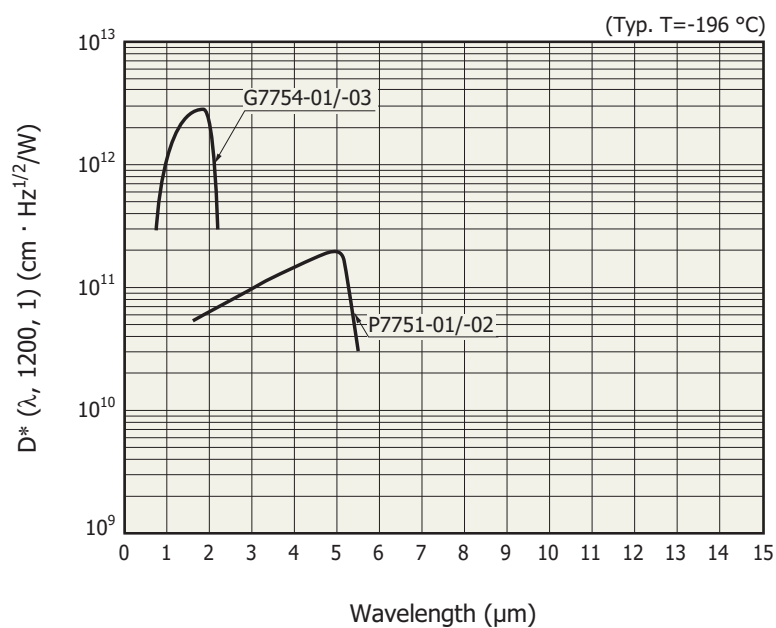



KIRDB0076EF

Dimensional outline (unit: mm)

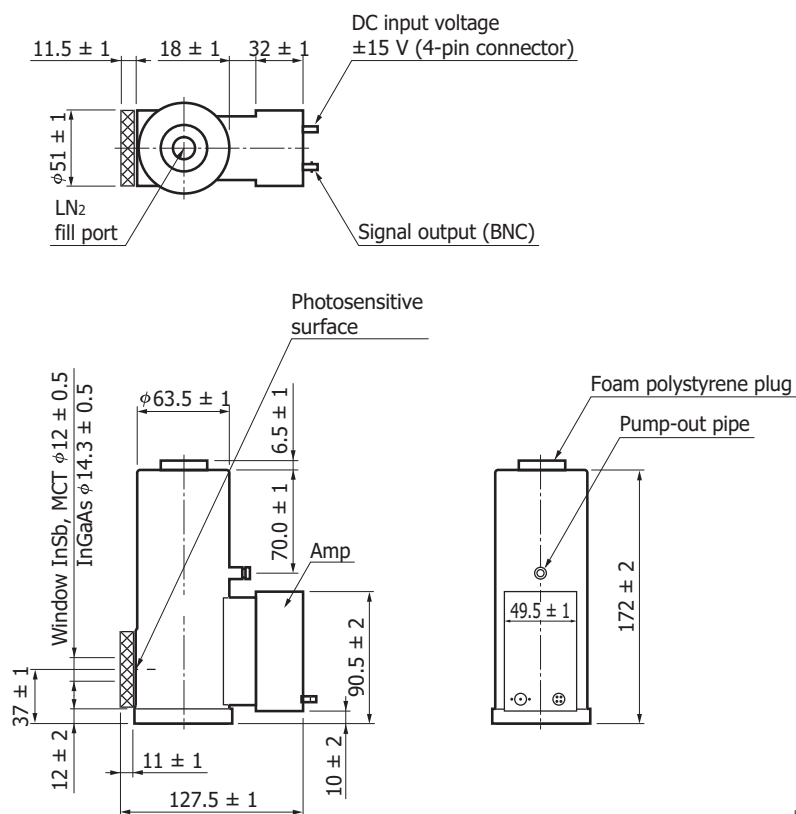

KIRDA0010EE

Cable (for DC power supply) A4372-02

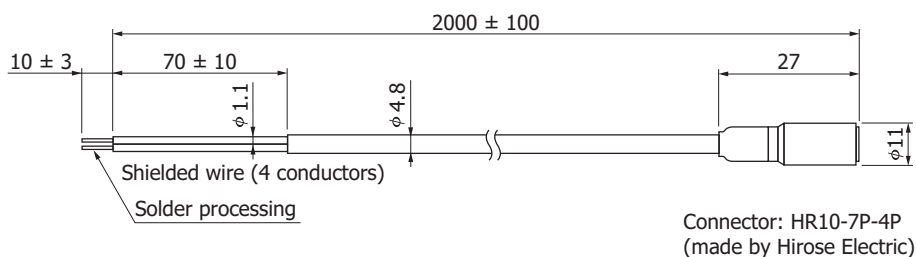

Pin no.	Pin connection	Lead color
①	-Vs	Blue
②	GND	Black/white/blue stranded wire
③	GND	
④	+Vs	White

KIRDA0196EB

Precaution for use

- The detector should not be placed horizontally during use.
- Using these detectors in an environment subjected to vibration may cause microphonic noise. Take measures to prevent vibration as needed.



The P7751-01 conforms to European EMC directives:
EN 61326-1 Class B.

Information described in this material is current as of November, 2012.

Product specifications are subject to change without prior notice due to improvements or other reasons. Before assembly into final products, please contact us for the delivery specification sheet to check the latest information.

Type numbers of products listed in the delivery specification sheets or supplied as samples may have a suffix "(X)" which means preliminary specifications or a suffix "(Z)" which means developmental specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use.

Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

HAMAMATSU

www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 8152-375-0, Fax: (49) 8152-265-8

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Thorshamnsgatan 35 16440 Kista, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1 int. 6, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

China: Hamamatsu Photonics (China) Co., Ltd.: 1201 Tower B, Jiaming Center, No.27 Dongsanhuan Beilu, Chaoyang District, Beijing 100020, China, Telephone: (86) 10-6586-6006, Fax: (86) 10-6586-2866