



Agilent N2887A and N2888A InfiniiMax Soft touch Probe Head

Data Sheet

Introduction

Agilent has developed connectorless logic analyzer probes based on Soft touch probing technology. Connectorless logic analyzer probing removes the connector that is traditionally attached to the target board and replaces it with an array of probe pods. This reduces the probe load on the target by eliminating the loading associated with the physical body of the connector.

The N2887A and N2888A InfiniiMax Soft touch probe heads adapt from the Agilent Pro Series (N2887A) or Half-channel (N2888A) Soft Touch Connectorless Logic Analyzer footprint to the GPO input connectors of the Agilent InfiniiMax 1130A-1134A and 1168A-1169A Series probe amplifier, enabling users to perform high bandwidth (up to 4 GHz), high density, multi-channel probing. The InfiniiMax Soft touch probe heads offer significant benefits in reliability, ease-of-use and space savings provided by the Soft touch probing technology and the award-winning InfiniiMax active probes. Each adapter can support both the Soft Touch single-ended and differential footprints and pin-outs. The support of both single-ended and differential signals is achieved by either plugging a single-ended channel (one connector) into the “+”



***N2887A InfiniiMax Soft touch
Pro probe head***

input of the InfiniiMax amplifier or by plugging the differential complements (2 connectors) into the appropriate “+” and “-” inputs of the InfiniiMax amplifier. There exists a 1:1 mapping of Soft-touch signal and clock lines to InfiniiMax amplifier input GPO connectors—a total of 36 or 18 GPO connectors is necessary to support the possible configurations for N2887A and N2888A respectively.

The probe adapter attaches to the PC board using a retention module which ensures pin-to-pad alignment and holds the probe in place. A kit of five retention modules is shipped with




***N2888A InfiniiMax Soft touch half-
channel probe head***

each InfiniiMax Soft touch probe head. Additional kits can be ordered using Agilent part numbers, E5405-68702 for Soft touch Pro probe head and E5396-68702 for Soft touch Half-channel probe head.

Refer to the “Agilent Technologies E5400-Pro Series Soft Touch Connectorless Probes” user’s guide with the Agilent literature number E5404-97006 for details of the Pro Series and Half-channel pin-outs, footprint dimensions, keep-out areas, et cetera.



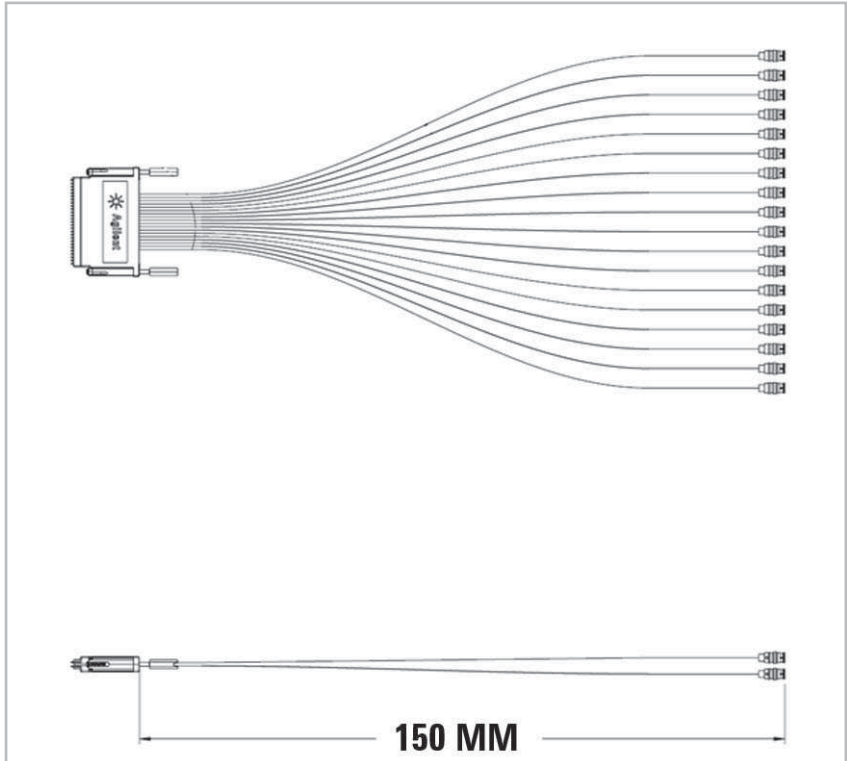

Characteristics

Bandwidth(-3dB)	4 GHz
Flatness	+/- 5%
Single Ended Equivalent Load Capacitance	<1 pF
Differential Equivalent Load Capacitance	<0.5 pF
Single Ended Input Impedance	25 k Ω
Differential Input Impedance	50 k Ω
Channel to Channel Coupling	<-35 dB to 1.7 GHz, <-20 dB to 4 GHz
Channel to Channel skew*	<15 psec (typical)
Compatible Agilent InfiniiMax probes	1130A, 1131A, 1132A, 1134A, 1168A and 1169A

*Use N2887-60002 deskew and performance verification fixture to eliminate timing skew between channels.

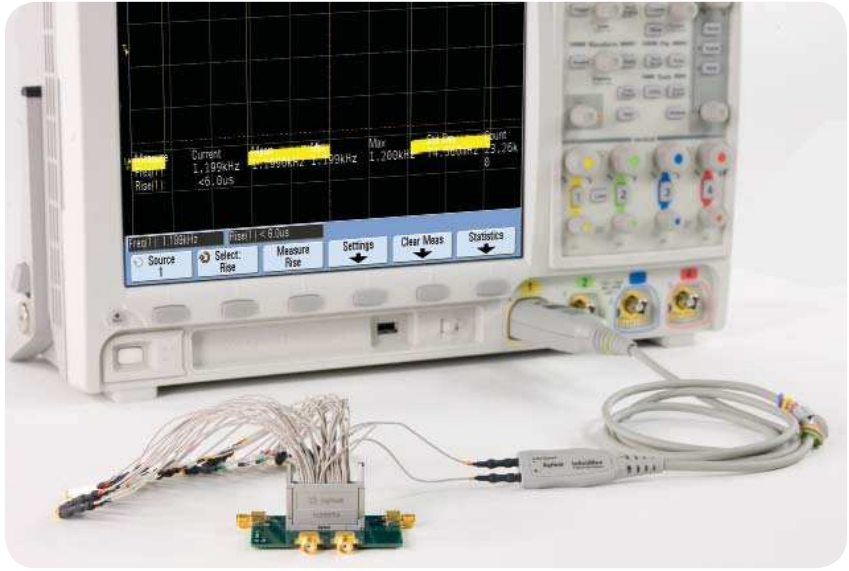


Figure 1 The N2887A InfiniiMax Soft touch Pro probe head (the InfiniiMax probe amplifier is not included)

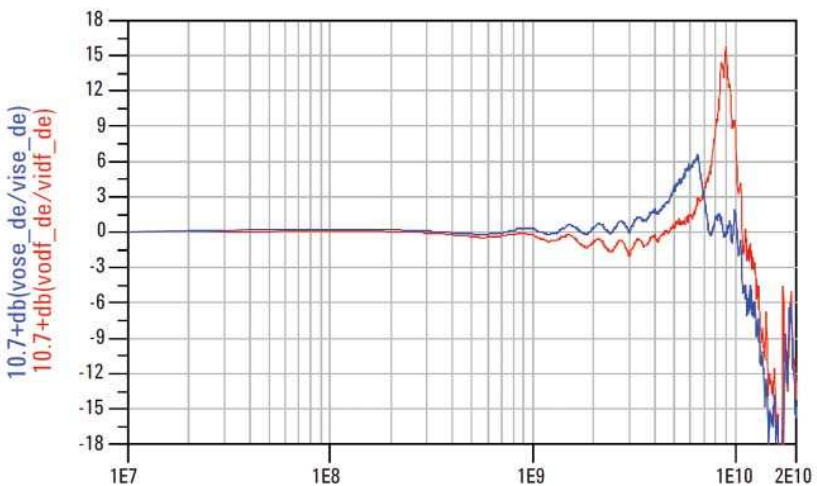


Figure 2 Frequency response of the N2887A, red = Single-ended, blue = Differential

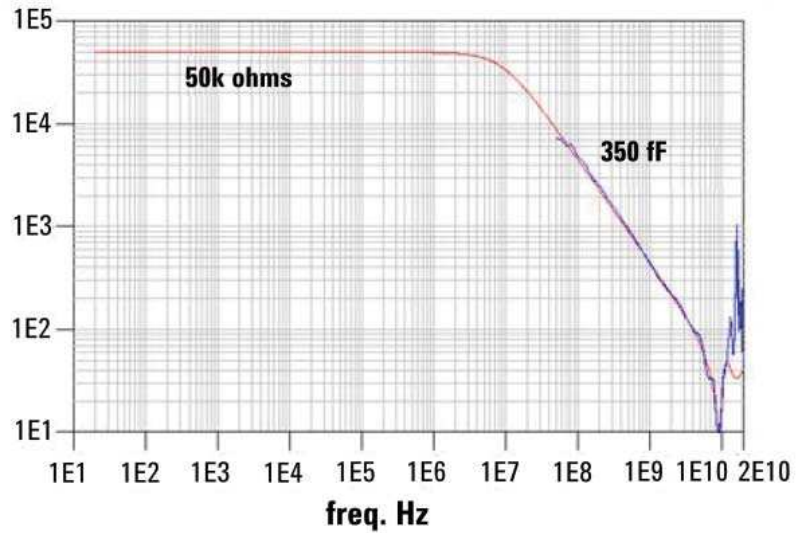


Figure 3 Differential Input Impedance plot, input C = ~0.72 pF



Figure 4 Time domain differential probe response, purple = input of the probe, green = probe output, using Agilent 1169A InfiniiMax probe and DS081304B 13 GHz oscilloscope



Figure 5 Time domain single-ended probe response, purple = input of the probe, green = probe output, using Agilent 1169A InfiniiMax probe and DS081304B 13 GHz oscilloscope

N2887A Soft Touch Pro-to-InfiniiMax Adapter Pin-Out

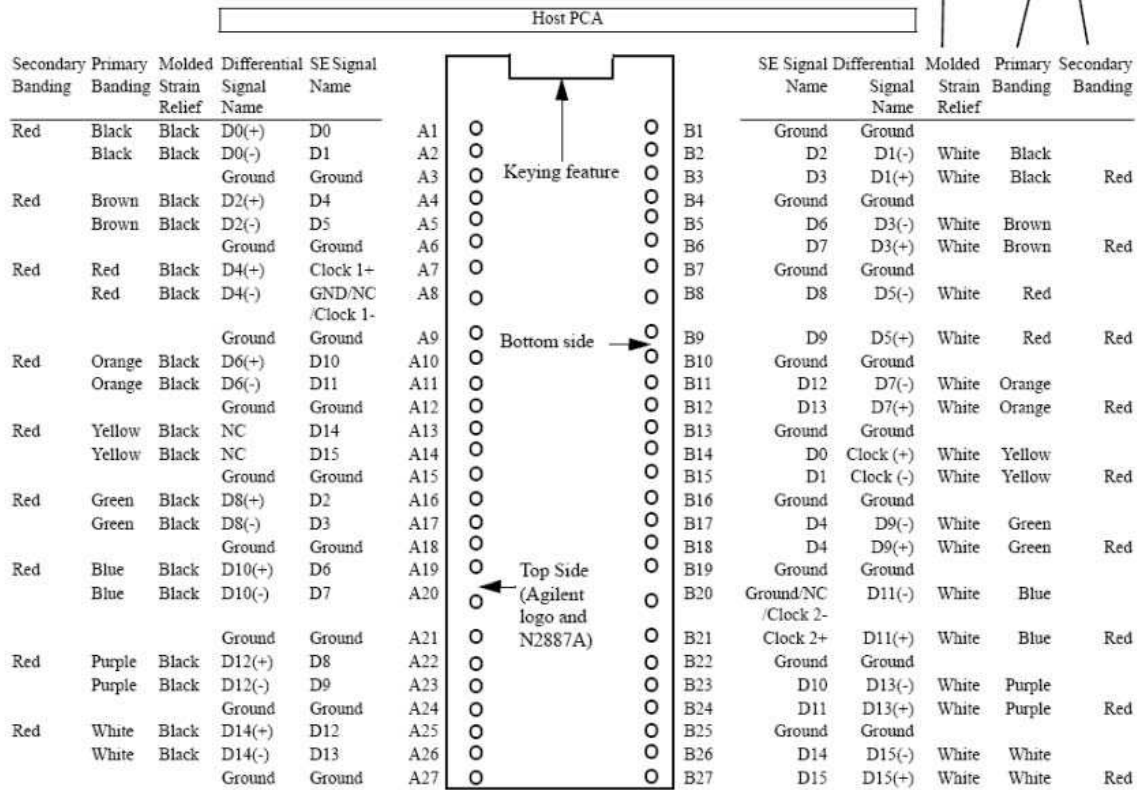


Figure 6 Pin assignment map of the N2887A InfiniiMax Soft touch Pro adapter

N2888A Soft Touch Half Channel-to-InfiniiMax Adapter Pin-Out

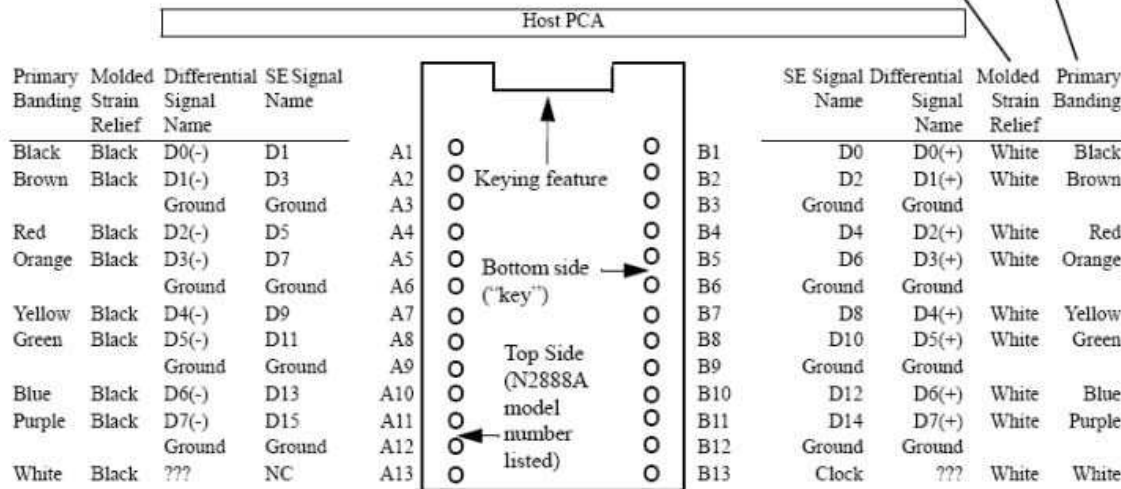


Figure 7 Pin assignment map of the N2888A InfiniiMax Soft touch half-channel adapter

Ordering Information

Product number	Description	Notes
N2887A	InfiniiMax Soft touch Pro Probe Head	
N2888A	InfiniiMax Soft touch Half-channel Probe Head	
E5405-68702	Soft Touch Pro Retention Module Kit	
E5396-68702	Soft Touch Half-channel Retention Module Kit	
N2887-60002	Deskew and Performance Verification Fixture	



Agilent Technologies Oscilloscopes

Multiple form factors from 20 MHz to >90 GHz | Industry leading specs | Powerful applications

 **Agilent Email Updates**

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.



www.lxistandard.org
LXI is the LAN-based successor to GPIB, providing faster, more efficient connectivity. Agilent is a founding member of the LXI consortium.

Agilent Channel Partners

www.agilent.com/find/channelpartners
Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. We share measurement and service expertise to help you create the products that change our world. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair, reduce your cost of ownership, and move us ahead of your development curve.

www.agilent.com/find/advantageservices



www.agilent.com/quality

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3500
Latin America	305 269 7500
Mexico	01800 5064 800
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

Europe & Middle East

Austria	43 (0) 1 360 277 1571
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201

Other European Countries:

www.agilent.com/find/contactus

Revised: July 8, 2010

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2011
Printed in USA, February 25, 2011
5990-6481EN

