

# Energy Management

## Energy Analyzer

### Type EM11 DIN



• Other versions available (not certified, option X): see “how to order” on the next page

- Class 1 (kWh) according to EN62053-21
- Class B (kWh) according to EN50470-3
- Class 2 (kvarh) according to EN62053-23
- Accuracy ±0.5 RDG (current/voltage)
- Energy analyzer
- Instantaneous variables readout: 4 DGT
- Energies readout: 6 DGT
- Instantaneous variables: V, A, W, Wdmd, Wdmd max, var, PF, Hz
- Single phase variables: VLL, VLN, A, VA, W, var, PF
- Energy measurements: total kWh and kvarh
- TRMS measurements of distorted sine waves (voltages/currents)
- Self power supply
- Dimensions: 1-DIN module
- Protection degree (front): IP40
- 1 pulse output on request
- 1 alarm output on request
- Certified according to MID Directive (option PF only): see “how to order” below

### Product Description

One-phase energy analyzer with built-in configuration push button and LCD data displaying; particularly indicated for active and reactive energy metering and for cost allocation. Housing for DIN-rail mounting, IP40 (front) protection degree. Direct

connection up to 32A. Moreover the meter can be provided with either pulse output proportional to the active energy being measured or alarm control on the available instantaneous variables.



Certified according to MID Directive, Annex "B" + Annex "D" for legal metrology relevant to active electrical energy meters (see Annex MI-003 of MID). Can be used for fiscal (legal) metrology.

### How to order **EM11 DIN AV8 1 X O1 PF**

Model

Range code

System


Power supply

Output

Option

### Type Selection

Range code	System	Power supply	Option
<b>AV8:</b> 230V <sub>LN</sub> AC - 5(32)A (direct connection)	<b>1:</b> 1-phase  <b>Output</b>  <b>O1:</b> Pulse type (open collector output)	<b>X:</b> Self power supply (from 48 to 62Hz). The instrument works on the range from -20% to +20% of the measuring input nominal voltage.	<b>PF:</b> Certified according to MID Directive, Annex "B" + Annex "D" for legal metrology relevant to active electrical energy meters (see Annex MI-003 of MID). Can be used for fiscal (legal) metrology.

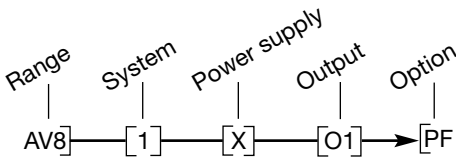

**NOTE:** please check the availability of the needed code on the verification path diagram on left before order.



STANDARD

Not certified according to MID directive. Cannot be used for fiscal (legal) metrology.



How to order EM11 DIN AV8 1 X O1 X

Model \_\_\_\_\_  
Range code \_\_\_\_\_  
System \_\_\_\_\_  
Power supply \_\_\_\_\_  
Output \_\_\_\_\_  
Option \_\_\_\_\_

Type Selection

Range code	System	Power supply	Option
<b>AV7:</b> 120V <sub>LN</sub> AC - 5(32)A (direct connection)	<b>1:</b> 1-phase	<b>X:</b> Self power supply (from 48 to 62Hz). The instrument works on the range from -20% to +20% of the measuring input nominal voltage.	<b>X:</b> none
<b>AV8:</b> 230V <sub>LN</sub> AC - 5(32)A (direct connection)	<b>Output</b>		
	<b>O1:</b> Pulse type (open collector output)		
	<b>R1:</b> Alarm type (relay output)		

NOTE: please check the availability of the needed code on the verification path diagrams below before order.

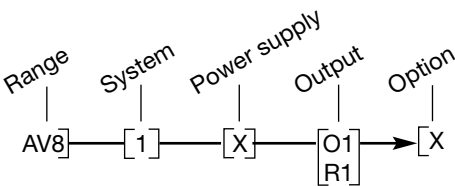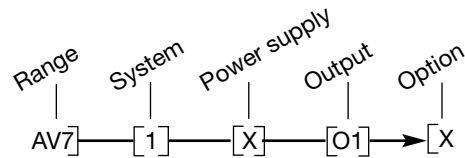

## Input specifications

<b>Rated inputs</b> Current range (by shunt) Voltage range	System: 1 AV7 and AV8: 5(32)A AV7: 120 VLN AC AV8: 230 VLL AC	Instantaneous variables read-out  Min. Max. indication  Energies	4 DGT (V and A) 3 DGT (W, var, Wdmd, Wdmd max, Hz, PF) Max. 9 999; Min. 0 (0.0) Total: 6 DGT
<b>Accuracy</b> (Display) (@25°C ±5°C, R.H. ≤60%, 48 to 62Hz) AV7 model  AV8 model  Current  Voltage  Frequency Active power Reactive power Active energy  Reactive energy  Reference values  Start up current:	Ib: 5A, Imax: 32A; Un: 120VLN (-20% +20%) Ib: 5A, Imax: 32A; Un: 230VLN (-20% +20%) From 0.04Ib to 0.2Ib, PF=1: ±(0.5% RDG +3DGT) From 0.2Ib to Imax, PF=1: ±(0.5% RDG +1DGT). In the Un range: ±(0.5% RDG +2DGT) ±0.1Hz (48 to 62Hz) ±(1%RDG +2DGT) ±(2%RDG +2DGT) Class 1 according to EN62053-21 and Class B according to EN50470-3. Class 2 according to EN62053-23. Ib: 5A, Imax: 32A, 0.1 Ib: 0.5A 20mA	<b>LEDs</b>  <b>Measurements</b>  Method  Coupling type <b>Crest factor</b> <b>Current Overload</b> Continuous For 10ms <b>Voltage Overload</b> Continuous For 500ms <b>Input impedance</b> 120VL-N (AV7) 230VL-N (AV8) 5(32) A (AV7-AV8) <b>Frequency</b> <b>Key-pad</b>	Red LED (Energy consumption), 1000 pulses/kWh (Max Frequency 16 Hz) according to EN62053-11  See "Measuring variables and Min. Max. indications" TRMS measurements of distorted wave forms Direct Ib 5A ≤4 (45A max. peak)  32A, @ 50Hz 960A, @ 50Hz  1.2 Un 2 Un  >720KΩ >720KΩ < 0.5VA  48 to 62 Hz  1 push-button for variable selection and programming of the instrument working parameters. Not available in case of "PF" option.
<b>Energy additional errors</b> Influence quantities	According to EN62053-21, EN62053-23		
<b>Temperature drift</b>	≤200ppm/°C		
<b>Sampling rate</b>	4096 samples/s @ 50Hz 4096 samples/s @ 60Hz		
<b>Display refresh time</b>	1 sec.		
<b>Display</b> Type	1 line (max: 6 DGT) LCD, h 7mm		

## Output specifications

<b>Digital output</b> Number of outputs X Option  PF option Signal  Pulse duration  Insulation	1, open collector programmable, from 0.001 to 1 kWh for each pulse. Fixed, 0,001 kWh/pulse V <sub>ON</sub> 1.2 VDC/ max. 100 mA V <sub>OFF</sub> 30 VDC max. ≥100ms < 120msec (ON), ≥120ms (OFF), according to EN62052-31 By means of optocouplers, 4000 VRMS output to measuring inputs	Alarm modes Controlled variables  Set-point adjustment  Hysteresis  On-time delay Off-time delay Min. response time  Insulation	DC 13-1.5A @ 24VDC Up alarm or down alarm kW, kWdmd, kvar, PF, A, V, Hz  Programmable on all the measuring range (see "Measuring variables and Min. Max. indications") programmable on all the measuring range (see "Measuring variables and Min. Max. indications") 0 to 9999s (166min) 0 to 9999s (166min) 1s, set-point on-time delay: "0 s" 4000 VRMS output to measuring inputs
<b>Alarm output</b>  Number of outputs Type	Not available in case of PF option. 1 Relay, SPST type AC 1-5A @ 250VAC DC 12-5A @ 24VDC AC 15-1.5A @ 250VAC		

## Software functions (Not available in case of PF option)

<b>Password</b>	Numeric code of max. 4 digits; 2 protection levels of the programming data: Password "0", no protection; Password from 1 to 9999, all data are protected	<b>Displaying</b>	1 variable per page (See «Measuring variables and Min. Max. indications»)
		<b>Reset</b>	By means of the front key-pad: - W dmd max; - energies: kWh, kvarh

## General specifications


<b>Operating temperature</b>	-25°C to +55°C (-13°F to 131°F) (R.H. from 0 to 90% non-condensing @ 40°C) according to EN62053-21, EN50470-1 and EN62053-23	<b>Surge</b>	On current and voltage measuring input circuits: 4kV; According to CISPR 22
<b>Storage temperature</b>	-30°C to +70°C (-22°F to 140°F) (R.H. < 90% non-condensing @ 40°C) according to EN62053-21, EN50470-1 and EN62053-23	<b>Radio frequency suppression</b>	According to CISPR 22
<b>Installation category</b>	Cat. III (IEC60664, EN60664)	<b>Standard compliance</b>	
<b>Insulation (for 1 minute)</b>	4000 VRMS between measuring inputs and digital output (O1 and R1).	<b>Safety</b>	IEC60664, IEC61010-1 EN60664, EN61010-1 (EN62052-11) EN50470-1, EN62053-21, EN62053-23, EN50470-3.
<b>Dielectric strength</b>	4000 VRMS for 1 minute	<b>Metrology</b>	DIN43864, IEC62053-31
<b>CMRR Noise rejection</b>	100 dB, 48 to 62 Hz	<b>Pulse output Approvals</b>	CE, cULus (X option) MID (PF option)
<b>EMC</b>	According to EN62052-11	<b>Connections</b>	Screw-type
Electrostatic discharges	8kV air discharge;	Cable cross-section area	Measuring inputs: min. 2.5 mm <sup>2</sup> , max. 10 mm <sup>2</sup> ; Min./Max. screws tightening torque: 0.5 Nm / 1.1 Nm Other terminals: 1.5 mm <sup>2</sup> . Screws tightening torque: 0.5 Nm
Immunity to irradiated electromagnetic fields	Test with applied current: 10V/m from 80 to 2000MHz; Test without any applied current: 30V/m from 80 to 2000MHz;	<b>DIN Housing</b>	
Burst	On current and voltage measuring input circuits: 4kV	Dimensions (WxHxD)	17.5 (+0.5 -0) x 90 x 67.5 mm
Immunity to conducted disturbances	10V/m from 150KHz to 80MHz	Material	Nylon PA66, self-extinguishing: UL 94 V-0 DIN-rail
		<b>Mounting</b>	
		<b>Protection degree</b>	
		Front	IP40
		Screw terminals	IP20
		<b>Weight</b>	Approx. 100 g (packing included)

## Power supply specifications


<b>Self supplied version</b>	120VLN (AV7), 230 VLN (AV8) (-20% +20%) 48-62Hz	<b>Power consumption</b>	≤ 3VA
------------------------------	--	--------------------------	-------

## Accuracy (according to EN50470-3 and EN62053-23)

kWh, accuracy (RDG) depending on the current

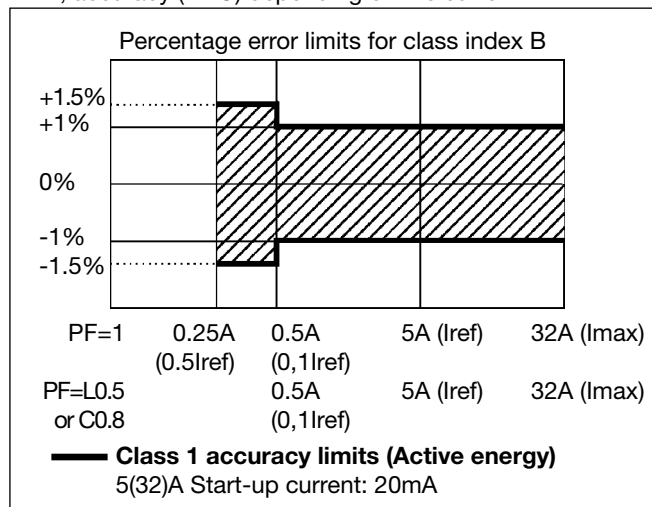

kvarh, accuracy (RDG) depending on the current

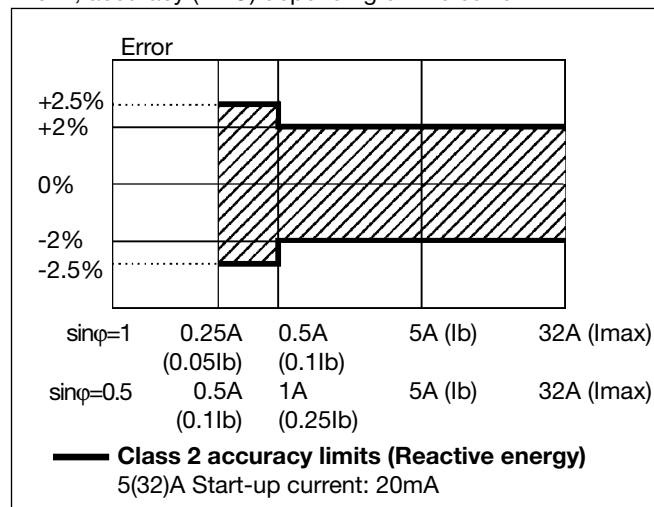

## MID "Annex MI-003" compliance (PF option only)

Accuracy

0.9 Un ≤ U ≤ 1.1 Un;  
0.98 fn ≤ f ≤ 1.02 fn;  
fn: 50 or 60Hz;  
cosφ: 0.5 inductive to 0.8 capacitive.  
Class B  
I st: 0.02A; I min: 0.25A;  
I tr: 0.5A; I ref: 5A;  
I max: 32A.

Operating temperature

-25°C to +55°C (-13°F to 131°F) (R.H. from 0 to 90% non-condensing @ 40°C)

EMC compliance

E2

Mechanical compliance

M2

Protection degree

in order to achieve the protection against dust and water required by the norms harmonized to MID, the meter must be used only installed in IP51 (or better) cabinets.

## Used calculation formulas

Phase variables

Instantaneous effective voltage

$$V_{1N} = \sqrt{\frac{1}{n} \cdot \sum_{i=1}^n (V_{1N})_i^2}$$

Instantaneous active power

$$W_1 = \frac{1}{n} \cdot \sum_{i=1}^n (V_{1N})_i \cdot (A_1)_i$$

Instantaneous power factor

$$\cos\phi_1 = \frac{W_1}{VA_1}$$

Instantaneous effective current

$$A_1 = \sqrt{\frac{1}{n} \cdot \sum_{i=1}^n (A_1)_i^2}$$

Instantaneous apparent power

$$VA_1 = V_{1N} \cdot A_1$$

Instantaneous reactive power

$$\text{var}_1 = \sqrt{(VA_1)^2 - (W_1)^2}$$

Where: **n**= sample number

Energy metering

$$kWh_1 = \int_{t_1}^{t_2} P_1(t) dt \cong \Delta t \sum_{j=n_1}^{n_2} P_1(j)$$

$$k \text{ var } h_1 = \int_{t_1}^{t_2} Q_1(t) dt \cong \Delta t \sum_{j=n_1}^{n_2} Q_1(j)$$

Where:

**P**= active power;

**Q**= reactive power;

**t<sub>1</sub>, t<sub>2</sub>**=starting and ending time points of consumption recording;

**n<sub>j</sub>**= time unit;

**Δt**= time interval between two successive power consumptions;

**n<sub>1</sub>, n<sub>2</sub>** = starting and ending discrete time points of consumption recording



Measuring variables and Min. Max. indications



Page number	Variable	Min. Max. Indication	Notes
1	kWh		Total (only consumed energy)
		from 0.01 to 999999, autoranging.	
2	kvarh	from 0.0 to 99999.9	Total (only consumed energy)
3	kW	from 0.00 to 9.99	
4	kW dmd	from 0.00 to 9.99	Integration time programmable from 1 to 30 minutes
5	kW dmd max	from 0.00 to 9.99	Max value with data storage (in EEprom)
6	V	from 0.0 to 999.9	
7	A	from 0.0 to 32.00	
8	Hz	from 48.0 to 62.0	
9	PF (cosφ)	from L/C. 00 to L/C. 99	
10	kvar	from 0.00 to 9.99	

**Note:** In case of X option all the variables above can be scrolled using the front push button, in case of PF option the push button is not available and the variables are automatically scrolled.

Insulation between inputs and outputs


	Measuring inputs	Relay output	Open collector output	AC self-power supply
Measuring inputs	-	4kV	4kV	0kV
Relay output	4kV	-	4kV	4kV
Open collector output	4kV	4kV	-	4kV
AC self-power supply	0kV	4kV	4kV	-

Wiring diagrams and relay output (R1)

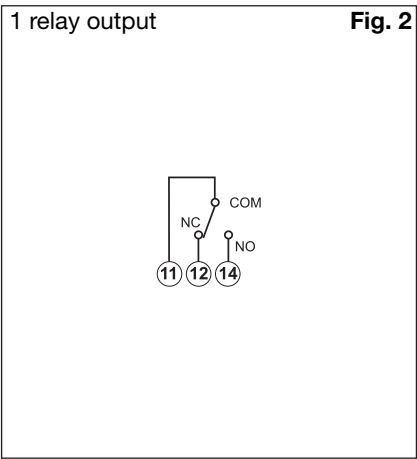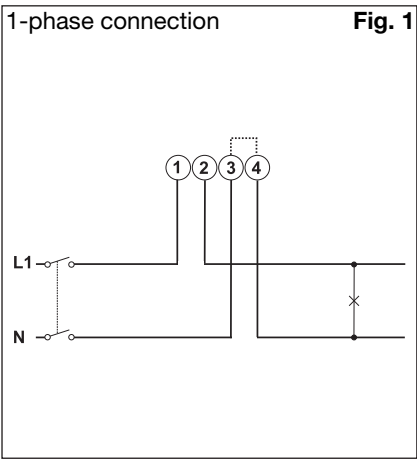


**NOTE:** The 3 and 4 terminals, in the instrument, are wired together

## Wiring diagrams and open collector output (O1)

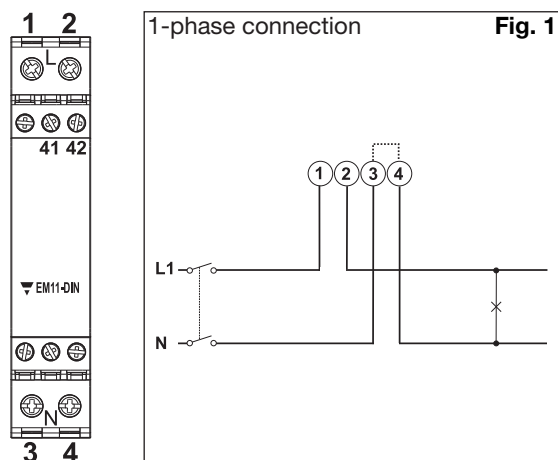


**NOTE:** The 3 and 4 terminals, in the instrument, are wired together

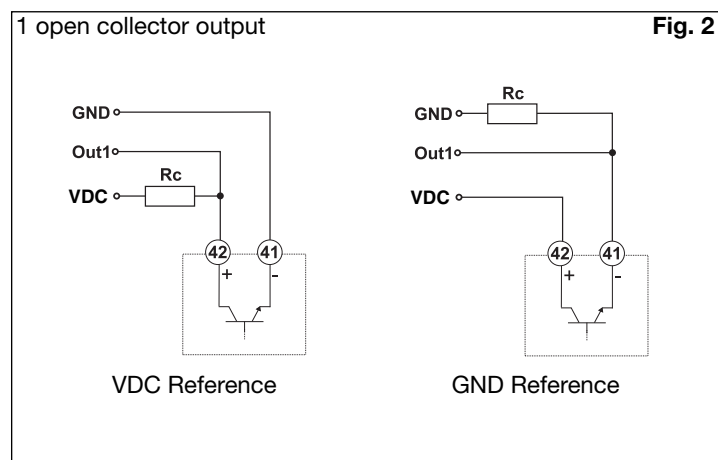

The load resistances ( $R_C$ ) must be designed so that the close contact current is lower than 100mA; the VDC voltage must be lower than or equal to 30VDC.

## Frontal panel description

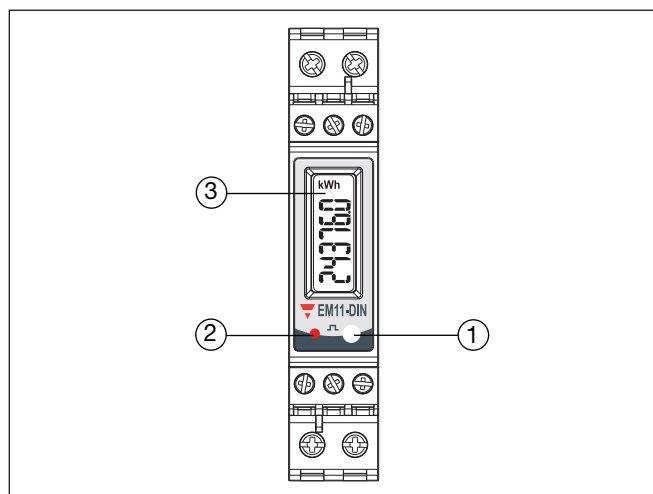

1. **Push button**  
To program the configuration parameters and the display of the variables.  
Not available in case of PF option.
2. **LED**  
Red LED to show the consumed energy.
3. **Display**  
LCD-type with alphanumeric indication to:
  - display configuration parameters;
  - display all the measured variables.

## Dimensions and panel cut-out

