



### Features

- 24Vdc Powered (48Vdc or 85-264Vac/dc option)
- Small , compact, panel mounted and easy to use
- 16 Potential Free Contact Inputs
- Normally Open/Closed Selectable via DIP switch
- 27 Standard Sequences
- Choice of Lamp/Sidebar LED/Backlit LED Display
- User printed legends on inkjet/laser
- Four function Group Alarm output contacts
- Motor Alarm Sequence and Timer options
- Optional internal repeat relay outputs
- Fully "DIP" Switch Configurable
- Optional Serial Port - Modbus/PLC compatible



The Omni-16c annunciator replaces the Omni-16a and b series annunciators with one product offering the option of incandescent lamps, backlit LED or Sidebar LED indicator windows. Omni16c is a panel mounted annunciator with optional integral Test, Silence, Acknowledge, Reset Pushbuttons sacrificing one alarm window or uses an externally wired pushbutton station.

The 16 inputs accept potential free inputs and are individually DIP switch configured for N.O. or N.C. operation. Inputs are wired to terminals at the rear of the annunciator. Optional Inputs boards for com negative (PLC compatible) or fully isolated 19-60Vdc or 90-150 Vac/dc are also available. The alarm sequence for the 16 inputs is also configured by DIP switch with a choice of 27 standard sequences. Four output relays can be

configured as group alarm, horn output and watchdog with a change over contact at the terminals. The group alarm can be set to one of four functions, Follows input, follows alarm, Multiple reflash, Ringback horn.

An Inhibit input is provided to optionally disable all the inputs on the annunciator during startup/maintenance.

Input repeats and Lamp repeats are available using an optional ribbon header terminal board C1426. Omniflex has completely re-designed the Omni16C with new technology to compliment PLC's in applications where alarm annunciation is required using serial communications.

### SPECIFICATIONS

#### Power Supply Options

Voltage Option	24Vdc (STD)	20/30-60Vdc**	85-264Vac**
Isolation PSU to inputs	None	1500Vrms	1500Vrms
** To be ordered as an option see accessories list Fitted prior to shipment C1480/C1481 operating range is 20-60Vdc C1482 operating range is 30-60Vdc.			
Max dc Ripple	10% pk. to pk.	10% pk. to pk.	N/A
Consumption			
C1480	1 Amp max	1.2-0.6 Amps	0.6-0.3A
C1481	1 Amp max	1.2-0.6 Amps	0.6-0.3A
C1482	2 Amps max	2.2 -0.8Amps	1.1-0.5A

#### Alarm Inputs - Potential Free Contact

Input Board Option	C148X-0	C148X-1
Input Type	Common +ve **	Common -ve
	** Standard Option	Order
Quantity and Type	16 Potential Free Contacts	
Max. Open cct Voltage	28Vdc	
Max. Closed cct Current	5mA per input circuit	
Max. Loop Resistance to detect closed contact	200 ohms	

Min. Loop Resistance to detect open contact	100 kohms
---	-----------

#### Alarm Inputs - Individually Isolated

Input Board Option	C148X-2	C148X-3
Input Voltage range	19 to 60Vdc	90-150Vdc/ac rms
Isolation Input to Logic	1500V ac rms	1500V ac rms
Isolation Input to Input	500V ac rms	500V ac rms
Quantity and Type	16 dc or ac inputs	
Compliance to standards		
Safety	IEC950	
EMC	EN50081-2; EN50082-2	
Compliance to CEGB EES 1988 and Eskom NWS1819 specifications		

#### Inputs General

Input Scan Rate	4 milliseconds
Wire size	1.5mm <sup>2</sup> (17SWG/15.5SWG) max.
Connections	Via plug-in Terminals

#### Integral Pushbuttons

Quantity	Four buttons mounted on front facia
Functions	Silence; Acknowledge; Reset; Circuit Test



### Alarm Window Display

Quantity	16 Alarm windows		
Model	C1480B	C1481B	C1482B
Type	Backlit LED	Side bar LED	Incandescent Lamp
Window Size	24mmx64mm	21mmx51mm	24mmx64mm
Legend Area	21mmx60mm	20mmx40mm	21mmx60mm
Legend Type	User printed on film with laser/inkjet using software provided.	Engraved plastic window	User printed on film with laser/inkjet using software provided.

### Relay Contact Outputs

Contact Type	2 Potential free changeover (Form C) 2 Potential free normally Open (Form A)
Contact Rating	2A 30Vdc or 0.5A 230Vac
Isolation	1000Vac from contact to other circuits

### Temperature Range

Operating Temperature	0°C – 60 °C (+32°F – 140°F)
Storage Temperature	-10°C – 70 °C (+14°F – 158°F)

### Weight

Unpacked	1.8kg approx.
Packed	2.2kg approx.

### Compliance to Standards

Safety	EN 60950:1995
Emissions	EN55011 & EN50081-2:1994 Grp I Class A
Immunity – ESD	IEC 61000-4-2:1995, level 3
Immunity – RF Fields	IEC 61000-4-3:1995, level 3

## ORDERING INFORMATION

ORDER CODE	DESCRIPTION
C1480B-x	LED Backlit Alarm Annunciator; 24Vdc ( Order LED boards separately)
C1481B-x	Sidebar LED Annunciator; 24Vdc
C1482B-x	Incandescent Lamp Annunciator; 24Vdc
x =	Omit (default)    -1    -2    -3
	+ve Com    -ve Com    19-60Vdc iso    90-150Vac/dc iso

**Accessories** *To be ordered separately Will be fitted before delivery.*

### Input Board Option

C1174A	Omni16C Ribbon Header Input Board
--------	-----------------------------------

### PSU Option – fitted into the Omni16C Housing.

C1421	85-264Vac/dc Isolated Power Supply
C1422	20/30-60Vdc Isolated Power Supply

### Serial Communications Option (Modbus)

C1423	Isolated RS232/485 Serial Port
-------	--------------------------------

### Repeat Outputs

C1425	8 way Input Repeat Relay Board
C1426	16 way Ribbon-Header Repeat Output Board (Input and Lamp Repeats)
C1169	16 Way Repeat Lamp Driver Terminals

### Pushbutton Stations

C1420	Integral Pushbutton Station – (in window 16)
C1415	Remote Pushbutton Station with Audible

### Window and Lamp Board Options

Backlit LED	
C1150	Red Backlit LED Lamp Board
C1151	Yellow Backlit LED Lamp Board
C1152	Green Backlit LED Lamp Board

Immunity – Fast Transients	IEC 61000-4-4:1995 2 kV – DC power port 1 kV – input/output lines
Supply Variations	IEC 61000-4-7:1991, 24 V dc +15% -10%
Vibration	IEC60068-2-6: 1995 10-150Hz. 1g

### Sequence Options

Seq. No.	Sequence Description
1	LAMP FOLLOWS INPUT
2	MOMENTARY (FLEETING) ALARM, MANUAL RESET
3	ALARM ONLY (NON-LATCHING INPUTS) AUTO RESET
4	MOMENTARY ALARM, MANUAL RESET WITH ALARM RINGBACK
5	FIRST OUT, MULTIPLE GROUPS, MANUAL RESET
6	FIRST OUT, MANUAL RESET, AUTO RESET ON SUBSEQUENT ALARMS
7	FIRST OUT, SINGLE GROUP, MANUAL RESET, FIRST OUT CONTINUOUS FLASH
8	FIRST OUT, MANUAL RESET, SUBSEQUENT ALARMS WITHOUT HORN
9	MOMENTARY ALARM, MANUAL RESET, AUTO SILENCE AFTER TIME DELAY.
10	MOMENTARY ALARM, MANUAL RESET, REALARM AFTER TIME IF STILL ABNORMAL.
11	MOMENTARY ALARM, MANUAL RESET, CONSTANT FLASH (FOR MOTOR ALARMS).
12	MOMENTARY ALARM, AUTO RESET, TIME DELAY ON RETURN TO NORMAL.
13	PULSE MONITORING ALARM; MANUAL RESET
18	MOMENTARY ALARM, AUTO RESET
21	FIRST OUT, MULTIPLE GROUPS, AUTO RESET
23	FIRST OUT, SINGLE GROUP, AUTO RESET, FIRST OUT CONTINUOUS FLASH
24	FIRST OUT, AUTO RESET, SUBSEQUENT ALARMS WITHOUT HORN
25	MOMENTARY ALARM, AUTO RESET, AUTO SILENCE AFTER TIME DELAY.
26	MOMENTARY ALARM, AUTO RESET, REALARM AFTER TIME IF STILL ABNORMAL.
27	MOMENTARY ALARM, AUTO RESET, CONSTANT FLASH (FOR MOTOR ALARMS)
28	PULSE MONITORING ALARM, AUTO RESET
30	SERIAL PORT READ ONLY MODE
31	SERIAL PORT READ/WRITE MODE

C1153	Blue Backlit LED Lamp Board
C1154	Orange Backlit LED Lamp Board
C1155	White Backlit LED Lamp Board

### Incandescent

C1160	Lamp and Holder 8 Window Pack
C1161	Incand. Lamp replacement 10 pack
C1162	Incand. Lamp replacements 100 pack
C1163	Assorted Colour Filter Kit
C1164A	Plastic Windows and Diffuser Kit (8 pack)

### Sidebar LED

C1448-1	Black engravable window
C1448-2	Red engravable window
C1448-3	Amber engravable window
C1448-4	Yellow engravable window
C1448-5	Green engravable window
C1448-6	Blue engravable window
C1448-7	White engravable window
C1446	Engraving for Sidebar Led Windows

### Mounting Hardware


C1431-01	Mounting Kit 2 High Stack
C1431-02	Mounting Kit 3 High Stack
C1431-03	Mounting Kit 4 High Stack

### Interface Accessories


C1168	Omniset Programming cable for Prog Port
C6320A-2	Ribbon Header to terminals converter
C6308A-2-0	Ribbon to 16 Relays Form C 5A



### ELECTRICAL CONNECTION

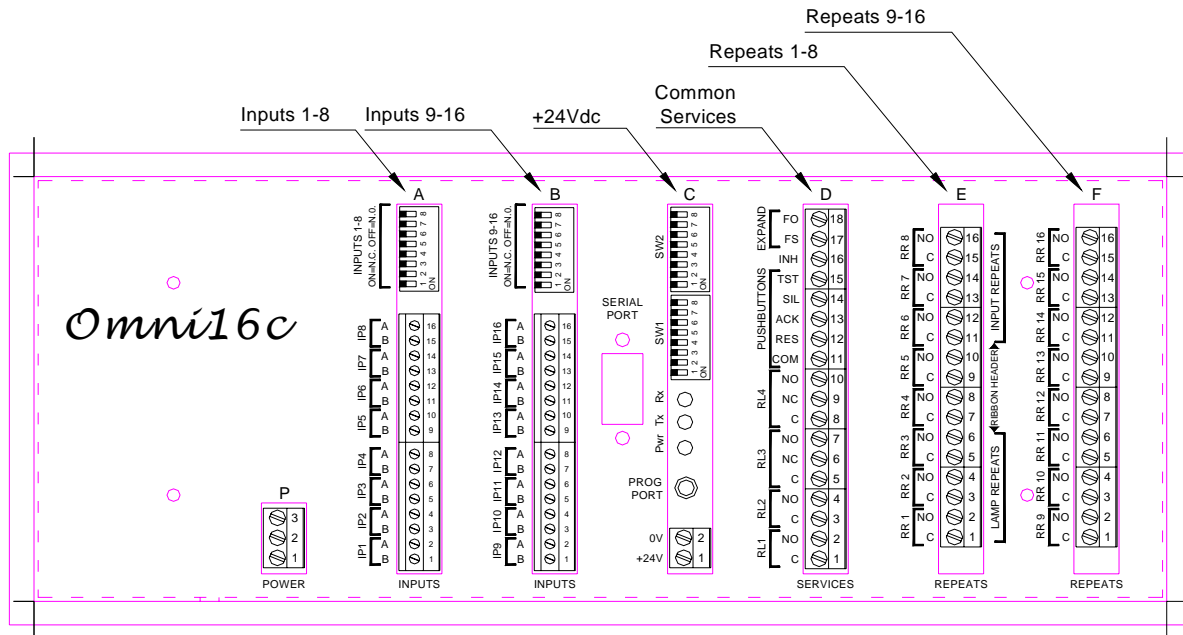

### MECHANICAL CONFIGURATION

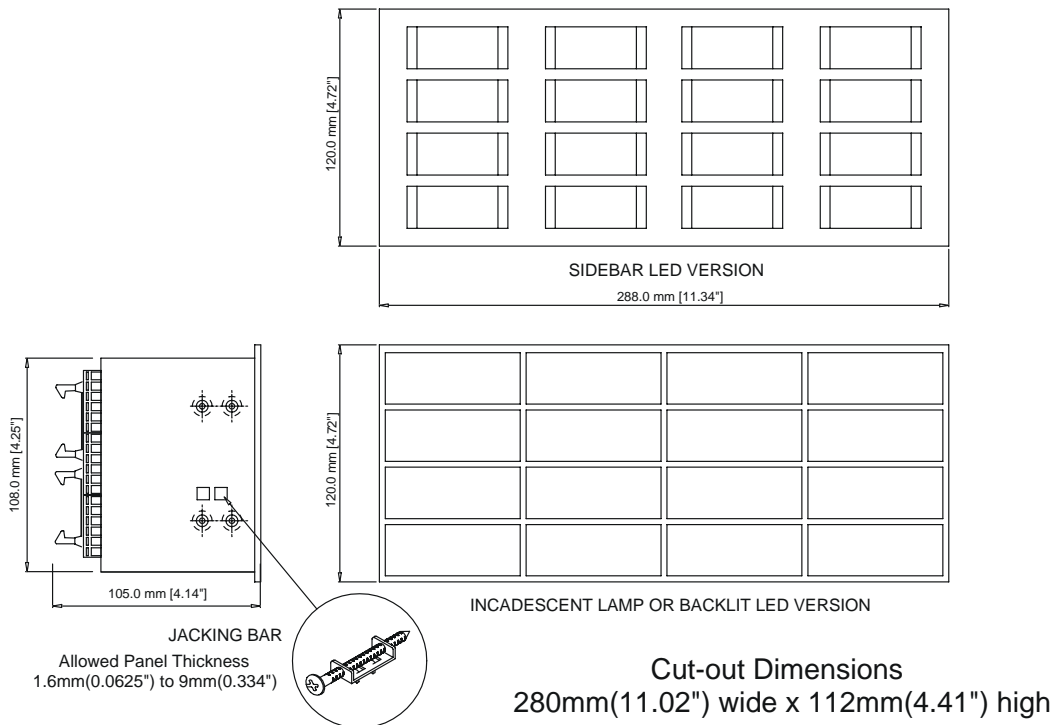



### ELECTRICAL CONNECTION DIAGRAM

