

Agilent Technologies 8114A 100 V/2 A Programmable Pulse Generator

Technical Specifications



Faster Characterization and Test, without Compromise

Key Features:

- 100 Vpp (2 A) into open (or from 1K Ω into 50 Ω),
- 7ns Transitions (fixed),
- 15 MHz Repetition Rate,
- Variable Pulse-Width,
- Variable Pulse Baseline ± 25 V (optional),
- 3 Digit Resolution,
- SCPI Programming Commands,
- External Triggering and Gating,
- Counted Burst Mode,
- Graphic Display.

Agilent Technologies 8114A 100 V/ 2 A Programmable Pulse Generator

The Agilent 8114A 100 V/ 2 A pulse generator helps you maximize test efficiency as the key to reducing time to market without compromising the quality of your product. It shortens characterization and test time by providing:

- clean, reliable and repeatable pulse waveforms,
- easy set-up and operation,
- full programmability,
- protection of the device under test.

On the bench ...

To save time on the bench the 8114A offers you fast set-up and operation, confidence in your results and the ability to automate your tests to improve test coverage in the time available. You get:

- all pulse parameters at a glance,
- fast store and recall of hundreds of settings on memory card,
- accurate, repeatable pulses,
- SCPI programming commands.

To protect your device under test, the Agilent 8114A provides:

- adjustable level and duty cycle limits,
- clean, reliable pulses,
- inhibit input that allows DUT feedback signal to inhibit pulse output.

In a Test System ...

To achieve high test throughput, and efficient integration of diverse test instruments and effective generation of test programs, the Agilent 8114A integrates smoothly into automated test systems by ensuring:

- reduced programming investment through SCPI programming commands,
- easy physical integration into a rack with optional rear panel connectors,
- reliable, repeatable pulses across a wide temperature range.



Agilent Technologies

Clean, Reliable Pulses

The Agilent 8114A generates clean pulses with low jitter and excellent pulse performance at all specified settings in any triggering mode and, of course, across the entire operating temperature range. Parameters and trigger modes can be changed without generating unwanted pulses, so that reliable measurements are guaranteed

External Synchronization

As well as generating continuous streams of pulses, the Agilent 8114A can be triggered or gated by an external signal or the MANual trigger key. Combined with the ability to generate double-pulses per period and counted bursts you can generate a variety of pulse patterns synchronized to an external signal.

Accuracy and Repeatability

The excellent accuracy, repeatability and resolution of the Agilent 8114A let you concentrate on your results, not the measurement. Confidence in your results is assured when you can trust your test set-up and the Agilent 8114A maintains its pulse performance at all specified pulse amplitudes.

Voltage or Current

With the Agilent 8114A you can set the pulse levels in terms of voltage or current, to suit the device you are testing.

Load Compensation

You can quickly set the pulse levels for your device, even when it's not a true 50 Ω load. Set the expected load impedance at the output and the Agilent 8114A adjusts its signal accordingly to achieve the required levels as shown on the display or programmed via GPIB.

Device Protection

To reduce the risk of accidental damage to the device under test the Agilent 8114A has adjustable voltage, current and duty cycle limits. As long as the limits are enabled you cannot set or program the output signal outside your chosen limits.

The Agilent 8114A inhibit input accepts a TTL feedback signal from your test system or device under test to inhibit the pulse signal under hardware control.

Reduced Programming

All parameters of the Agilent 8114A are programmable via GPIB. SCPI (Standard Commands for Programmable Instruments) facilitates the standardization of test programs and offers a common programming syntax with other instruments.

The local user-interface eases the transition from manual to automated test by displaying the SCPI command syntax for each parameter as part of the on-screen help information.

Easy Rack Integration

Optional rear panel connectors and rack mount kits make it easy to install the Agilent 8114A in a rack-based system.

Conformance to the latest European EMC standards minimizes radiated and conducted electromagnetic interference with the test system.

Reliable measurements are guaranteed over the whole temperature range that exists in a test rack.

Specifications

Specifications describe the instrument's warranted performance. Non-warranted values are described as typical. All specifications apply after a 30-minute warm-up phase with 50 Ω source/ load resistance. All specifications are valid from 0°C to 55°C ambient temperature.

8114A Specifications

Timing Characteristics

Measured at 50% amplitude at fastest transitions in continuous mode and 50 Ω source impedance.

Frequency range	1 Hz to 15.00 MHz
Timing resolution (period, width)	3 digits, 100 ps best case
RMS jitter (period, width, delay)	0.03% ± 25 ps (± 0.05% ± 25 ps for period < 100ns)
Period range	66.7 ns to 999 ms
Accuracy	± 5% ± 100 ps
Width range	10.0 ns to 150 ms (max: period - 10.0 ns)
Accuracy	± 5% ± 500 ps
Fixed delay	42ns typical ^[1]
Additional variable delay range	0.00 ns to 999 ms(max: period - 4 ns)
Accuracy	± 5% ± 1 ns
Resolution	3 digits, 10 ps best case
Transition time (10/90)	50 Ω into 50 Ω: < 7 ns (amplitude > 5 V) High-Z into 50 Ω: < 12ns (amplitude > 10 V)

Note: [1] Measured between Trigger Output and Output

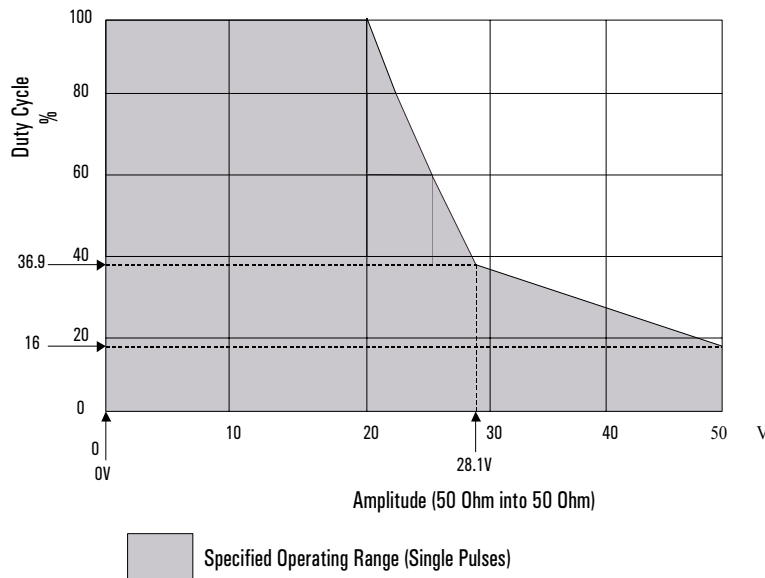


Figure 1

Width: Can be set as width, duty cycle, or trailing edge delay.

Burst Count: 2 to 65536 (single or double pulses).

Double Pulse: Two pulses are generated per pulse period. The first pulse starts at the start of the period, the double-delay sets the delay to the start of the second pulse. Double pulses are available in all trigger modes except External Width.

Delay: Delay, phase or % of period. Double pulse delay: Double pulse and delay are mutually exclusive. The delay between double pulses can be set as delay or % of period (minimum period 134 ns)

Duty cycle: Set between 0.1% and 100% (subject to width limits and period specifications).

Figure 1 shows the specified operating range for actual duty cycle and amplitude. Note that in double pulse mode the actual duty cycle is twice the displayed value.

Repeatability: Is typically four times better than accuracy.

Level/Pulse Performance Characteristics

		Agilent 8114A
Amplitude		1.00 V to 50.0V or 20.0 mA to 1.00A (values approximately double for source or load resistance > 1 k Ω).
	Accuracy	$\pm 1\%$ of amplitude ± 100 mV
	Resolution	3 digits, best case 10 mV
Baseline	Standard Instrument Option 001	< 100 mV + 0.5% of amplitude. -25.0 V to 25.0V ^[1]
	Accuracy	$\pm 1\% \pm 100$ mV $\pm 0.5\%$ of amplitude.
	Pulse Window	± 50 V
Base line noise		10 mV RMS typ.
Output connectors		BNC
Source Impedance		Selectable 50 Ω or High Impedance (> 1 k Ω)
Short circuit current		2 A
Overshoot/preshoot/ringing		< $\pm 5\%$ of amplitude ± 100 mV
Settling time		< 100 ns typical

Note: [1] 50 Ω source must be selected for variable baseline

Level parameters: Can be entered as voltage or current, as high and low level, or as offset and amplitude.

Load compensation: The actual load value can be entered (for loads differnt to 50 Ω) to display actual output values.

On/ off: Relays connect/disconnect output.

Polarity: Positive or negative pulses selectable.

Output Protection: Maximum external voltage 100 Vpp from 50 Ω source (± 10 Vdc from 0 Ω source).

Limit: Programmable level and duty cycle limits restrict the available output ranges to protect the device-under-test.

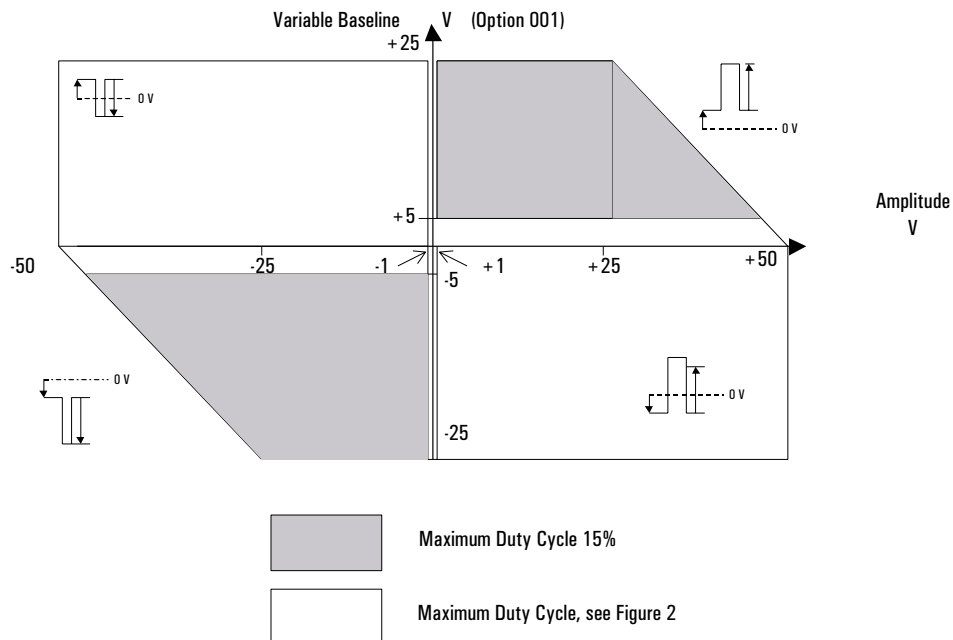


Figure 2

Trigger Modes

Continuous: Continuous pulses, double pulses or bursts (single or double pulses).

External triggered: Each active input transition (rising, falling or both) generates a single or double pulse or burst.

External gated: The active input level (high or low) enables pulses, double pulses or bursts. The last single/ double pulse or burst is always completed.

External width: The pulse shape can be recovered, whilst period and width of an external input signal are maintained. Levels and transitions can be set.

Manual: Simulates an external input signal.

External input

Used for trigger, gate or external width.

Input impedance: 10 kΩ

Threshold: -10 V to +10 V with 100 mV resolution.

Max. input voltage: ±50 V.

Sensitivity: ±300 mVpp typical.

Input transitions: <100 ns.

Frequency: dc to 15 MHz.

Minimum pulsewidth: 10 ns typical.

Trigger Output

Level: fixed TTL (2.5 V into 50 Ω).

Output impedance: 50 Ω typical.

Trigger format: One pulse per period with 50% duty cycle typical.

Max. external voltage: -2 V/+7 V.

Transition times: 5 ns typical.

Delay from external input to trigger output: 24 ns typical.

Inhibit Input

An external TTL signal at the inhibit input can be used to inhibit the pulse signal, holding the output signal at its baseline level.

Inhibit on Edge: An active edge inhibits the pulse signal until reset from the front panel or GPIB

Inhibit on Level: An active level inhibits the pulse signal.

Input impedance: 100 kΩ

Threshold: 1.5 V (TTL) typical.

Max. input voltage: ±50 V.

Input transitions: <100 ns.

Frequency: dc to 5 MHz.

Minimum pulsewidth: 100 ns typical

Inhibit response time: 200 ns typical.

Remote Control

Operates according to IEEE standard 488.2, 1987 and SCPI 1992.0.

Function Code: SH1, AH1, T6, L4, SR1, RL1, PP0, DC1, DT1, C0.

Programming times: (all checks and display off).

ASCII command	Typ. exec. time
One parameter or mode	5 ... 20 ms typ.
Recall setting	250 ms typ.

User Interface

Overprogramming: all parameters can be overprogrammed (exceeding specifications) to fully exploit the hardware limits.

Display: All pulse parameters at a glance on one display.

Help key: displays a context-sensitive message.

Non-volatile memory: current setting is saved on power-down.

Clear memory: clears all stored user settings.

Memory card: Instrument settings (350 bytes) can be stored on MS-DOS formatted PCMCIA card. Cards can also be used for convenient firmware upgrades.

General

Operating temperature:

0°C to +55°C.

Storage temperature:

-40°C to +70°C.

Humidity: 95% r.h. up to 40°C ambient temperature.

EM C: EN 55011, Group 1, Class A.

Noise emission: 5.5 bel typical.

Safety: IEC1010 safety class 1

Battery: Lithium CR2477-N.

Power requirements:

100-240 Vac, ± 10%, 50-60 Hz;

100-120 Vac, ± 10%, 400 Hz.

Power consumption:

500 VA max.

Max. dimensions (H * W * D):

133 mm * 426 mm * 422 mm.

Weight: 14 kg net, 17 kg shipping.

Recalibration period:

one year recommended.

Warranty: 1 year.

Ordering Information

Agilent 8114A 100 V / 2 A Programmable Pulse Generator

Option 001: Variable Baseline ± 25 V

Option UFJ: 1 MB Memory Card

Opt UN2: Rear Panel Connectors (instead of front panel)

Opt 1CP: Rack Mount and Handle Kit (5063-9219)

Opt 1CN: Handle Kit (5063-9226)

Opt 1CM: Rack Mount Kit (5063-9212)

Opt 1CR: Rack Slide Kit (1494-0059)

Opt 0BW: Service Manual (08114-91021)

Opt 0B2: Additional English Language User's Guide
(08114-91012)

Related Agilent Literature

- Agilent Family of Pulse/ Pattern Generators, brochure p/ n 5980-0489E

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlay Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test & measurement needs

Online assistance:
[www.agilent.com/ find/ assist](http://www.agilent.com/find/assist)

Phone or Fax

United States:

(tel) 1 800 452 4844

Canada:

(tel) 1 877 894 4414

(fax) (905) 206 4120

Europe:

(tel) (31 20) 547 2000

Japan:

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

Latin America:

(tel) (305) 267 4245

(fax) (305) 267 4286

Australia:

(tel) 1 800 629 485

(fax) (61 3) 9272 0749

New Zealand:

(tel) 0 800 738 378

(fax) 64 4 495 8950

Asia Pacific:

(tel) (852) 3197 7777

(fax) (852) 2506 9284

Product specifications and descriptions in this document subject to change without notice.

Copyright © 2001 Agilent Technologies

Printed in Germany April, 11 2001

5980-1213E

For more information please visit us
[www.agilent.com/ find/ pulse_generator](http://www.agilent.com/find/pulse_generator)



Agilent Technologies