


Thermally-Enhanced High Power RF LDMOS FETs 55 W, 869 – 960 MHz

Description

The PTFA080551E and PTFA080551F are 55-watt LDMOS FETs designed for EDGE and CDMA power amplifier applications in the 869 to 960 MHz band. Features include input matching and thermally-enhanced packages with slotted or earless flanges. Manufactured with Infineon's advanced LDMOS process, these devices provide excellent thermal performance and superior reliability.


PTFA080551E
Package H-36265-2

PTFA080551F
Package H-37265-2



Three-carrier CDMA2000 Performance

$V_{DD} = 28\text{ V}$, $I_{DQ} = 450\text{ mA}$, $f = 960\text{ MHz}$

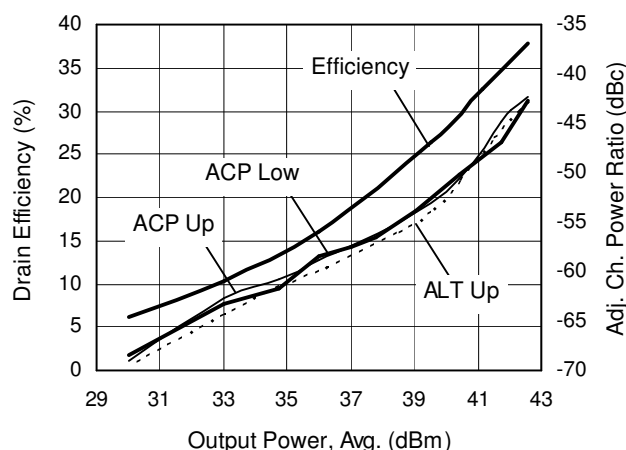

Features

- Broadband internal matching
- Typical EDGE performance
 - Average output power = 26 W
 - Gain = 18 dB
 - Efficiency = 44%
- Typical CW performance
 - Output power at P-1dB = 75 W
 - Gain = 17 dB
 - Efficiency = 67%
- Integrated ESD protection: Human Body Model, Class 2 (minimum)
- Excellent thermal stability, low HCI drift
- Capable of handling 10:1 VSWR @ 28 V, 55 W (CW) output power
- Pb-free and RoHS compliant

RF Characteristics

EDGE Measurements (not subject to production test—verified by design/characterization in Infineon test fixture)

$V_{DD} = 28\text{ V}$, $I_{DQ} = 450\text{ mA}$, $P_{OUT} = 26\text{ W AVG}$, $f = 959.8\text{ MHz}$

Characteristic	Symbol	Min	Typ	Max	Unit
Error Vector Magnitude	EVM (RMS)	—	2.5	—	%
Modulation Spectrum @ 400 kHz	ACPR	—	-60	—	dBc
Modulation Spectrum @ 600 kHz	ACPR	—	-75	—	dBc
Gain	G_{ps}	—	18	—	dB
Drain Efficiency	η_D	—	44	—	%

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

RF Characteristics (cont.)

Two-tone Measurements (tested in Infineon test fixture)

$V_{DD} = 28\text{ V}$, $I_{DQ} = 600\text{ mA}$, $P_{OUT} = 55\text{ W PEP}$, $f = 960\text{ MHz}$, tone spacing = 1 MHz

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	18	18.5	—	dB
Drain Efficiency	η_D	46.5	48	—	%
Intermodulation Distortion	IMD	—	−31	−29	dBc

DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$, $I_{DS} = 10\text{ }\mu\text{A}$	$V_{(BR)DSS}$	65	—	—	V
Drain Leakage Current	$V_{DS} = 28\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	1.0	μA
	$V_{DS} = 63\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	10.0	μA
On-State Resistance	$V_{GS} = 10\text{ V}$, $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.15	—	Ω
Operating Gate Voltage	$V_{DS} = 28\text{ V}$, $I_{DQ} = 450\text{ mA}$	V_{GS}	2.0	2.3	3.0	V
Gate Leakage Current	$V_{GS} = 10\text{ V}$, $V_{DS} = 0\text{ V}$	I_{GSS}	—	—	1.0	μA

Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	65	V
Gate-Source Voltage	V_{GS}	−0.5 to +12	V
Junction Temperature	T_J	200	$^{\circ}\text{C}$
Total Device Dissipation	P_D	219	W
Above 25 $^{\circ}\text{C}$ derate by		1.25	W/ $^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	−40 to +150	$^{\circ}\text{C}$
Thermal Resistance ($T_{CASE} = 70^{\circ}\text{C}$)	$R_{\theta JC}$	0.8	$^{\circ}\text{C/W}$


Ordering Information

Type and Version	Package Outline	Package Description	Shipping	Marking
PTFA080551E V4	H-36265-2	Thermally-enhanced, slotted flange, single-ended	Tray	PTFA080551E
PTFA080551F V4	H-37265-2	Thermally-enhanced, earless flange, single-ended	Tray	PTFA080551F

Typical Performance (data taken in a production test fixture)


Edge EVM and Modulation Spectrum vs. Quiescent Current

$V_{DD} = 28\text{ V}$, $f = 959.8\text{ MHz}$, $P_{OUT} = 22\text{ W}$

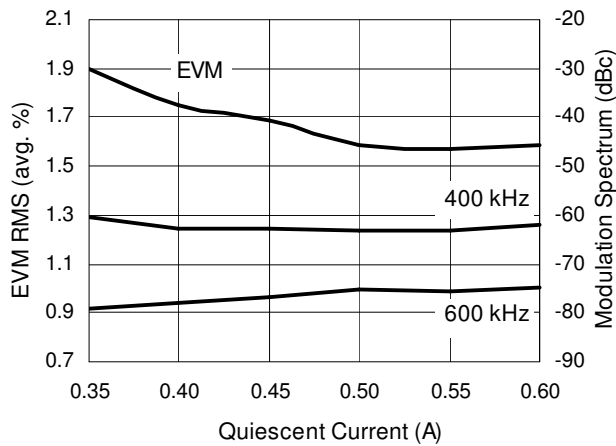


EDGE Modulation Spectrum Performance

$V_{DD} = 28\text{ V}$, $I_{DQ} = 450\text{ mA}$, $f = 959.8\text{ MHz}$

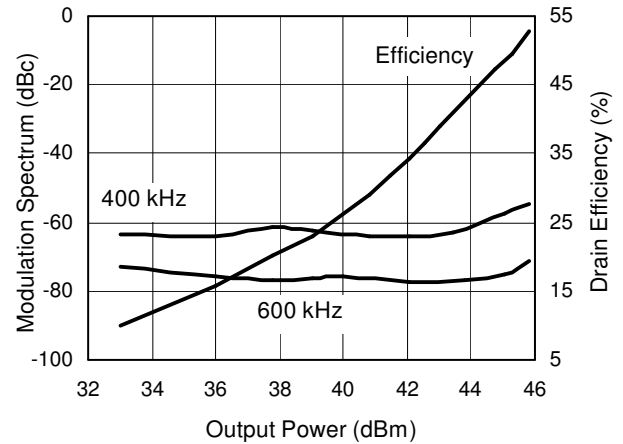

EDGE EVM Performance


$V_{DD} = 28\text{ V}$, $I_{DQ} = 450\text{ mA}$, $f = 959.8\text{ MHz}$

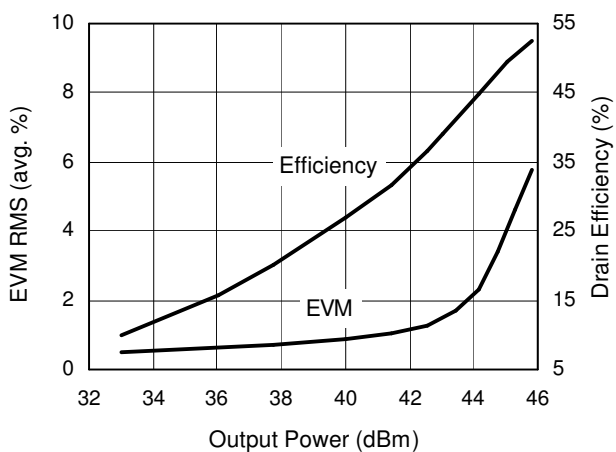

Intermodulation Distortion vs. Output Power

(as measured in a broadband circuit)


$V_{DD} = 28\text{ V}$, $I_{DQ} = 450\text{ mA}$, $f_1 = 959\text{ MHz}$, $f_2 = 960\text{ MHz}$

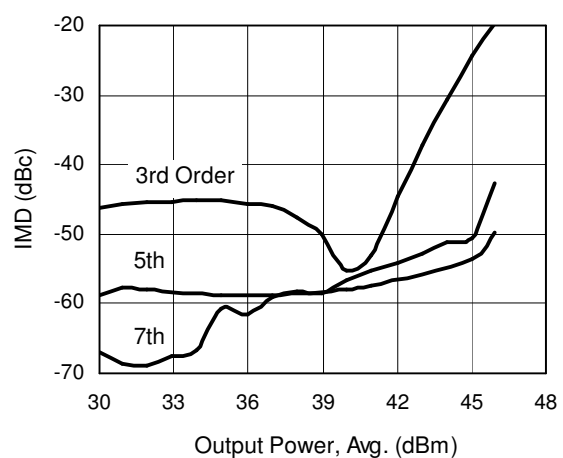

Typical Performance (cont.)


IM3 vs. Output Power at Selected Biases

$V_{DD} = 28\text{ V}$, $f_1 = 959$, $f_2 = 960\text{ MHz}$

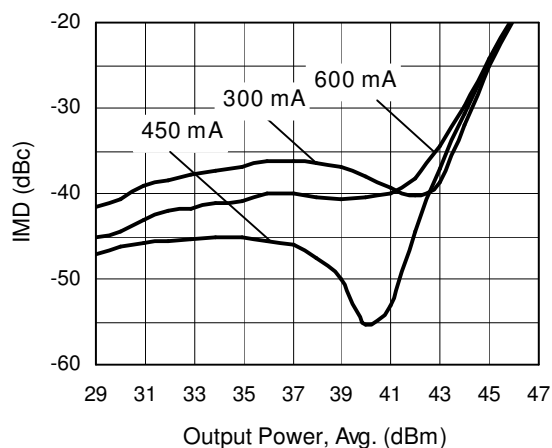


Linear Broadband Performance

$V_{DD} = 28\text{ V}$, $I_{DQ} = 600\text{ mA}$, $P_{OUT\text{ Avg}} = 44.39\text{ dBm}$

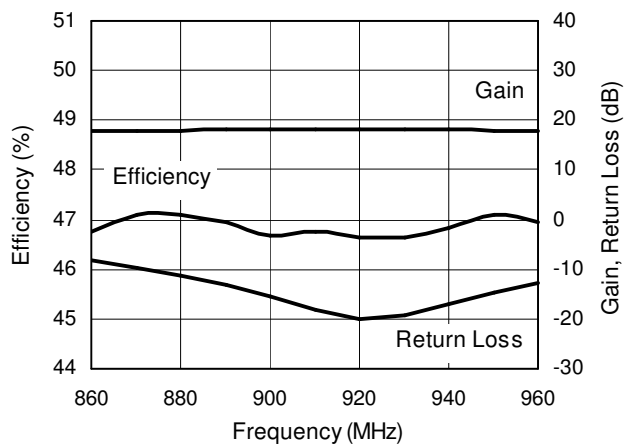


Power Sweep

$V_{DD} = 28\text{ V}$, $f = 960\text{ MHz}$

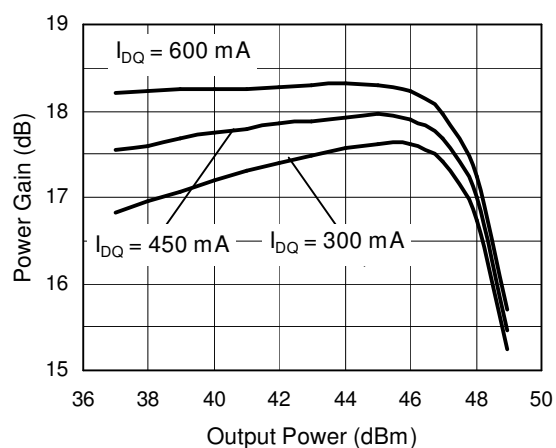

Gain & Efficiency vs. Output Power


$V_{DD} = 28\text{ V}$, $I_{DQ} = 600\text{ mA}$, $f = 960\text{ MHz}$

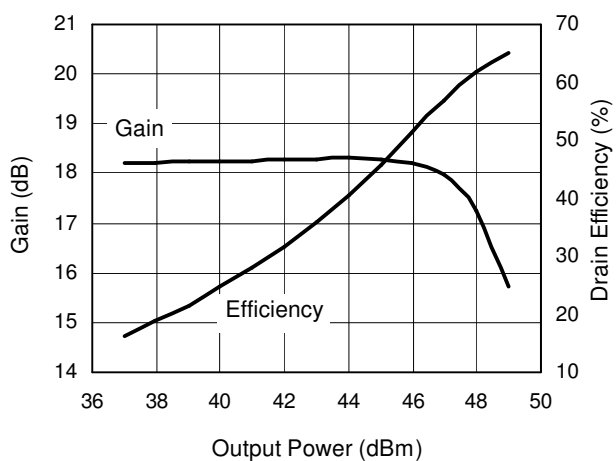

Typical Performance (cont.)


Output Power (P-1dB) vs. Drain Voltage

$I_{DQ} = 600 \text{ mA}$, $f = 960 \text{ MHz}$

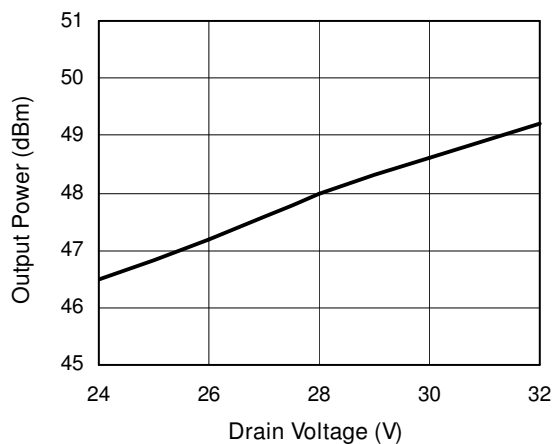


IS-95 CDMA Performance

$V_{DD} = 28 \text{ V}$, $I_{DQ} = 450 \text{ mA}$, $f = 960 \text{ MHz}$

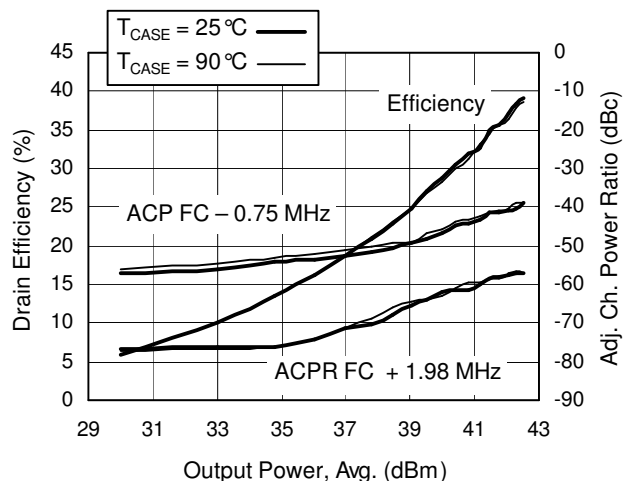


Bias Voltage vs. Temperature

Voltage normalized to typical gate voltage,
series show current

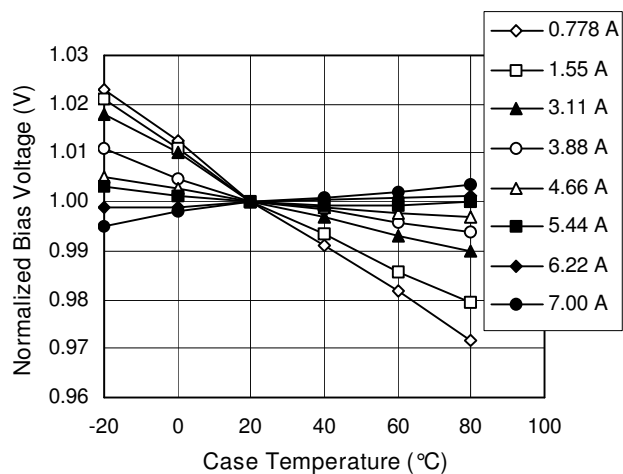


Broadband Circuit Impedance

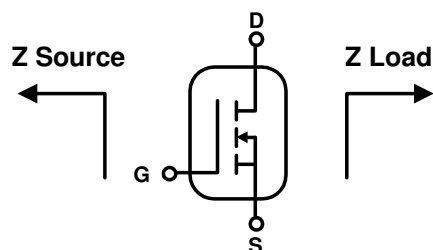

Frequency	Z Source Ω		Z Load Ω	
MHz	R	jX	R	jX
869	8.91	-10.93	7.42	-1.63
880	3.72	-8.28	4.65	-1.74
894	5.93	-5.43	4.61	0.16
920	4.87	-7.16	4.88	-0.59
960	6.05	-5.57	4.89	0.86

See next page for circuit information

Reference Circuit

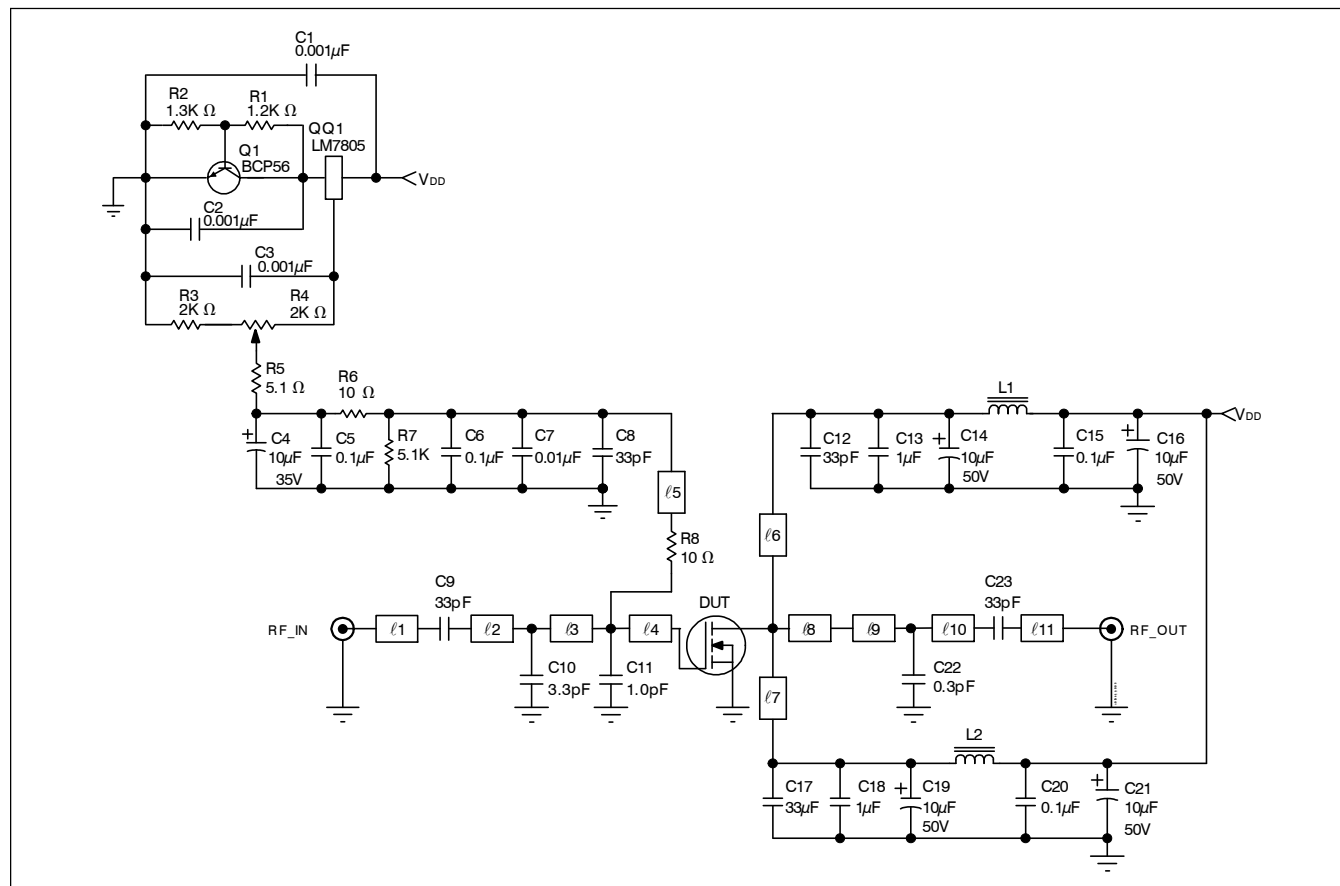

Reference circuit schematic diagram for $f = 960 \text{ MHz}$


Circuit Assembly Information

DUT	PTFA080551E or PTFA080551F	LDMOS Transistor	
PCB	0.76 mm [.030"] thick, $\epsilon_r = 4.5$	Rogers TMM4	2 oz. copper

Microstrip	Electrical Characteristics at 960 MHz ¹	Dimensions: L x W (mm)	Dimensions: L x W (in.)
ℓ_1	0.070 λ , 50.0 Ω	12.19 x 1.37	0.480 x 0.054
ℓ_2	0.122 λ , 50.0 Ω	20.93 x 1.37	0.824 x 0.054
ℓ_3	0.031 λ , 50.0 Ω	5.31 x 1.37	0.209 x 0.054
ℓ_4	0.063 λ , 7.5 Ω	9.58 x 16.21	0.377 x 0.638
ℓ_5	0.162 λ , 67.0 Ω	28.45 x 0.79	1.120 x 0.031
ℓ_6, ℓ_7	0.150 λ , 55.0 Ω	25.65 x 1.17	1.010 x 0.046
ℓ_8	0.198 λ , 11.1 Ω	30.73 x 10.46	1.210 x 0.412
ℓ_9	0.145 λ , 38.0 Ω	24.21 x 2.16	0.953 x 0.085
ℓ_{10}	0.009 λ , 38.0 Ω	1.52 x 2.16	0.060 x 0.085
ℓ_{11}	0.026 λ , 50.0 Ω	4.50 x 1.37	0.177 x 0.054

¹Electrical characteristics are rounded.

Reference Circuit (cont.)

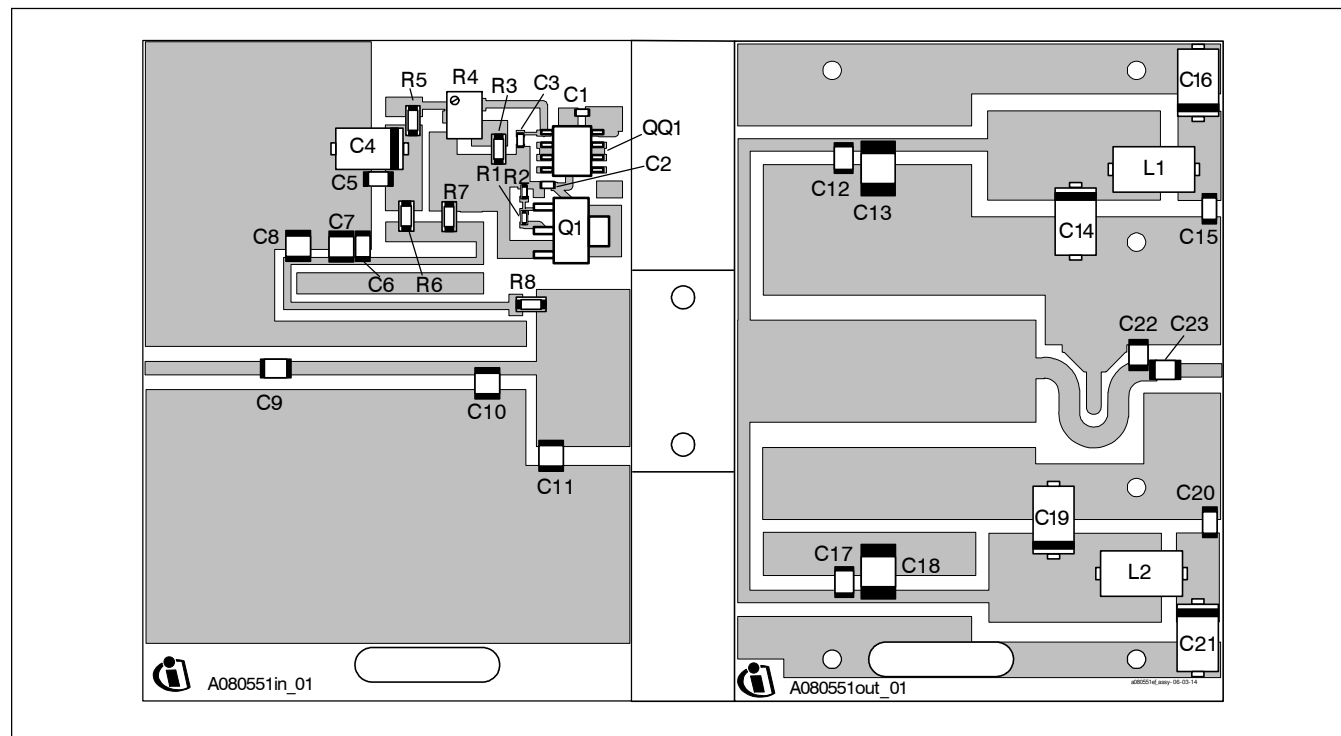

Reference circuit assembly diagram (not to scale)*

Component	Description	Suggested Manufacturer	P/N or Comment
C1, C2, C3	Capacitor, 0.001 μ F	Digi-Key	PCC1772CT-ND
C4	Tantalum capacitor, 10 μ F, 35 V	Digi-Key	399-1655-2-ND
C5, C6, C15, C20	Capacitor, 0.1 μ F	Digi-Key	PCC104BCT-ND
C8, C9, C12, C17, C23	Ceramic capacitor, 33 pF	ATC	100B 330
C7	Capacitor, 0.01 μ F	ATC	200B 103
C10	Ceramic capacitor, 3.3 pF	ATC	100B 3R3
C11	Ceramic capacitor, 1.0 pF	ATC	100B 1R0
C13, C18	Capacitor, 1.0 μ F	ATC	920C105
C14, C16, C19, C21	Tantalum capacitor, 10 μ F, 50 V	Garrett Electronics	TPSE106K050R0400
C22	Ceramic capacitor, 0.3 pF	ATC	100B 0R3
L1, L2	Ferrite, 8.9 mm	Elna Magnetics	BDS 4.6/3/8.9-4S2
Q1	Transistor	Infineon Technologies	BCP56
QQ1	Voltage regulator	National Semiconductor	LM7805
R1	Chip Resistor 1.2 k-ohms	Digi-Key	P1.2KGCT-ND
R2	Chip Resistor 1.3 k-ohms	Digi-Key	P1.3KGCT-ND
R3	Chip Resistor 2 k-ohms	Digi-Key	P2KECT-ND
R4	Potentiometer 2 k-ohms	Digi-Key	3224W-202ETR-ND
R5, R7	Chip Resistor 5.1 k-ohms	Digi-Key	P5.1KECT-ND
R6, R8	Chip Resistor 10 ohms	Digi-Key	P10ECT-ND

*Gerber Files for this circuit available on request

Package Outline Specifications

Package H-36265-2


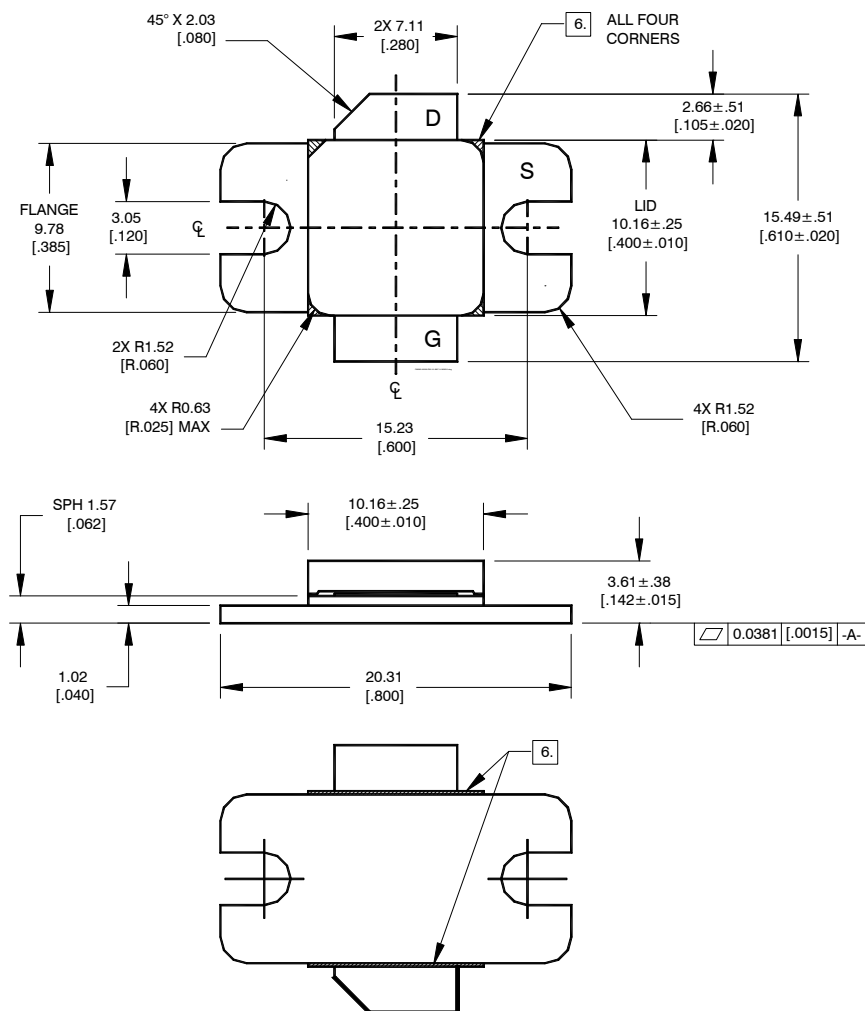


Diagram Notes—unless otherwise specified:

1. Interpret dimensions and tolerances per ASME Y14.5M-1994.
2. Primary dimensions are mm. Alternate dimensions are inches.
3. Pins: D = drain, S = source, G = gate.
4. Lead thickness: 0.10 +0.051/-0.025 [.004 +.002/-0.001].
5. Gold plating thickness:
S, D, G - flange & leads: 1.14 ± 0.38 micron [45 ± 15 microinch]
6. Exposed metal plane on top and bottom of ceramic insulator.
7. All tolerances ± 0.1 [.025] / ± 0.127 [.005] unless specified otherwise.

Package Outline Specifications (cont.)

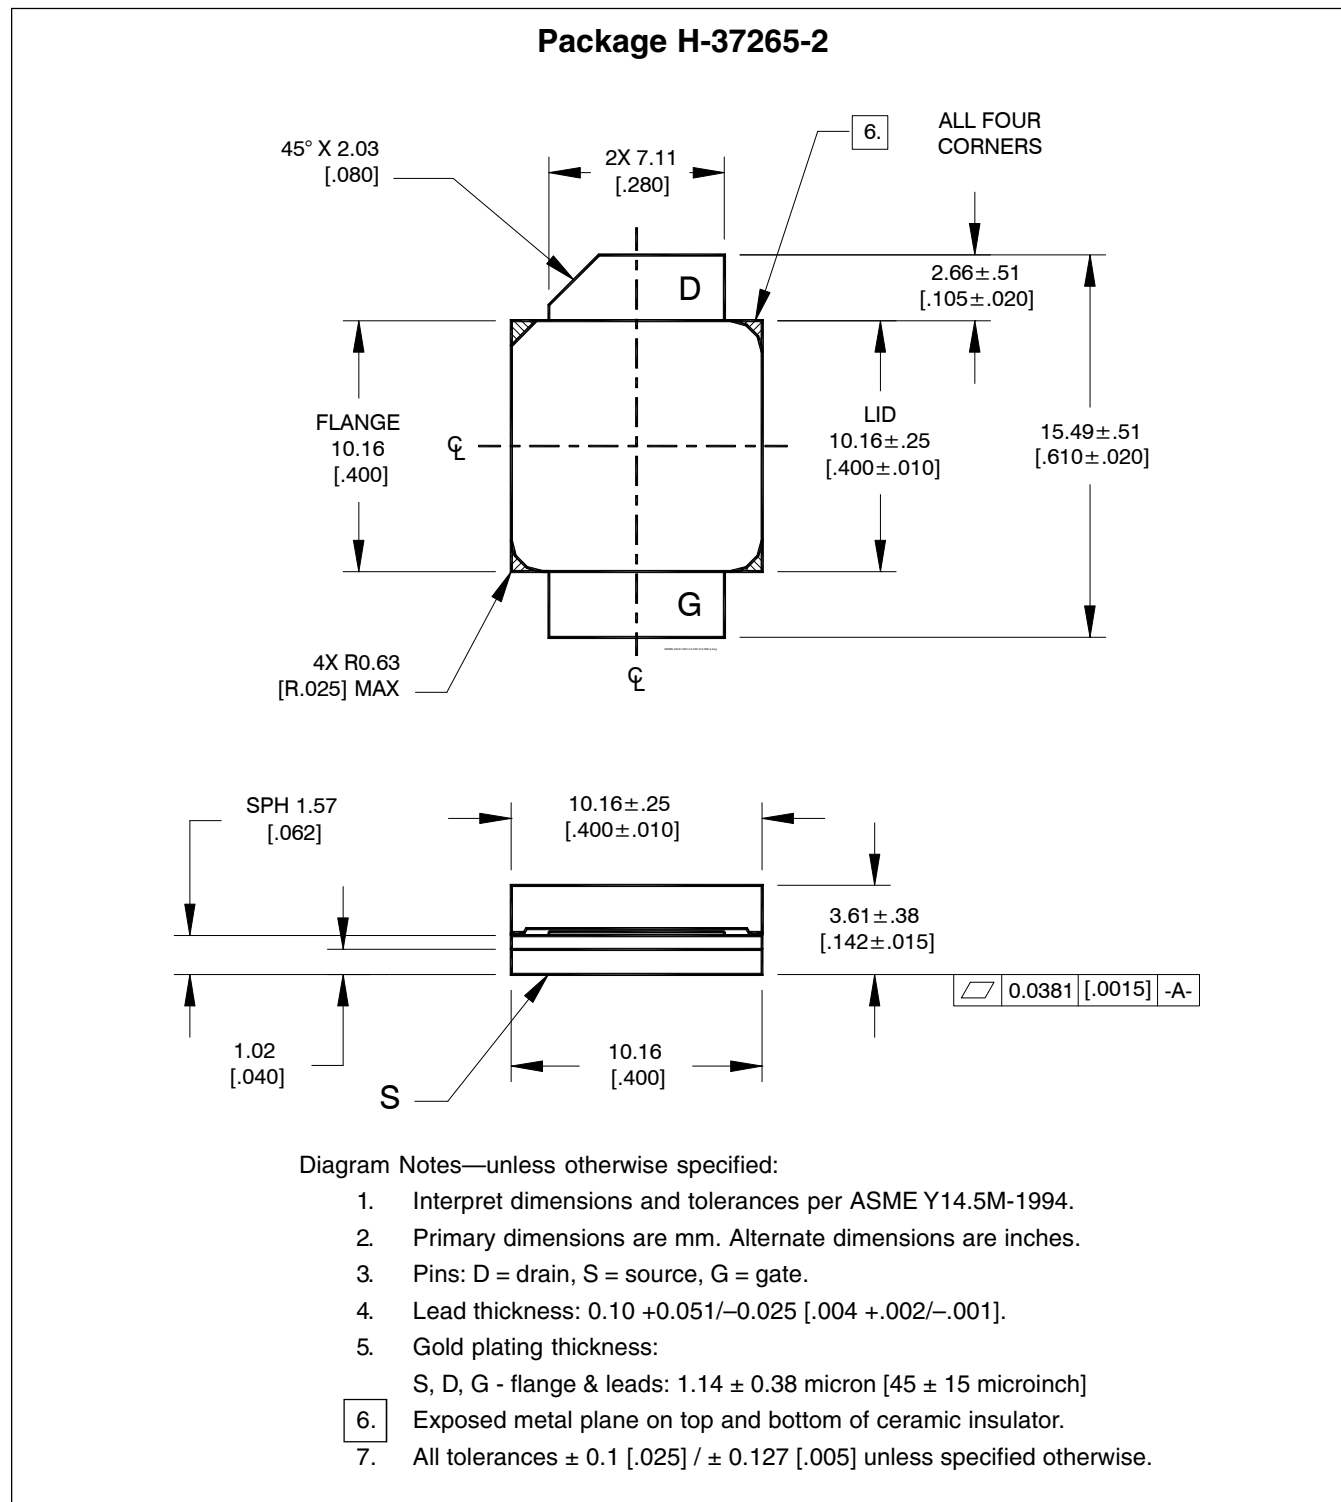

Find the latest and most complete information about products and packaging at the Infineon Internet page
<http://www.infineon.com/rfpower>

Revision History: 2008-10-22

Data Sheet

Previous Version: 2008-10-14, Data Sheet

Page	Subjects (major changes since last revision)
5	Remeasure Voltage vs. Temperature
9, 10	Update package outline diagrams and information
11	Update company information.

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?

Your feedback will help us to continuously improve the quality of this document.


Please send your proposal (including a reference to this document) to:

highpowerRF@infineon.com

To request other information, contact us at:

+1 877 465 3667 (1-877-GO-LDMOS) USA

or +1 408 776 0600 International

**Edition 2008-10-22****Published by****Infineon Technologies AG****81726 Munich, Germany****© 2008 Infineon Technologies AG****All Rights Reserved.****Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com/rfpower).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.