

This literature was published years prior to the establishment of Agilent Technologies as a company independent from Hewlett-Packard and describes products or services now available through Agilent. It may also refer to products/services no longer supported by Agilent. We regret any inconvenience caused by obsolete information. For the latest information on Agilent's test and measurement products go to:

www.agilent.com/find/products

Or in the U.S., call Agilent Technologies at 1-800-452-4844 (8am-8pm EST)



Agilent Technologies

Innovating the HP Way




MM-Wave Waveguide Terminations Fixed Loads 33.0-60.0 GHz

HP Models
Q910A
U910A

TECHNICAL DATA • MAY 1985

NEW PERFORMANCE STANDARDS FOR MM-WAVE MEASUREMENTS

HP's Q910A and U910A fixed loads cover a frequency range of 33.0 to 50.0 and 40.0 to 60.0 GHz respectively. They have been designed to have a maximum SWR of <1.04 , which make them ideal for the precise measurements of small reflections in transmission lines.

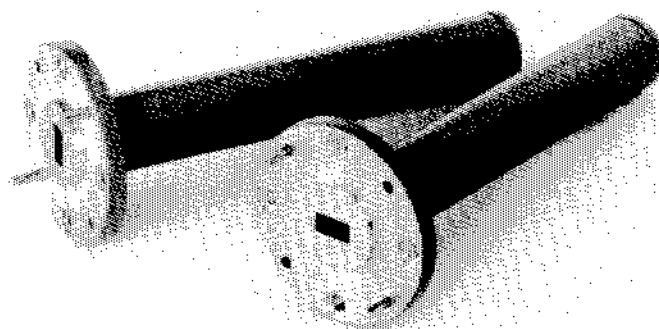

SPECIFICATIONS

HP Model #	Q910A	U910A
Frequency Range (GHz)	33.0 - 50.0	40.0 - 60.0
Fits Waveguide Size:		
EIA	WR-22	WR-19
MIL-W-85/x-xxx	3-010	3-014
Equivalent Flange:		
MIL-F-3922/xx-xxx	67B-006	67B-007
UG-xxx/U	UG-383/U	UG-383/U (mod.)
Max. SWR Load	1.03	1.04
Max. Input Power:	1.0 W Avg.	1.0 W Avg.
Dimensions:		
Length:	cm	7.1
	in.	2.8
Net Weight:	gm.	64
	lb.	.14

For more information, call your local HP sales office listed in the telephone directory white pages. Ask for the Electronic Instruments Department. Or write to Hewlett-Packard: U.S.A. 10301, Palo Alto, CA 94303-0890. **Europe** — P.O. Box 999, 1180 Amstelveen, the Netherlands. **Canada** — 6877 Goreway Drive, Mississauga, L4V 1M8, Ontario. **Japan** — Hewlett-Packard Ltd., 3-29-21, Takaide-Higashio, Suginami-ku, Tokyo 168. Elsewhere in the world, write to Hewlett-Packard Intercontinental, 3495 Deer Creek Road, Palo Alto, CA 94303-0890.

5953-6492

Data Subject to Change.

Printed in U.S.A.