


Agilent E2291A 16-Channel Isolated Digital Output M-Module

Data Sheet

- Single wide, register based
- Provides isolated digital output or external relay driver
- Outputs isolated from chassis
- 16-bit universal timer (0.031 - 2089 msec)

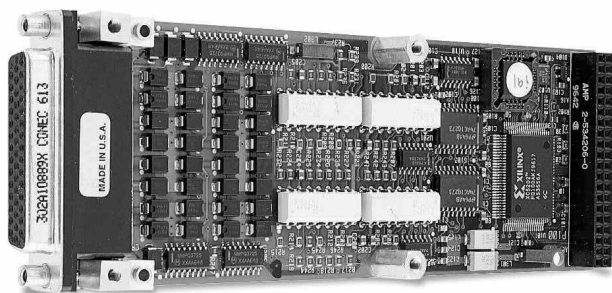

Agilent E2291A

Description

The Agilent E2291A 16-Channel Isolated Digital Output Module is a single-wide, register-based M-Module. It provides 16 channels of isolated open-collector digital output in four groups of four. Each group requires its own +5 Vdc power supply (supplied by user). You can use channels as digital outputs or as drivers for external relays. All channels have their own ground, isolated from the chassis, can sink up to 200 mA each, and can switch voltages up to 36 V.

With each M-Module having its own address within the E2250A and E2251A M-Module carriers, you have the flexibility to use the M-Modules in many combinations. This flexibility allows you to get the amount of functionality you need in smaller blocks, lowering your overall system costs. Please see the E2250A or E2251A Technical Specifications for M-Module slot requirements.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

Product Specifications

General Characteristics

Number of channels:	16
Channel type:	1 or 0
Output or input type:	Open-collector
Memory:	n/a
Max. pattern rate:	n/a
32-bit block transfer:	n/a
Test synchronization:	n/a
Logic levels:	n/a
Open collector-emitter voltage:	36 V
Saturation collector-emitter voltage (DC):	<0.5 V
Sink current (DC):	200 mA
Isolation voltage (DC):	60 V
Programmable busy time:	0.031875 msec - 2089 msec

Data Lines

Output characteristics:	
I_{out} (High):	0
I_{out} (Low):	200 mA
Input characteristics:	
I_{in} (High):	n/a
I_{in} (Low):	n/a
V_{in} (High):	n/a
V_{in} (Low):	n/a

Handshake Lines

Output characteristics:	
I_{out} (High):	n/a
I_{out} (Low):	n/a
Input characteristics:	
I_{in} (High):	n/a
I_{in} (Low):	n/a
V_{in} (High):	n/a
V_{in} (Low):	n/a

Block Mode Transfers

8-bit wide:	n/a
16-bit wide:	n/a

M-Module Characteristics

Output connector type:	44-pin D-Sub (female)
Standard compliance:	IDENT, A08, D16, INTC
Accessory:	44-pin D-Sub (male) with plastic housing

General Specifications

VXI Characteristics

VXI device type:	Register based
Data transfer bus:	n/a
Size:	n/a
Slots:	n/a
Connectors:	n/a
Shared memory:	n/a
VXI busses:	n/a
C-size compatibility:	Yes with E2251A

Instrument Drivers

See the Agilent Technologies Website (http://www.agilent.com/find/inst_drivers) for driver availability and downloading.

Command module firmware:	Downloadable
Command module firmware rev:	A.08
I-SCPI Win 3.1:	No
I-SCPI Series 700:	No
C-SCPI LynxOS:	No
C-SCPI Series 700:	No
Panel Drivers:	No
VXIplug&play Win Framework:	No
VXIplug&play Win 95/NT Framework:	Yes
VXIplug&play HP-UX Framework:	No


Module Current

	I_{PM} (A)	I_{DM} (A)
+5 V:	0.2 A	0.19 A
+12 V:	0	0
-12 V:	0	0
+24 V:	0	0
-24 V:	0	0
-5.2 V:	0	0
-2 V:	0	0

Ordering Information

Description	Product No.
16-Ch Isolated Digital Output M-Module	E2291A

E2291A Circuit Diagram

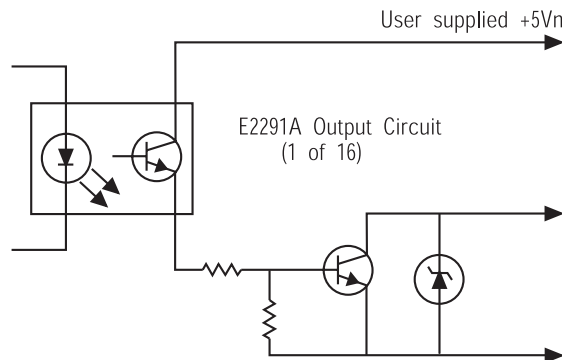

Related Literature

2000 Test System and VXI Catalog CD-ROM,
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

2000 Test System and VXI Catalog,
Agilent Pub. No. 5980-0307E (overview of VXI products)

1998 Test System and VXI Products Data Book,
Agilent Pub. No. 5966-2812E

Online

Internet access for Agilent product information, services and support
www.agilent.com/find/tmdir

VXI product information
www.agilent.com/find/vxi

Defense Electronics Applications
www.agilent.com/find/defense_ATE

Agilent Technologies VXI Channel Partners
www.agilent.com/find/vxichanpart

Agilent Technologies' HP VEE Application Website
www.agilent.com/find/vee

Agilent Technologies Data Acquisition and Control Website
www.agilent.com/find/data_acq

Agilent Technologies Instrument Driver Downloads
www.agilent.com/find/inst_drivers

Agilent Technologies Electronics Manufacturing Test Solutions
www.agilent.com/go/manufacturing

**Get assistance with all your test and measurement needs at
www.agilent.com/find/assist
or check your local phone book for the Agilent office
near you.**

Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources (www.agilent.com).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

Phone or Fax

United States:
(tel) 1 800 829 4444

Canada:
(tel) 1 877 894 4414
(fax) (905) 282 6495

China:
(tel) 800 810 0189
(fax) 800 820 2816

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (82 2) 2004 5004
(fax) (82 2) 2004 5115

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Taiwan:
(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:
(tel) (65) 6375 8100
(fax) (65) 6836 0252
(e-mail) tm_asia@agilent.com

Data Subject to Change
© Agilent Technologies, Inc. 2000
Printed in the U.S.A. May 1, 2004
5965-8819E

