

Agilent 33330B/C

Coaxial Detectors for OEM and Systems Use

Product Overview

General Information

The Agilent Technologies 33330B/C series of broadband coaxial detectors are specifically designed for use in microwave instrumentation and systems applications such as the detecting element in leveling loops, power monitoring, and as wideband video detectors.

These detectors utilize a Low Barrier Schottky (LBS) diode that requires no bias, has exceptional broadband flatness and low SWR, and is environmentally rugged. For measurement accessory applications, Agilent offers similar RF performance with a vari-

ety of input and output connectors in the Model 423B, 8470B, and 8472B series.

The Low Barrier Schottky diode detector

The 33330B/C detectors consist of a Low Barrier Schottky (LBS) diode and a miniature thin film circuit that matches the diode to a 50-ohm transmission line. The diode is a specially fabricated Schottky diode using metalization designed to achieve low origin resistance, thus eliminating the need for bias. In addition to superior RF characteristics, the LBS detector

offers significant advantages over other types of detectors. For example, a typical Schottky requires bias for proper operation; a tunnel diode detector has a limited power range because of its negative resistance region; and the point contact diode, because of its fragile construction, is unsuitable for many field applications.

Frequency Range

- Broadband (0.01 to 26.5 GHz)
- Excellent flatness (± 0.6 dB to 18 GHz)
- Low SWR (< 1.5 to 18 GHz)
- Environmentally rugged (MIL-STD-883 tests)
- Field replaceable diode modules
- APC 3.5-mm connector (reliable, SMA compatible)
- Low Barrier Schottky diode (no bias required)




Agilent Technologies

Innovating the HP Way

Since only metallurgical bonds are used with the diode, the detectors are extremely rugged. As noted on page 4, the detectors have undergone extensive environmental testing to MIL-STD 883 procedures, an important factor in military systems applications. The detector can also withstand high RF power levels for short durations without burnout, important for power monitoring applications. For example, it can typically withstand 1 watt CW for a minute without permanent damage.

The equivalent circuit and pulse response equations for the 33330B/C detectors are shown in Figures 1 and 2, and extensive data on the performance of the detectors is given on page 3. Using this information, the user can select a load to extend the square law region to higher power levels or to minimize the output variation over a given temperature range.

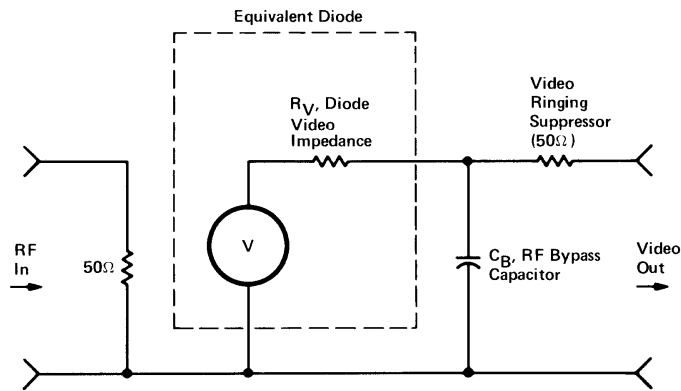

Typical Values:

$$R_V \text{ (Diode Video Impedance)} \cong 1.3 \text{ k}\Omega$$

$$C_B \text{ (RF Bypass Capacitor)} \cong 30 \text{ pF nominal}$$

$$T_R \text{ (10 to 90\% Risetime)} \cong 2.2 \frac{(R_{LOAD})(R_V)}{R_{LOAD} + R_V} (C_B + C_{LOAD})$$

* @25°C and $P_{IN} < -20 \text{ dBm}$ (see Figure 7)

Figure 1. Equivalent circuit for the Agilent 33330B/C detectors with typical parameter values

Excellent broadband flatness

The thin film input matching circuit was optimized for flat frequency response and low SWR, which yields improved performance in leveling loops and power monitoring applications. Use of thin film fabrication techniques for the circuit and diode results in excellent unit-to-unit repeatability of performance, and thus matched pairs will track within a few tenths of a dB over the entire frequency range (see Figure 2). This feature is especially important in the 20 to 26.5 GHz frequency range where diode capacitance causes the sensitivity to decrease by 3.3 dB, yet this “roll off” characteristic is very repeatable and matched pairs will track within $\pm 0.5 \text{ dB}$.

Low SWR

The miniature thin film circuit used provides an excellent 50-ohm match to the transmission line, which mini-

mizes reflections that cause frequency response ripple and power measurement inaccuracies. Such errors can be significant. For example, using a detector with an SWR of 2.5:1 in an application with a 2:1 source match can result in more than a $\pm 1.3 \text{ dB}$ ripple. For the same source match of 2:1, a typical 33330B detector with SWR less than 1.25 would have less than $\pm 0.4 \text{ dB}$ ripple.

APC 3.5-mm connector improves performance and extends frequency range

The Agilent 33330B/C detectors use the APC-3.5 connector, which is compatible with the industry standard SMA but is more rugged and offers improved repeatability over hundreds of connections. Use of this connector extends the frequency range of the 33330C to 26.5 GHz.

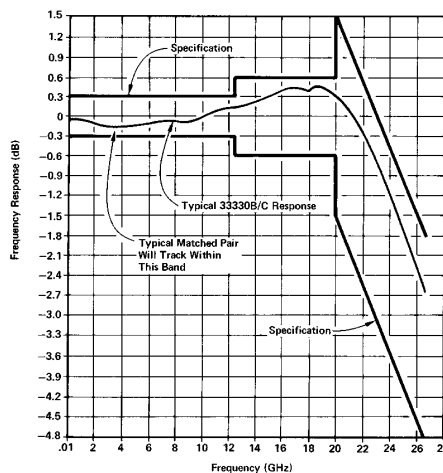


Figure 2. Typical frequency response of the Agilent 33330B/C detectors

Detector Performance Characteristics

Typical transfer characteristics

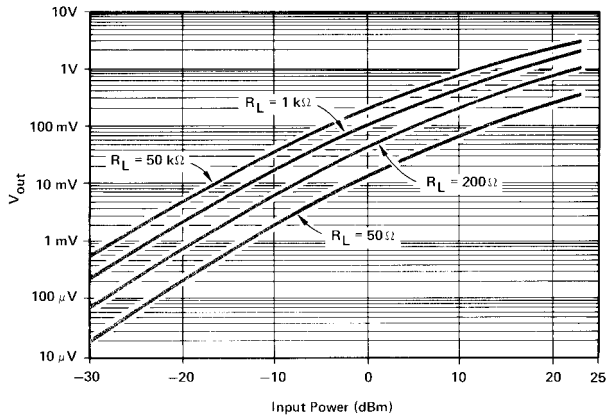


Figure 3. Typical transfer characteristics ($T_a = 25^\circ\text{C}$)

Typical temperature characteristics

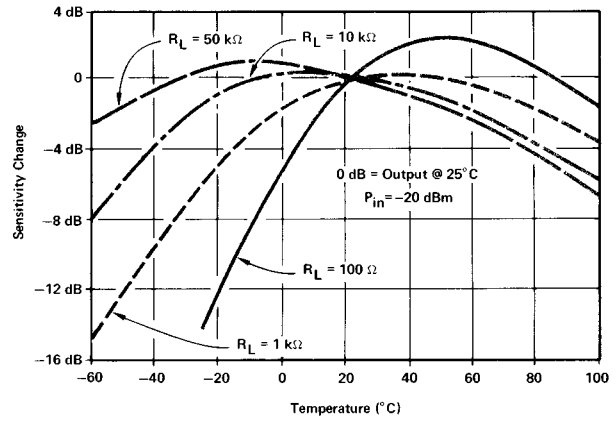


Figure 6. Typical output response with temperature ($P_{in} < -20\text{ dBm}$)

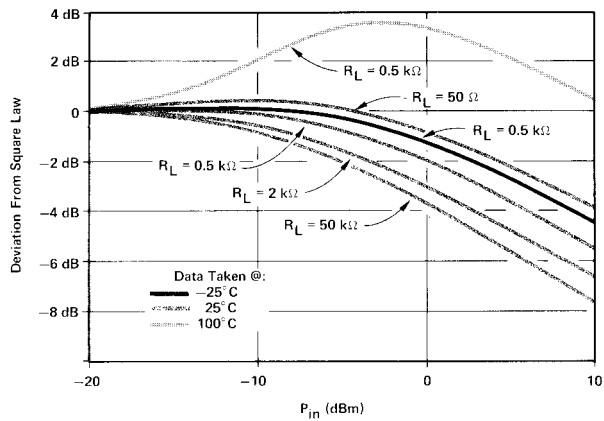


Figure 4. Typical square law deviation

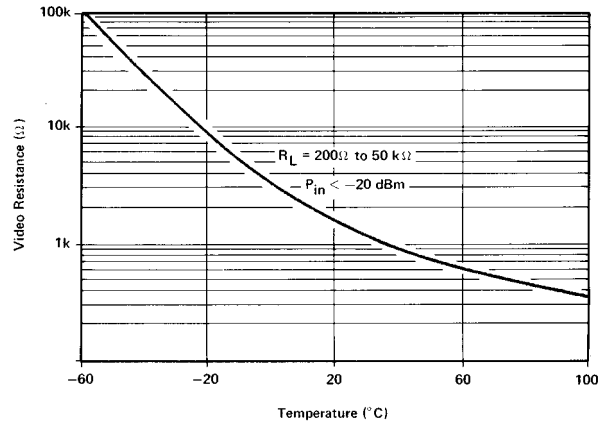


Figure 7. Typical video impedance variation with temperature

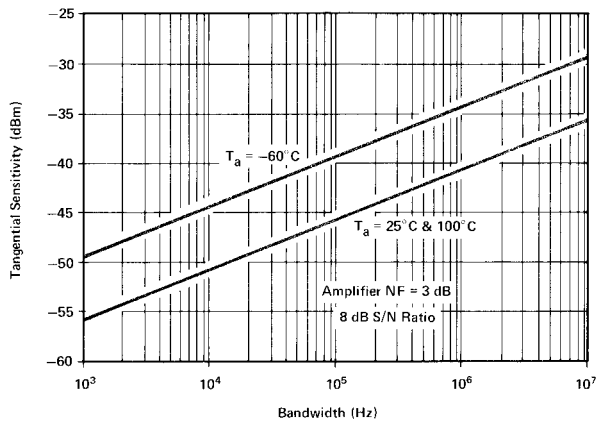


Figure 5. Typical tangential sensitivity

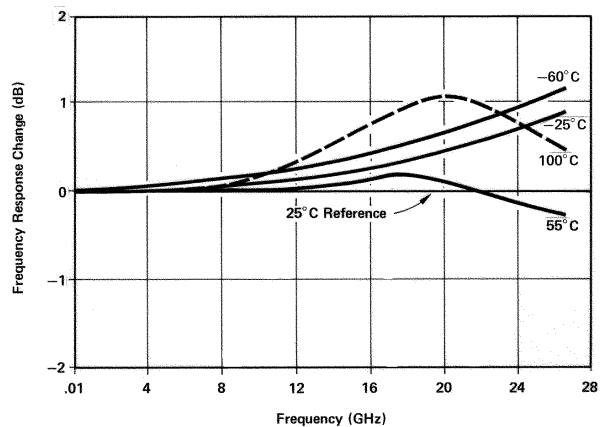



Figure 8. Typical frequency response variation with temperature

Specifications¹

	33330B	33330C
Frequency range²	0.01 to 18 GHz	0.01 to 26.5 GHz
Frequency response		
Octave band flatness	±0.2 dB over any octave to 8 GHz	±0.2 dB over any octave to 8 GHz
Broadband flatness	0.01 to 12.4 GHz: ±0.3 dB	0.01 to 12.4 GHz: ±0.3 dB
	0.01 to 18 GHz: ±0.6 dB	0.01 to 20 GHz: ±0.6 dB
SWR	0.01 to 4 GHz: 1.2	0.01 to 4 GHz: 1.2
	0.01 to 18 GHz: 1.5	4 to 18 GHz: 1.5
		18 to 26.5 GHz: 2.2
Low level sensitivity	>0.5 mV/μW	0.01 to 18 GHz: >0.5 mV/μW 18 to 26.5 GHz: >0.18 mV/μW
Maximum operating input	200 mW	
Typical short-term maximum input (less than 1 minute)	1 watt (typical)	
Noise (μV peak to peak with CW power applied to produce 100 mV output, 400 kHz BW)	<50 μV	
Output polarity	Negative	
Option 001³		
Matched pair	0.01 to 12.4 GHz: ±0.2 dB	0.01 to 12.4 GHz: ±0.2 dB
	0.01 to 18 GHz: ±0.3 dB	0.01 to 18 GHz: ±0.3 dB
		0.01 to 26.5 GHz: ±0.5 dB
Option 003 Positive output		
Environmental capabilities⁴		
Operating temperatures ⁵	-65° C to 100° C	
Temperature cycling	MIL-STD 883. Method 1010.1: (-65° C to ±100° C)	
Vibration	MIL-STD 883. Method 2007 0.6'' D.A. (20 to 80 Hz) and 20 G (80 to 2000 Hz)	
Shock	MIL-STD 883. Method 2002.1 (500 G. 0.5 ma)	
Acceleration	MIL-STD 883. Method 2001 (5000 G)	
Altitude ⁶	MIL-STD 883. Method 1001: (50,000 ft. 15 240 m)	
Salt atmosphere ⁷	MIL-STD 883. Method 1009.1: (48 hr. 5% solution)	
Moisture resistance		
With epoxy coating ⁷	MIL-STD 883. Method 1004.1: (25° C to 65° C, 95% RH)	
Without coating	25° C to 40° C, 95% RH	

Field replaceable diode modules

In the event of diode burnout, the detector module can be replaced in the field. Since the replacement module includes the tested and sealed assembly of diode and thin-film matching circuit, the user is assured of performance to specifications. This offers an advantage over detector designs where only the diode is replaced and not tested in its final assembly.

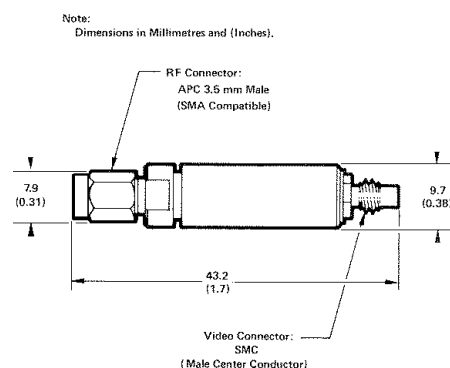

Outline drawing

1. Measured at 25° C and <-20 dBm unless otherwise specified.
2. Below 1 GHz RF may leak through the video connector. If objectionable, this may be eliminated with a low pass filter.
3. Quantity two (2) must be ordered for each matched pair.
4. Additional information available upon request.
5. Typical variations with temperature are shown on page 3.
6. Tested only to 50,000 ft (15,240 m), capable of much higher performance.
7. Use of an epoxy coating is required for meeting these requirements. Contact your Agilent Components Field Engineer for details.

Model number	Description	Replacement module part number
33330B	Negative polarity	33330-80003
33330B Option 001	Matched pair (negative)	33330-80004
33330B Option 003	Positive polarity	33330-80005
33330C	Negative polarity	33330-80006
33330C Option 001	Matched pair (negative)	33330-80007
33330C Option 003	Positive polarity	33330-80008

Mechanical information

RF connector	APC-3.5 male (SMA compatible)
Output connector	SMC (male center conductor)
Net weight	14 g (0.5 oz)

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

"Our Promise" means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

"Your Advantage" means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

Get assistance with all your test and measurement needs at:

www.agilent.com/find/assist

Product specifications and descriptions in this document subject to change without notice.

Copyright © 1997, 2000 Agilent Technologies
Printed in U.S.A. 4/00
5952-8164E



Agilent Technologies

Innovating the HP Way