

Description

The S4558 is a monolithic Integrated Circuit designed for dual operational amplifier.

Features

- Power consumption as small as about 50mW (typ.)
- Built-in output short-circuit protecting circuit.
- Internal phase consumption type.
- No latch-up
- Wide same phase mode and differential voltage ranges
- High gain. low noise

Applications


- Active filters
- Audio amplifiers
- VCOs
- Other electronic circuits

Ordering Information

Type NO.	Marking	Package Code
S4558P	S4558P	DIP-8

Outline Dimensions

unit : mm

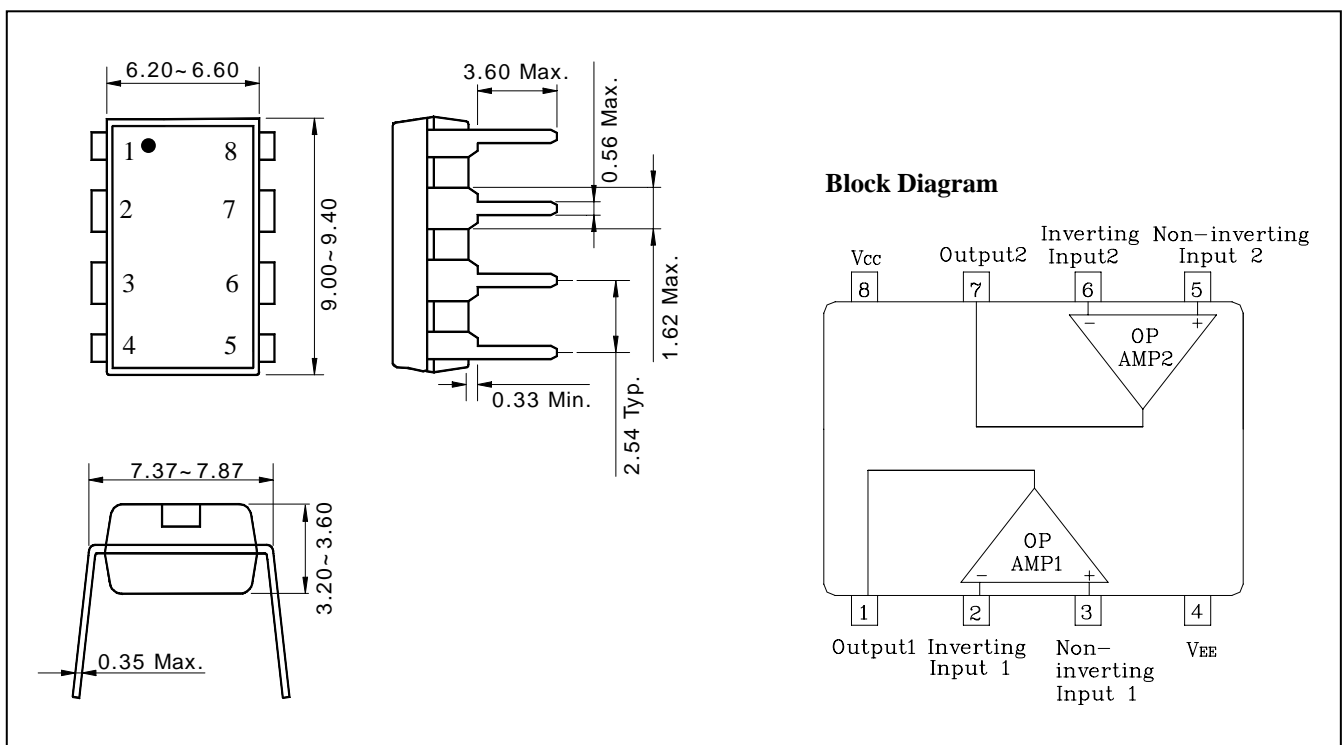

Absolute maximum ratings

Characteristic	Symbol	Ratings	Unit
Supply voltage	V_{CC}	36 or ± 18	V
Differential input voltage	V_{IND}	30	V
Input voltage	V_{IN}	± 15	V
Power Dissipation	P_D	500	mW
Operating temperature	T_{opr}	-45 ~ +85	°C
Storage temperature	T_{stg}	-55 ~ +150	°C

Electrical Characteristics

(Unless otherwise specified. $V_{CC} = +15V$, $V_{EE} = -15V$ and $T_a = 25\text{ }^{\circ}\text{C}$)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input offset voltage	V_{IOS}	$R_g \leq 10\text{ k}\Omega$	-	0.5	6	mV
Input offset current	I_{IOS}	-	-	5	200	nA
Input bias current	I_{IB}	-	-	60	500	nA
Input common mode Voltage Range	V_{ICR}	-	± 12	± 14	-	V
Maximum Output Voltage	V_{OM}	$R_L \geq 10\text{ k}\Omega$	± 12	± 14	-	V
		$R_L \geq 2\text{ k}\Omega$	± 10	± 13	-	V
Large signal Voltage Gain	G_V	$V_{out} = \pm 10V$, $R_L \geq 2\text{ k}\Omega$	86	100	-	dB
Common mode rejection ratio	CMRR	$R_g \leq 10\text{ k}\Omega$	70	90	-	dB
Power supply rejection ratio	PSRR	$R_g \leq 10\text{ k}\Omega$	-	30	150	$\mu\text{V/V}$
Slew Rate	SR	$G_V = 1$, $R_L \geq 2\text{ k}\Omega$	-	1.0	-	V/ μs
Supply Current	I_{CC}	-	-	4.0	6.0	mA
Equivalent input noise voltage	V_{NI}	RIAA, $R_S = 1\text{ k}\Omega$, $f = 30\text{ Hz} \sim 30\text{ kHz}$	-	2.5	-	μV_{rms}
Source Current	I_{SOURCE}	-	27	-	-	mA
Sink Current	I_{SINK}	-	27	-	-	mA

Electrical Characteristic Curves

Fig. 1 $G_V - f$

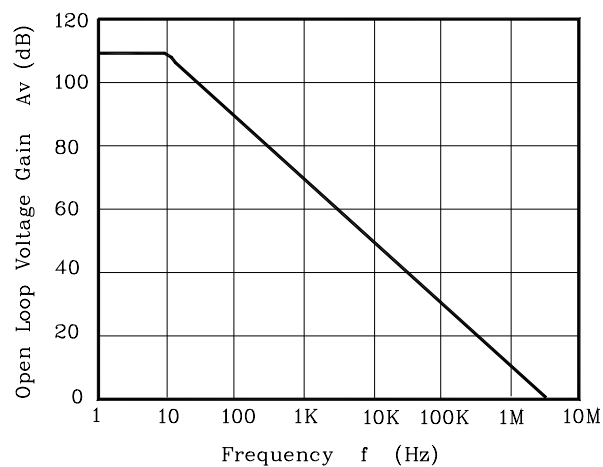


Fig. 2 $V_{OP-P} - f$

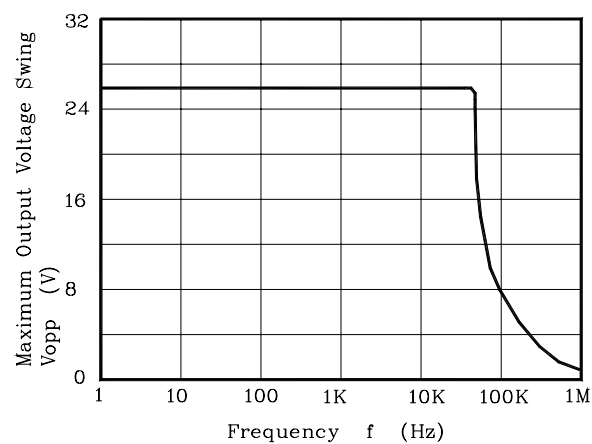


Fig. 3 $I_{IB} - T_a$

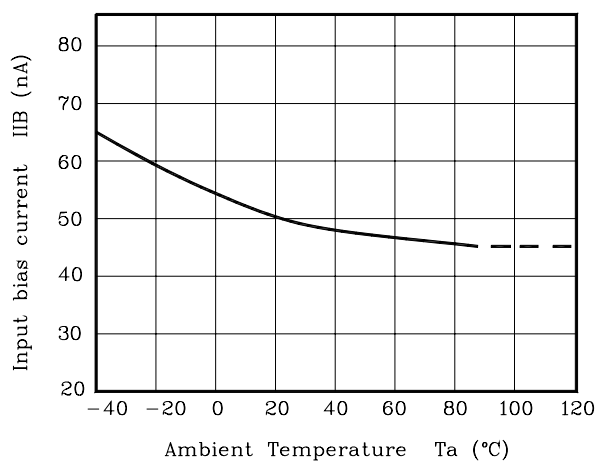


Fig. 4 $V_{OM} - V_{CC}, V_{EE}$

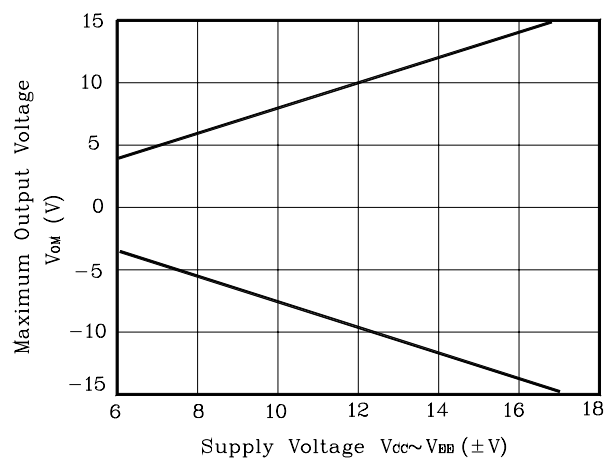


Fig. 5 $V_{OP-P} - R_L$


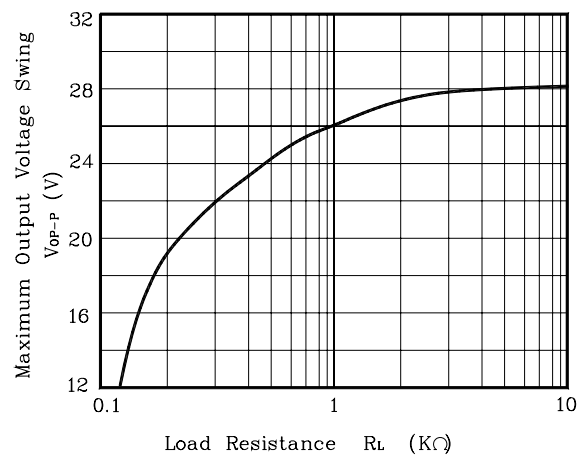


Fig. 6 $V_{NI} - f$

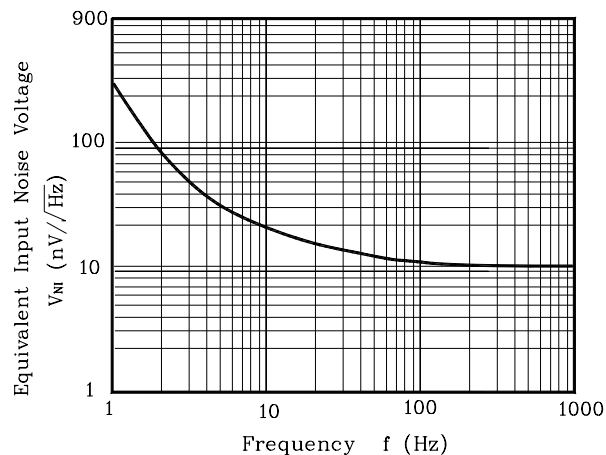

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.