


AUTOMOTIVE CURRENT TRANSDUCER

HAH1BV S/20

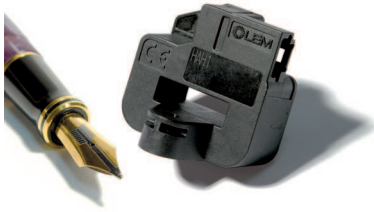

Introduction

The HAH1BV family is for the electronic measurement of DC, AC or pulsed currents in high power automotive applications with galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).

The HAH1BV family gives you the choice of having different current measuring ranges in the same housing (from ± 200 A up to ± 900 A).

Features

- Open Loop transducer using the Hall effect
- Unipolar + 5 V DC power supply
- Primary current measuring range up to ± 500 A
- Maximum RMS primary current limited by the busbar, the magnetic core or the ASIC temperature $T^\circ < + 150^\circ\text{C}$
- Operating temperature range: $- 40^\circ\text{C} < T^\circ < + 125^\circ\text{C}$
- Output voltage: full ratiometric (in sensitivity and offset)
- Compact design.

Advantages

- Excellent accuracy
- Very good linearity
- Very low thermal offset drift
- Very low thermal sensitivity drift
- Wide frequency bandwidth
- No insertion losses.

Automotive applications

- Battery monitoring
- Starter Generators
- Inverters
- HEV application
- EV application.

Principle of HAH1BV Family

The open loop transducers uses a Hall effect integrated circuit.

The magnetic flux density **B**, contributing to the rise of the Hall voltage, is generated by the primary current I_p to be measured.

The current to be measured I_p is supplied by a current source i.e. battery or generator (Fig. 1).

Within the linear region of the hysteresis cycle, **B** is proportional to:

$$\mathbf{B} (I_p) = \text{constant} (a) \times I_p$$

The Hall voltage is thus expressed by:

$$\mathbf{V}_H = (R_H/d) \times l \times \text{constant} (a) \times I_p$$

Except for I_p , all terms of this equation are constant. Therefore:

$$\mathbf{V}_H = \text{constant} (b) \times I_p$$

The measurement signal $\mathbf{V}_H$ amplified to supply the user output voltage or current.


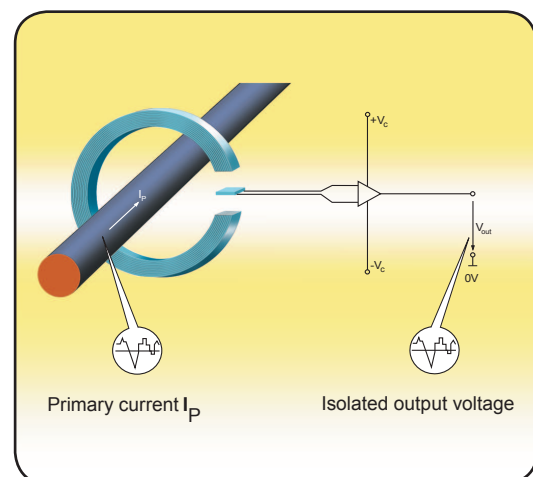


Fig. 1: Principle of the open loop transducer

HAH1BV S/20

Dimensions HAH1BV family (in mm.)

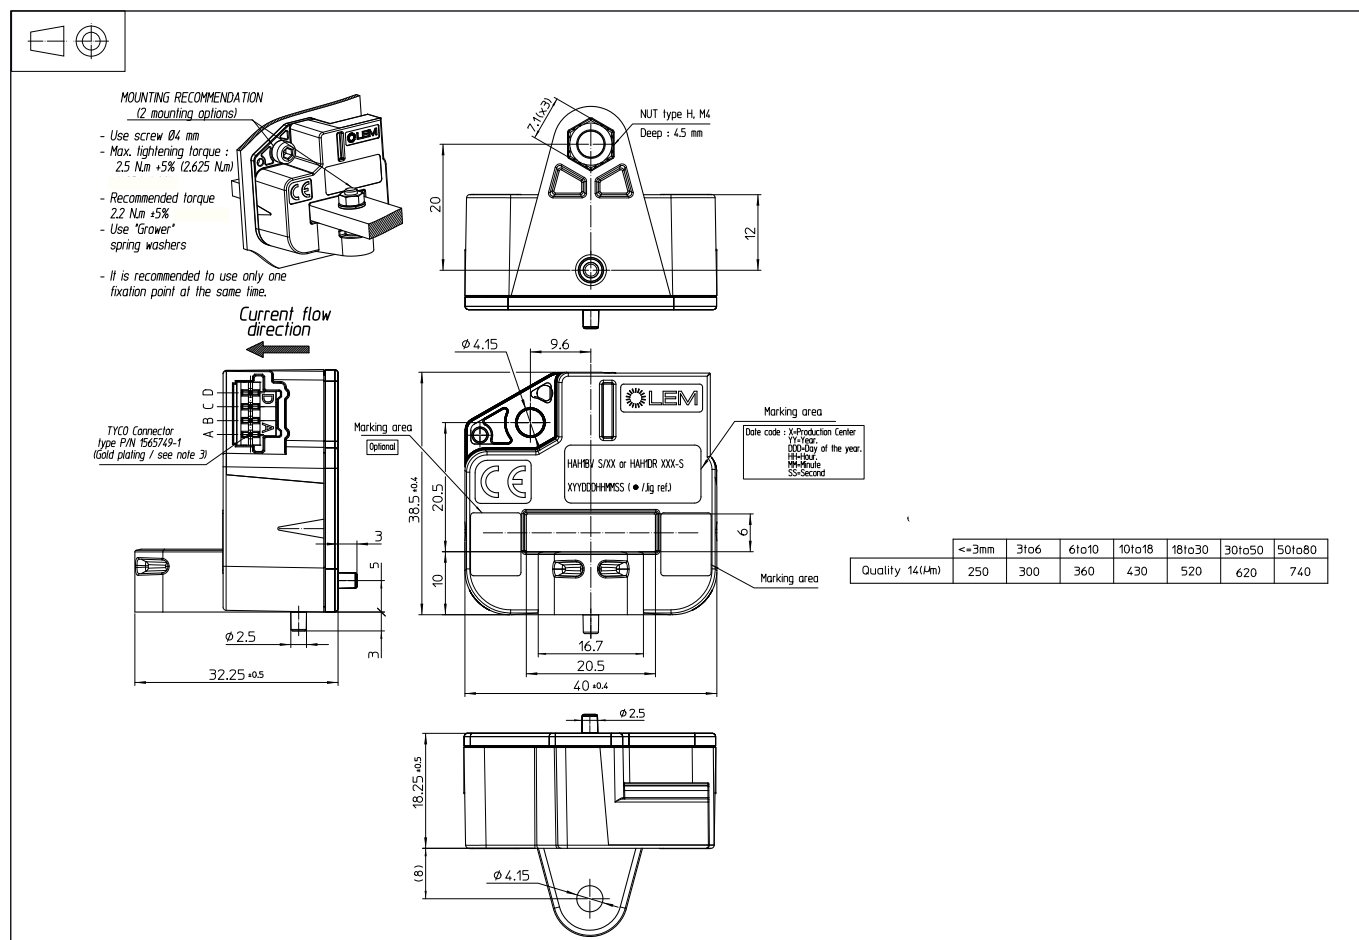

Bill of materials

- Plastic case PBT GF 30
- Magnetic core Iron silicon alloy
- Pins Brass gold plated
- Mass 39 g

Remarks

- $V_{OUT} > \frac{V_C}{2}$ when I_P flows in the direction of the arrow.

System architecture (example)



R₁ > 10 kΩ optional resistor for signal line diagnostic

V_{OUT}	Diagnosis
Open circuit	$V_{IN} = V_C$
Short GND	$V_{IN} = 0V$

C_l < 100 nF EMC protection

RC Low pass filter EMC protection (optional)

System architecture

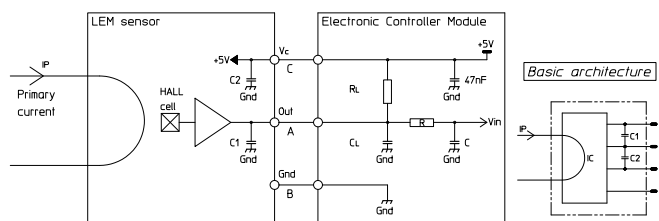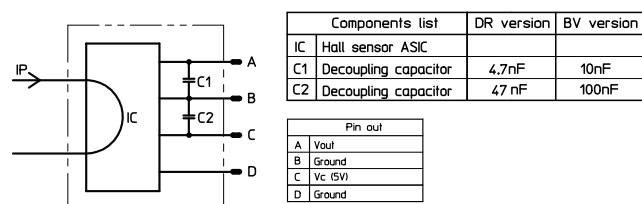

HAH1BV S/20

Absolute maximum ratings

	Symbol	Unit	Specification			Conditions
			Min	Typ	Max	
Electrical Data						
Maximum primary current peak	I _{Pmax}	A			1)	
Supply continuous over voltage	V _C	V			8.5	
Supply over voltage					14	1 min
Reverse voltage			-14			1 min @ T _A = 25°C
Output over voltage (continuous)	V _{OUT}	V			8.5	
Output over voltage					14	1 min @ T _A = 25°C
Continuous output current	I _{OUT}	mA	-10		10	
Output short-circuit duration	t _c	min			2	
Rms voltage for AC isolation test	V _d	kV			2	50 Hz, 1 min
Isolation resistance	R _{IS}	MΩ	500			500 V - ISO 16750-2
Electrostatic discharge voltage	V _{ESD}	kV			2	JESD22-A114-B
Ambient storage temperature	T _S	°C	-40		125	

Operating characteristics

	Symbol	Unit	Specification			Conditions
			Min	Typ	Max	
Electrical Data						
Primary current	I _P	A	-500		500	
Calibration current	I _{CAL}	A	-500		500	@ T _A = 25°C
Supply voltage	V _C	V	4.5	5.00	5.5	
Output voltage	V _{OUT}	V	V _{OUT} = (V _C /5) × (2.5 + G × I _P)			@ V _C
Sensitivity ²⁾	G	mV/A		4		@ V _C = 5 V
Current consumption	I _C	mA		7	10	@ V _C = 5 V, - 40°C < T _A < 125°C
Power up inrush current		mA			15	@ V _C < 3.5 V
Load resistance	R _L	KΩ	10			
Output internal resistance	R _{OUT}	Ω			10	
Capacitive loading	C _L	nF	1		100	
Ambient operating temperature	T _A	°C	-40		125	
Output drift versus power supply		%	-1	0.3	1	
Performance Data						
Sensitivity error	ε _G	%	-1.0	± 0.5	1.0	@ T _A = 25°C, '@ V _C = 5 V
Electrical offset current	I _{OE}	A		± 1		@ T _A = 25°C, '@ V _C = 5 V
Magnetic offset current	I _{OM}	A		± 1.2		@ T _A = 25°C, '@ V _C = 5 V after ± I _P
Globale offset current	I _O	A		± 2.2		@ T _A = 25°C
			- 3.8		3.8	
Average temperature coefficient of V _{OE}	TCV _{OE AV}	mV/°C	-0.06	± 0.02	0.06	@ - 40°C < T _A < 125°C
Average temperature coefficient of G	TCG _{AV}	%/°C	-0.04	± 0.02	0.04	@ - 40°C < T _A < 125°C
Linearity error	ε _L	%	-1.0		1.0	of full range
Response time to 90 % of I _{PN} step	t _t	ms			5	@ di/dt = 50 A/μs
Frequency bandwidth	BW	Hz			80	@ -3 dB
Output clamping min voltage	V _{sz}	V	0.24	0.25	0.26	@ V _C = 5 V
Output clamping max voltage	V _{sz}	V	4.74	4.75	4.76	@ V _C = 5 V
Output voltage noise peak peak	V _{no pp}	mV	-		10	
Resolution		mV		2.5		@ V _C = 5 V
Power up time		ms		25	100	
Setting time after overload		ms			25	


Notes: ¹⁾ Busbar temperature must be below 150°C.

²⁾ The output voltage V_{OUT} is fully ratiometric. The offset and sensitivity are dependent on the supply voltage V_C relative to the following formula:


$$I_P = \left(V_{OUT} - \frac{V_C}{2} \right) \times \frac{1}{G} \times \frac{5}{V_C} \quad \text{with } G \text{ in (V / A)}$$

HAH1BV S/20


HAH1BV S/20 Gain Error (%)

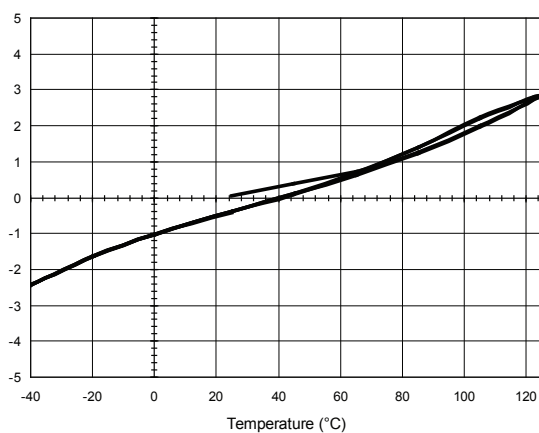


HAH1BV S/20 Electrical offset Error (A)

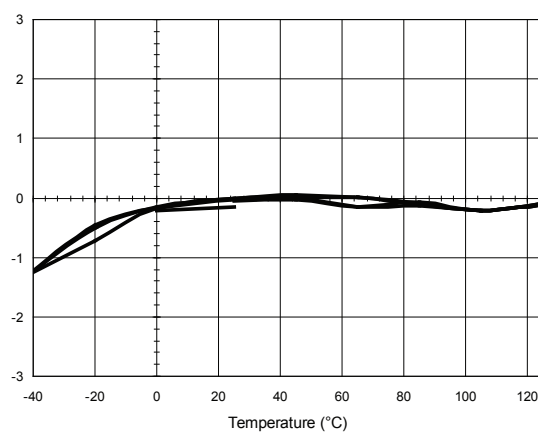


HAH1BV S/20 Frequency Bandwidth

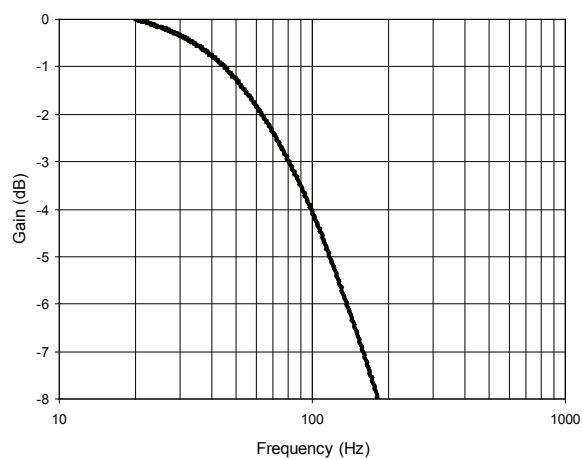

HAH1BV S/20 Phase

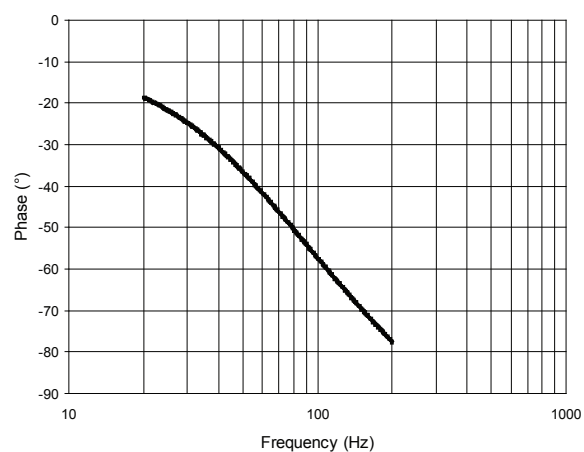

Typical Response Time (ms)
 $di/dt = 100A/\mu s$

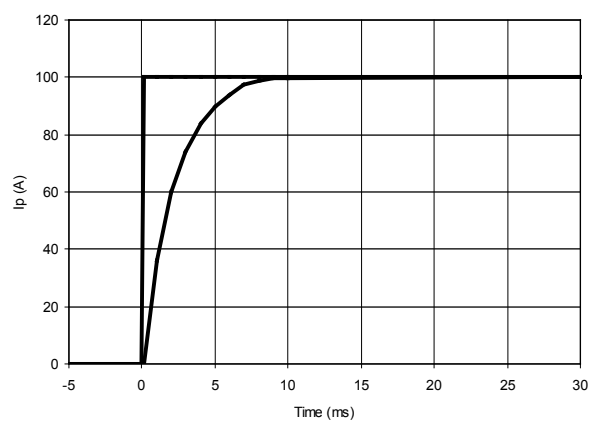

HAH1BV S/20

PERFORMANCES PARAMETERS DEFINITIONS

Output noise voltage:

The output voltage noise is the result of the noise floor of the Hall elements and the linear I_c amplifier gain.

Magnetic offset:


The magnetic offset is the consequence of an over-current on the primary side. It's defined after an excursion of $I_{p\max}$.

Linearity:

The maximum positive or negative discrepancy with a reference straight line $V_{OUT} = f(I_p)$.


Unit: linearity (%) expressed with full scale of $I_{p\max}$.

Linearity is measured on cycle + I_p , 0, - I_p , 0, + I_p without magnetic offset (average values used)

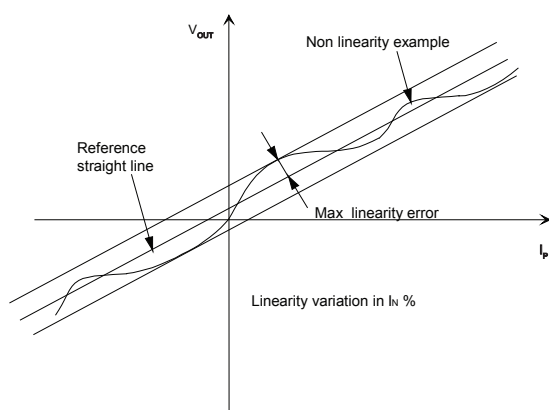

Response time (delay time) t_r :

The time between the primary current signal and the output signal reach at 90 % of its final value

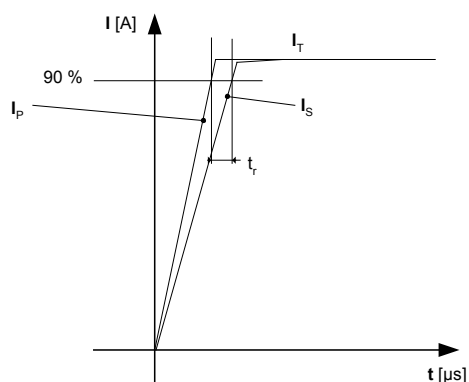

Typical:

Theoretical value or usual accuracy recorded during the production.

Sensitivity:

The Transducer's sensitivity G is the slope of the straight line

$V_{out} = f(I_p)$, it must establish the relation:

$$V_{out}(I_p) = V_c/5 (G \times I_p + 2.5) (*)$$

(*) For all symetrics transducers.

Offset with temperature:

The error of the offset in the operating temperature is the variation of the offset in the temperature considered with the initial offset at 25°C.

The offset variation I_{OT} is a maximum variation the offset in the temperature range:

$$I_{OT} = I_{OE\max} - I_{OE\min}$$

The Offset drift TCI_{OEAV} is the I_{OT} value divided by the temperature range.

Sensitivity with temperature:

The error of the sensitivity in the operating temperature is the relative variation of sensitivity with the temperature considered with the initial offset at 25°C.

The sensitivity variation G_T is the maximum variation (in ppm or %) of the sensitivity in the temperature range:

$$G_T = (Sensitivity\ max - Sensitivity\ min) / Sensitivity\ at\ 25^\circ C.$$

The sensitivity drift TCG_{AV} is the G_T value divided by the temperature range.

Offset voltage @ $I_p = 0$ A:

Is the output voltage when the primary current is null. The ideal value of V_o is $V_c/2$ at $V_c = 5$ V. So, the difference of $V_o - V_c/2$ is called the total offset voltage error. This offset error can be attributed to the electrical offset (due to the resolution of the ASIC quiescent voltage trimming), the magnetic offset, the thermal drift and the thermal hysteresis.

Environmental test specifications

Name	Standard	Conditions
Damp heat, steady state	JESD22-A101	85°C - 85°C / 1000h
Isolation resistance	ISO 16750-2 § 4.10	500 V/1min
Temperature humidity cycle test	ISO 16750-4	-10 + 85°C 10 days
Isolation test	IEC 60664-1	2 kV/50 Hz/1min
Mechanical tests		
Vibration test (random)	IEC 60068-2-64 ISO 16750-3 & 4.1.6.1.6	20 ... 2000 Hz Random rms (11g rms) 8h/axis
Terminal strength test	According to LEM	
Thermal shocks	IEC 60068-214 Na	-40 + 125°C 300 cycles
Free fall	ISO 16750-3 § 4.3	1m concrete ground
EMC Test		
Radiated electromagnetic immunity	Directive 2004/104/CE ISO 11452-2	30 V/m 20-2000 MHz
Bulk current injection immunity	Directive 2004/104/CE ISO 11452-4	1-400 MHz
Radiated radio frequency electromagnetic field immunity	IEC 61000-4-3	80 MHz to 1,000 MHz - 10 V/m
Electrostatic discharge immunity test	IEC 61000-4-2	Air discharge=2 kV