


# Agilent Technologies 5361B Pulse/ CW Microwave Counter

Data Sheet

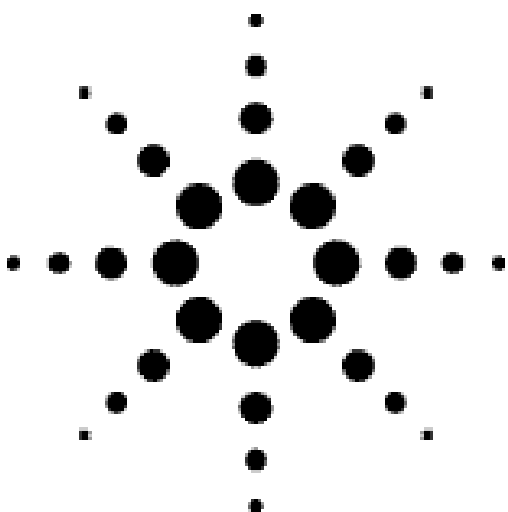

## Product Specifications

### Input Characteristics

Input 1	Input 2	Input 2
(50 Ω)	(1 MΩ)	(50 Ω)
Frequency range	500 MHz to 20, 10 Hz to 10 MHz to 26.5, 40 GHz	80 MHz 525 MHz
Sensitivity	25 mV rms	25 mV rms
0.5 to 12.4 GHz	-28 dBm	
12.4 to 20 GHz	-23 dBm	
0.5 to 26.5 GHz	-20 dBm	
(Opt 026, 040)		
26.5 to 40 GHz	$0.37 \times f$ (in GHz)	
(Opt 040)	-29.8 dBm	

### Frequency (Input 1)

Automatic and Manual Acquisition: 500 MHz to 20 GHz; 500 MHz to 26.5 GHz (Option 026); 500 MHz to 40 GHz (Option 040)

Least Significant Digit: 1 MHz to 1 Hz for frequency, 0.001 Hz for PRF

### Pulse Frequency Measurements

Pulse width (minimum): manual mode, 60 ns; auto mode, 100 ns  
Pulse rep freq: minimum 1 Hz; maximum 2 MHz  
Measurement time, resolution, accuracy: See datasheet

### CW Frequency Measurements

FM tolerance: 55 MHz peak-to-peak  
Tracking speed (fast acquisition): 800 MHz/s  
Acquisition time: Manual mode, <40 ms; automatic mode, fast acq., <100 ms  
Gate times (1 Hz resolution): 200 to 1000 ms  
Measurement time: >8.5 ms (in Dump Mode)  
Accuracy: See datasheet

### Pulse Parameters (Input 1)

Pulse Width	PRI	Offtime	PRF
Min./Max.	60 ns/10 ms	500 ns/1 s	400 ns/1s 1Hz/2 MHz to 0.001 Hz
LSD (PW <1 ms)	1 ns	(PW	

>  
) 100 nx  
Accuracy:  $\pm(20 \text{ nx} + \text{timebase uncertainty} \times \pm(20 \text{ nx}) \times (\text{PRF})^2$   
(100 ave.) measurement  $\pm\text{LSD} \pm\text{LSD} \pm\text{timebase uncertainty}$

**Profile (Input 1)**

Frequency Range (min/max for Y axis): 500 MHz/40 GHz  
FM Chirp Tolerance (max span for Y axis): 50 MHz peak-to-peak  
Time Range (min/max span for X axis): 100 ns/10 ms; 1 ns resolution  
Internal Gate Width: Minimum 11 ns to 23 ns; typical minimum: 14 ns  
External Gate Width: Minimum: Manual acquisition 20 ns; auto acquisition 60 ns  
Number of Data Points: Up to 100

**Profile Frequency Measurements**

Printers supported: HP 2225A, HP 227B, HP 3630A Opt 002  
Profile phase measurements: See Application Note 377-4 for details. Computer required.

**Frequency (Input 2)**

Range: 10 Hz to 525 MHz  
Accuracy: 0.001 Hz to 1 Hz  
Resolution/LSD: 0.001 to 1 Hz