



Atmel AT93C56B and Atmel AT93C66B

3-wire Automotive Temperature Serial EEPROM

2K (256 x 8 or 128 x 16) and 4K (512 x 8 or 256 x 16)

PRELIMINARY DATASHEET

Features

- Medium-voltage and standard-voltage operation
 - $V_{CC} = 2.5V$ to $5.5V$
- Automotive temperature range $-40^{\circ}C$ to $125^{\circ}C$
- User-selectable internal organization
 - 2K: 256 x 8 or 128 x 16
 - 4K: 512 x 8 or 256 x 16
- 3-wire serial interface
- Sequential Read operation
- 2MHz clock rate
- Self-timed write cycle (5ms max)
- High reliability
 - Endurance: 1 million write cycles
 - Data retention: 100 years
- Lead-free/Halogen-free devices available
- 8-lead JEDEC SOIC and 8-lead TSSOP packages

Description



The Atmel® AT93C56B/66B provides 2048/4096 bits of Serial Electrically Erasable Programmable Read-Only Memory (EEPROM). The EEPROM is organized as 128/256 words of 16 bits each when the ORG pin is connected to V_{CC} and 256/512 words of 8 bits each when it is tied to ground. The device is optimized for use in many automotive applications where low-power and low-voltage operations are essential. The AT93C56B/66B is available in space-saving 8-lead JEDEC SOIC and 8-lead TSSOP packages.

The AT93C56B/66B is enabled through the Chip Select (CS) pin and accessed via a 3-wire serial interface consisting of Data Input (DI), Data Output (DO), and Shift Clock (SK). Upon receiving a Read instruction at DI, the address is decoded and the data is clocked out serially on the data output pin DO. The write cycle is completely self-timed and no separate erase cycle is required before write. The write cycle is only enabled when the part is in the Erase/Write Enable state. When CS is brought high following the initiation of a write cycle, the DO pin outputs the Ready/Busy status of the part.

The AT93C56B/66B operates from 2.5V to 5.5V.

Figure 1. Pin Configurations

| Pin Name | Function |
|-----------------|-----------------------|
| CS | Chip Select |
| SK | Serial Data Clock |
| DI | Serial Data Input |
| DO | Serial Data Output |
| GND | Ground |
| V _{CC} | Power Supply |
| ORG | Internal Organization |
| DC | Don't Connect |




1. Absolute Maximum Ratings*

Operating Temperature -55°C to +125°C
Storage Temperature -65°C to +150°C
Voltage on any pin
with respect to ground -1.0V to +7.0V
Maximum Operating Voltage 6.25V
DC Output Current 5.0mA

*Notice: Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability

2. Block Diagram

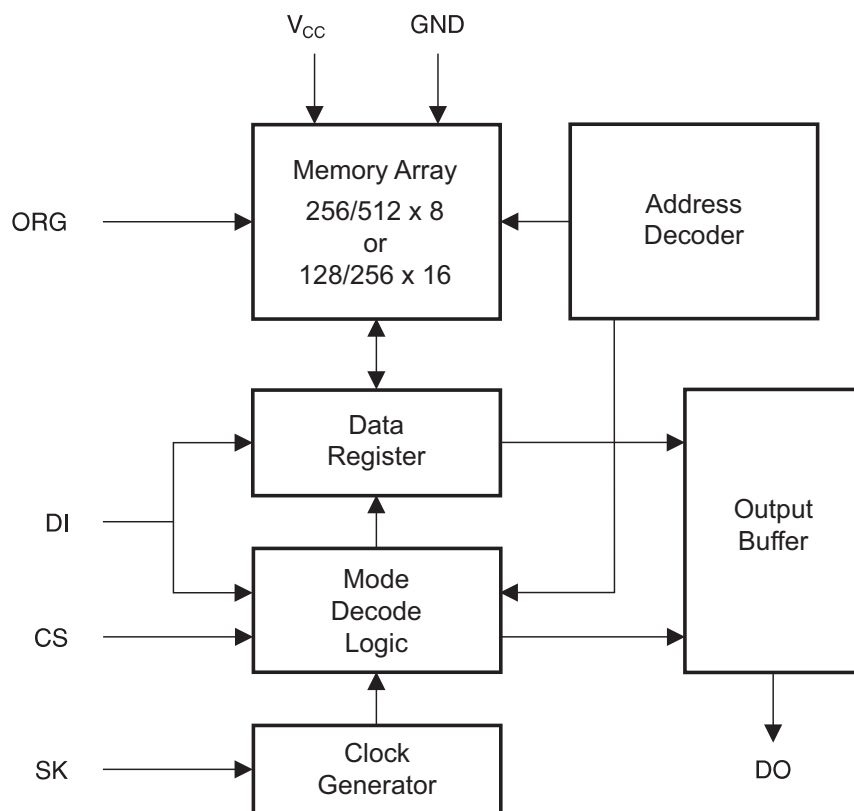

Note: When the ORG pin is connected to V_{CC} , the “x 16” organization is selected. When it is connected to ground, the “x 8” organization is selected. If the ORG pin is left unconnected and the application does not load the input beyond the capability of the internal $1m\Omega$ pullup, then the “x 16” organization is selected.

3. Electrical Characteristics

3.1 Pin Capacitance⁽¹⁾

Applicable over recommended operating range from $T_A = 25^\circ\text{C}$, $f = 1.0\text{MHz}$, $V_{CC} = +5.0\text{V}$ (unless otherwise noted)

| Symbol | Test Conditions | Max | Units | Conditions |
|-----------|--------------------------------|-----|-------|-----------------------|
| C_{OUT} | Output Capacitance (DO) | 5 | pF | $V_{OUT} = 0\text{V}$ |
| C_{IN} | Input Capacitance (CS, SK, DI) | 5 | pF | $V_{IN} = 0\text{V}$ |

Note: 1. This parameter is characterized and is not 100% tested.

3.2 DC Characteristics

Applicable over recommended operating range from: $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$,

$V_{CC} = +2.5\text{V}$ to $+5.5\text{V}$ (unless otherwise noted)

| Symbol | Parameter | Test Condition | | Min | Typ | Max | Unit |
|-----------------|---------------------|--|--------------------------|------|------|--------------|---------------|
| V_{CC1} | Supply Voltage | | | 2.5 | | 5.5 | V |
| V_{CC2} | Supply Voltage | | | 4.5 | | 5.5 | V |
| I_{CC} | Supply Current | $V_{CC} = 5.0\text{V}$ | Read at 1.0MHz | | 0.5 | 2.0 | mA |
| | | | Write at 1.0MHz | | 0.5 | 2.0 | mA |
| I_{SB1} | Standby Current | $V_{CC} = 2.5\text{V}$ | CS = 0V | | 3.0 | 10.0 | μA |
| I_{SB2} | Standby Current | $V_{CC} = 5.0\text{V}$ | CS = 0V | | 10.0 | 15.0 | μA |
| I_{IL} | Input Leakage | $V_{IN} = 0\text{V}$ to V_{CC} | | | 0.1 | 3.0 | μA |
| I_{OL} | Output Leakage | $V_{IN} = 0\text{V}$ to V_{CC} | | | 0.1 | 3.0 | μA |
| $V_{IL1}^{(1)}$ | Input Low Voltage | $2.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ | | -0.6 | | 0.8 | V |
| $V_{IH1}^{(1)}$ | Input High Voltage | | | 2.0 | | $V_{CC} + 1$ | |
| V_{OL1} | Output Low Voltage | $2.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ | $I_{OL} = 2.1\text{mA}$ | | | 0.4 | V |
| V_{OH1} | Output High Voltage | | $I_{OH} = -0.4\text{mA}$ | 2.4 | | | V |

Note: 1. V_{IL} min and V_{IH} max are reference only and are not tested.

3.3 AC Characteristics

Applicable over recommended operating range from $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, $V_{CC} = \text{As Specified}$,
CL = 1 TTL Gate and 100pF (unless otherwise noted)

| Symbol | Parameter | Test Condition | | Min | Typ | Max | Units |
|--------------------------|----------------------------|--|--|------------|-----|------------|--------------|
| f_{SK} | SK Clock Frequency | $4.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ $2.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ | | 0 0 | | 2 1 | MHz |
| t_{SKH} | SK High Time | $4.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ $2.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ | | 250 250 | | | ns |
| t_{SKL} | SK Low Time | $4.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ $2.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ | | 250 250 | | | ns |
| t_{CS} | Minimum CS Low Time | $4.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ $2.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ | | 250 250 | | | ns |
| t_{CSS} | CS Setup Time | Relative to SK | $4.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ $2.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ | 50 50 | | | ns |
| t_{DIS} | DI Setup Time | Relative to SK | $4.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ $2.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ | 100 100 | | | ns |
| t_{CSH} | CS Hold Time | Relative to SK | | 0 | | | ns |
| t_{DIH} | DI Hold Time | Relative to SK | $4.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ $2.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ | 100 100 | | | ns |
| t_{PD1} | Output Delay to "1" | AC Test | $4.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ $2.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ | | | 250 500 | ns |
| t_{PD0} | Output Delay to "0" | AC Test | $4.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ $2.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ | | | 250 500 | ns |
| t_{SV} | CS to Status Valid | AC Test | $4.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ $2.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ | | | 250 250 | ns |
| t_{DF} | CS to DO in High Impedance | AC Test CS = V_{IL} | $4.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ $2.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ | | | 100 150 | ns |
| t_{WP} | Write Cycle Time | | $2.5\text{V} \leq V_{CC} \leq 5.5\text{V}$ | | | 5 | ms |
| Endurance ⁽¹⁾ | 5.0V, 25°C | | | 1M | | | Write Cycles |

Note: 1. This parameter is characterized and is not 100% tested.

4. Functional Description

The AT93C56B/66B is accessed via a simple and versatile three-wire serial communication interface. Device operation is controlled by seven instructions issued by the host processor. A *valid instruction starts with a rising edge of CS* and consists of a start bit (Logic 1) followed by the appropriate opcode and the desired memory address location.

Table 4-1. Instruction Set for the Atmel AT93C56B/66B

| Instruction | SB | Opcode | Address | | Data | | Comments |
|-------------|----|--------|-----------|----------|---------|----------|---|
| | | | x 8 | x 16 | x 8 | x 16 | |
| Read | 1 | 10 | A8 – A0 | A7 – A0 | | | Reads data stored in memory, at specified address. |
| EWEN | 1 | 00 | 11XXXXXXX | 11XXXXXX | | | Write enable must precede all programming modes. |
| Erase | 1 | 11 | A8 – A0 | A7 – A0 | | | Erase memory location An – A0. |
| Write | 1 | 01 | A8 – A0 | A7 – A0 | D7 – D0 | D15 – D0 | Writes memory location An – A0. |
| ERAL | 1 | 00 | 10XXXXXXX | 10XXXXXX | | | Erases all memory locations. Valid only at $V_{CC} = 4.5V$ to $5.5V$. |
| WRAL | 1 | 00 | 01XXXXXXX | 01XXXXXX | D7 – D0 | D15 – D0 | Writes all memory locations. Valid only at $V_{CC} = 5.0V \pm 10\%$ and Disable Register cleared. |
| EWDS | 1 | 00 | 00XXXXXXX | 00XXXXXX | | | Disables all programming instructions. |

Note: The X's in the address field represent *don't care* values and must be clocked.

Read: The Read instruction contains the address code for the memory location to be read. After the instruction and address are decoded, data from the selected memory location is available at the serial output pin DO. Output data changes are synchronized with the rising edges of serial clock SK. It should be noted that a dummy bit (Logic 0) precedes the 8- or 16-bit data output string. The AT93C56B/66B supports sequential read operations. The device will automatically increment the internal address pointer and clock out the next memory location as long as Chip Select (CS) is held high. In this case, the dummy bit (Logic 0) will not be clocked out between memory locations, thus allowing for a continuous stream of data to be read.

Erase/Write Enable (EWEN): To assure data integrity, the part automatically goes into the Erase/Write Disable (EWDS) state when power is first applied. An Erase/Write Enable (EWEN) instruction must be executed first before any programming instructions can be carried out. Please note that once in the EWEN state, programming remains enabled until an EWDS instruction is executed or V_{CC} power is removed from the part.

Erase: The Erase instruction programs all bits in the specified memory location to the Logical 1 state. The self-timed erase cycle starts once the Erase instruction and address are decoded. The DO pin outputs the Ready/Busy status of the part if CS is brought high after being kept low for a minimum of 250ns (t_{CS}). A Logic 1 at pin DO indicates that the selected memory location has been erased, and the part is ready for another instruction.

Write: The Write instruction contains the 8 or 16 bits of data to be written into the specified memory location. The self-timed programming cycle, t_{WP} , starts after the last bit of data is received at serial data input pin DI. The DO pin outputs the Ready/Busy status of the part if CS is brought high after being kept low for a minimum of 250ns (t_{CS}). A Logic 0 at DO indicates that programming is still in progress. A Logic 1 indicates that the memory location at the specified address has been written with the data pattern contained in the instruction and the part is ready for further instructions. A *Ready/Busy status cannot be obtained if the CS is brought high after the end of the self-timed programming cycle, t_{WP} .*


Erase All (ERAL): The Erase All (ERAL) instruction programs every bit in the memory array to the Logic 1 state and is primarily used for testing purposes. The DO pin outputs the ready/busy status of the part if CS is brought high after being kept low for a minimum of 250ns (t_{CS}). The ERAL instruction is valid only at $V_{CC} = 5.0V \pm 10\%$.

Write All (WRAL): The Write All (WRAL) instruction programs all memory locations with the data patterns specified in the instruction. The DO pin outputs the Ready/Busy status of the part if CS is brought high after being kept low for a minimum of 250ns (t_{CS}). The WRAL instruction is valid only at $V_{CC} = 5.0V \pm 10\%$.

Erase/Write Disable (EWDS): To protect against accidental data disturb, the Erase/Write Disable (EWDS) instruction disables all programming modes and should be executed after all programming operations. The operation of the Read instruction is independent of both the EWEN and EWDS instructions and can be executed at any time.

5. Timing Diagrams

Figure 5-1. Synchronous Data Timing

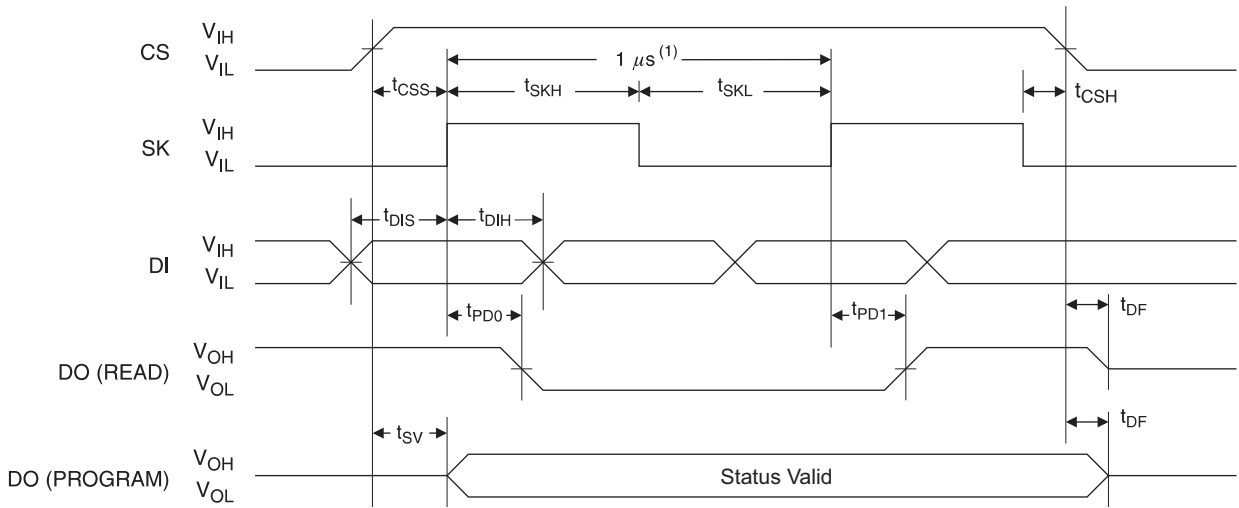

Note: This is the minimum SK period

Table 5-1. Organization Key for Timing Diagrams

| I/O | Atmel AT93C56B (2K) | | Atmel AT93C66B (4K) | |
|-----|---------------------|-------------------|---------------------|------|
| | x 8 | x 16 | x 8 | x 16 |
| AN | A8 ⁽¹⁾ | A7 ⁽²⁾ | A8 | A7 |
| DN | D7 | D15 | D7 | D15 |

Notes: 1. A8 is a *don't care* value, but the extra clock is required.
2. A7 is a *don't care* value, but the extra clock is required.

Figure 5-2. Read Timing

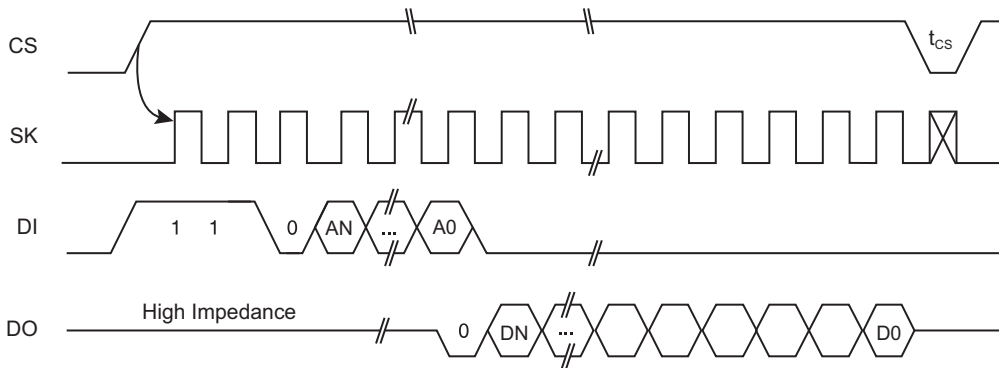


Figure 5-3. EWEN Timing

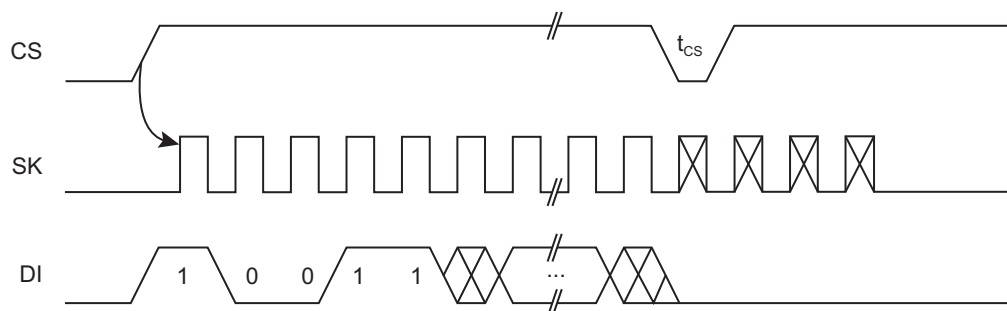


Figure 5-4. EWDS Timing

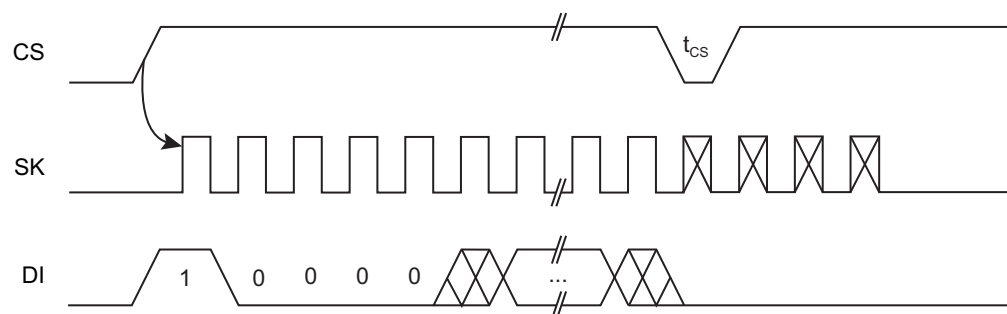


Figure 5-5. Write Timing


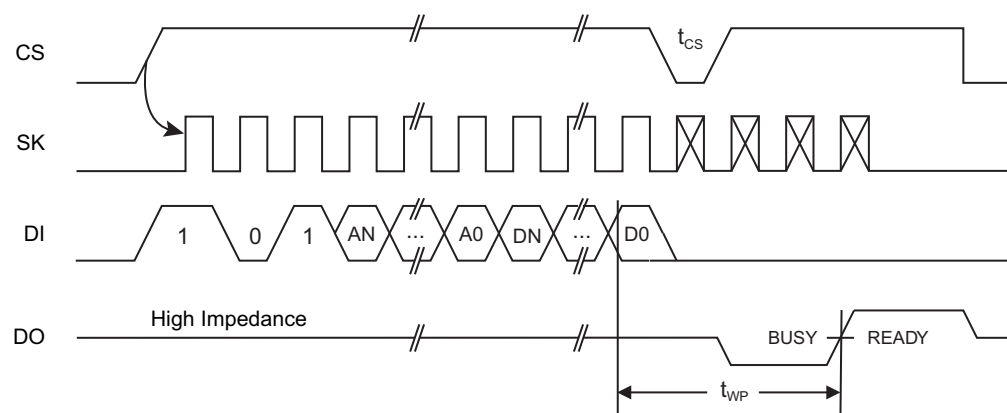


Figure 5-6. WRAL Timing

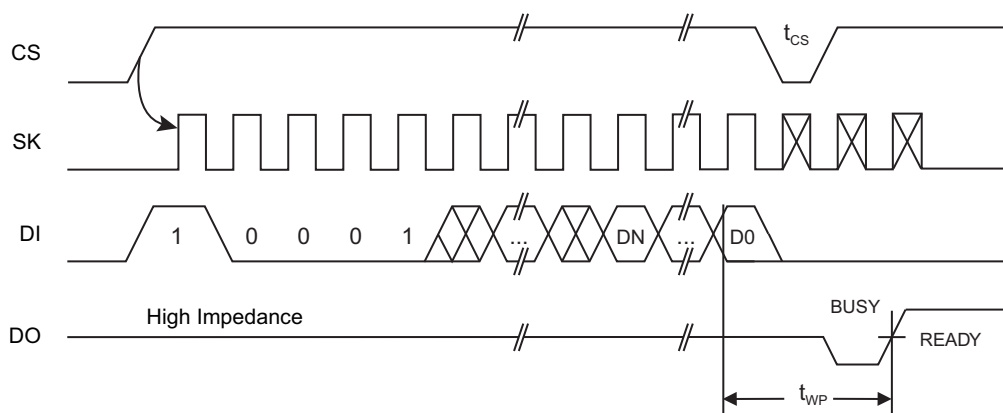

Note: 1. Valid only at $V_{CC} = 4.5V$ to $5.5V$

Figure 5-7. Erase Timing


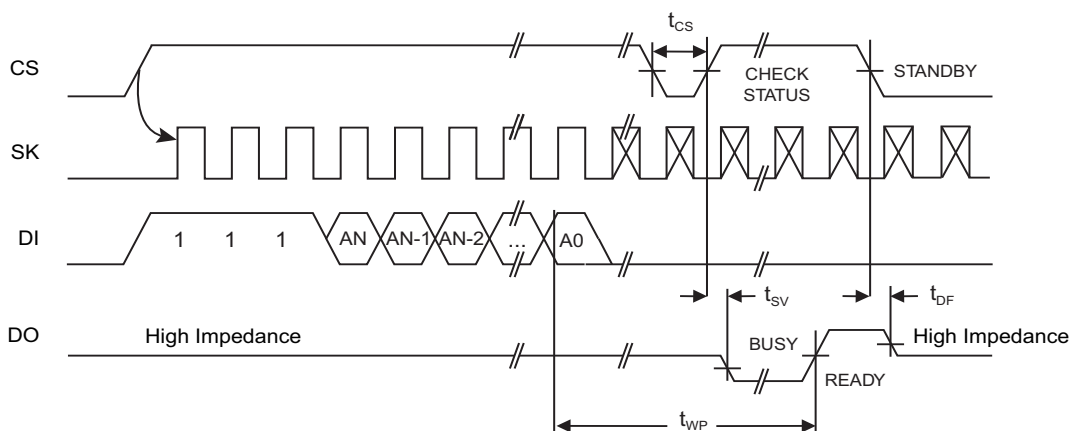


Figure 5-8. ERAL Timing

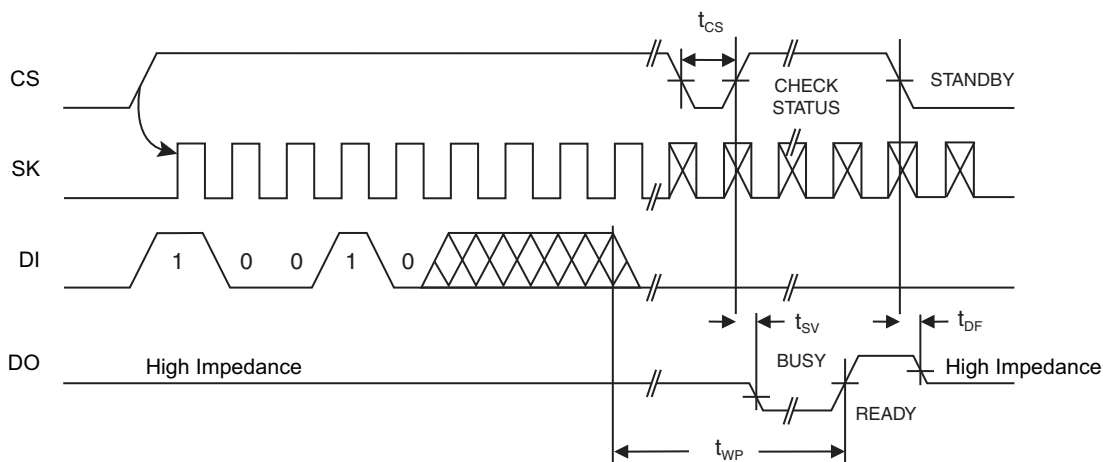


Note: 1. Valid only at $V_{CC} = 4.5V$ to $5.5V$

5.1 Power Recommendation

The device internal POR (power on reset) threshold is just below the minimum device operating voltage. Power shall rise monotonically from 0.0Vdc to full V_{CC} in less than 1ms. Hold at full V_{CC} for at least 100 μ s before the first operation. Power shall drop from full V_{CC} to 0.0Vdc in less than 1ms. Power dropping to a non-zero level and then slowly going to zero is *not* recommended. Power shall remain off (0.0Vdc) for 0.5s minimum. Please consult Atmel if your power conditions do not meet the above recommendations.

6. Product Markings

AT93C56B and AT93C66B: Package Marking Information

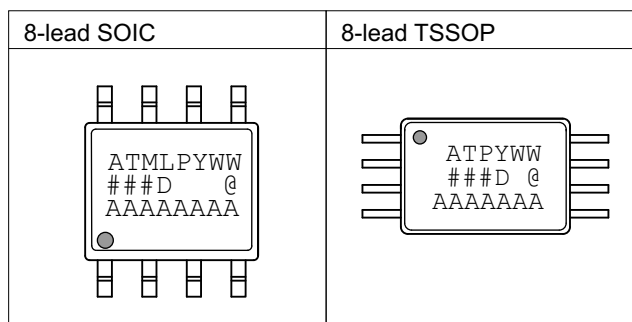

Note 1: ● designates pin 1

Note 2: Package drawings are not to scale

| Catalog Number Truncation | | | |
|--|-----------|----------------------------------|--|
| AT93C56B | | Truncation Code ###: 56B | |
| AT93C66B | | Truncation Code ###: 66B | |
| Date Codes | | | Voltages |
| Y = Year | M = Month | WW = Work Week of Assembly | D: 2.5V min |
| 2: 2012 | 6: 2016 | A: January | |
| 3: 2013 | 7: 2017 | B: February | |
| 4: 2014 | 8: 2018 | ... | |
| 5: 2015 | 9: 2019 | L: December | |
| Country of Assembly | | Lot Number | Grade/Lead Finish Material |
| @ = Country of Assembly | | AAA...A = Atmel Wafer Lot Number | P: Automotive/NiPdAu |
| Trace Code | | | Atmel Truncation |
| XX = Trace Code (Atmel Lot Numbers Correspond to Code) Example: AA, AB.... YZ, ZZ | | | AT: Atmel ATM: Atmel ATML: Atmel |

3/15/12

| | | | | |
|--|---|---|-------------|------|
| | Package Mark Contact: DL-CSO-Assy_eng@atmel.com | TITLE | DRAWING NO. | REV. |
| | | 93C56-66BAM, AT93C56B and AT93C66B Automotive Package Marking Information | 93C56-66BAM | C |

7. Ordering Code Information

7.1 Atmel AT93C56B Ordering Information

| Atmel Ordering Code | Package | Voltage | Operation Range |
|--------------------------------|---------|--------------|--|
| AT93C56B-SSPD | 8S1 | 2.5V to 5.5V | Lead-free/Halogen-free Automotive Temperature (–40°C to 125°C) |
| AT93C56B-SSPD-T ⁽¹⁾ | | | |
| AT93C56B-XPD | 8X | | |
| AT93C56B-XPD-T ⁽¹⁾ | | | |

Note: 1. Tape and reel delivery

- SOIC 4k/reel
- TSSOP 5k/reel

| Package Type | |
|--------------|---|
| 8S1 | 8-lead, 0.150" wide, Plastic Gull Wing Small Outline (JEDEC SOIC) |
| 8X | 8-lead, 4.4mm body, Plastic Thin Shrink Small Outline (TSSOP) |

7.2 Atmel AT93C66B Ordering Information


| Atmel Ordering Code | Package | Voltage | Operation Range |
|--------------------------------|---------|--------------|--|
| AT93C66B-SSPD | 8S1 | 2.5V to 5.5V | Lead-free/Halogen-free Automotive Temperature (–40°C to 125°C) |
| AT93C66B-SSPD-T ⁽¹⁾ | | | |
| AT93C66B-XPD | 8X | | |
| AT93C66B-XPD-T ⁽¹⁾ | | | |

- Note: 1. Tape and reel delivery
- SOIC 4k/reel
 - TSSOP 5k/reel


| Package Type | |
|--------------|---|
| 8S1 | 8-lead, 0.150" wide, Plastic Gull Wing Small Outline (JEDEC SOIC) |
| 8X | 8-lead, 4.4mm body, Plastic Thin Shrink Small Outline (TSSOP) |

8. Packaging Information

8.1 8S1 — 8-lead JEDEC SOIC

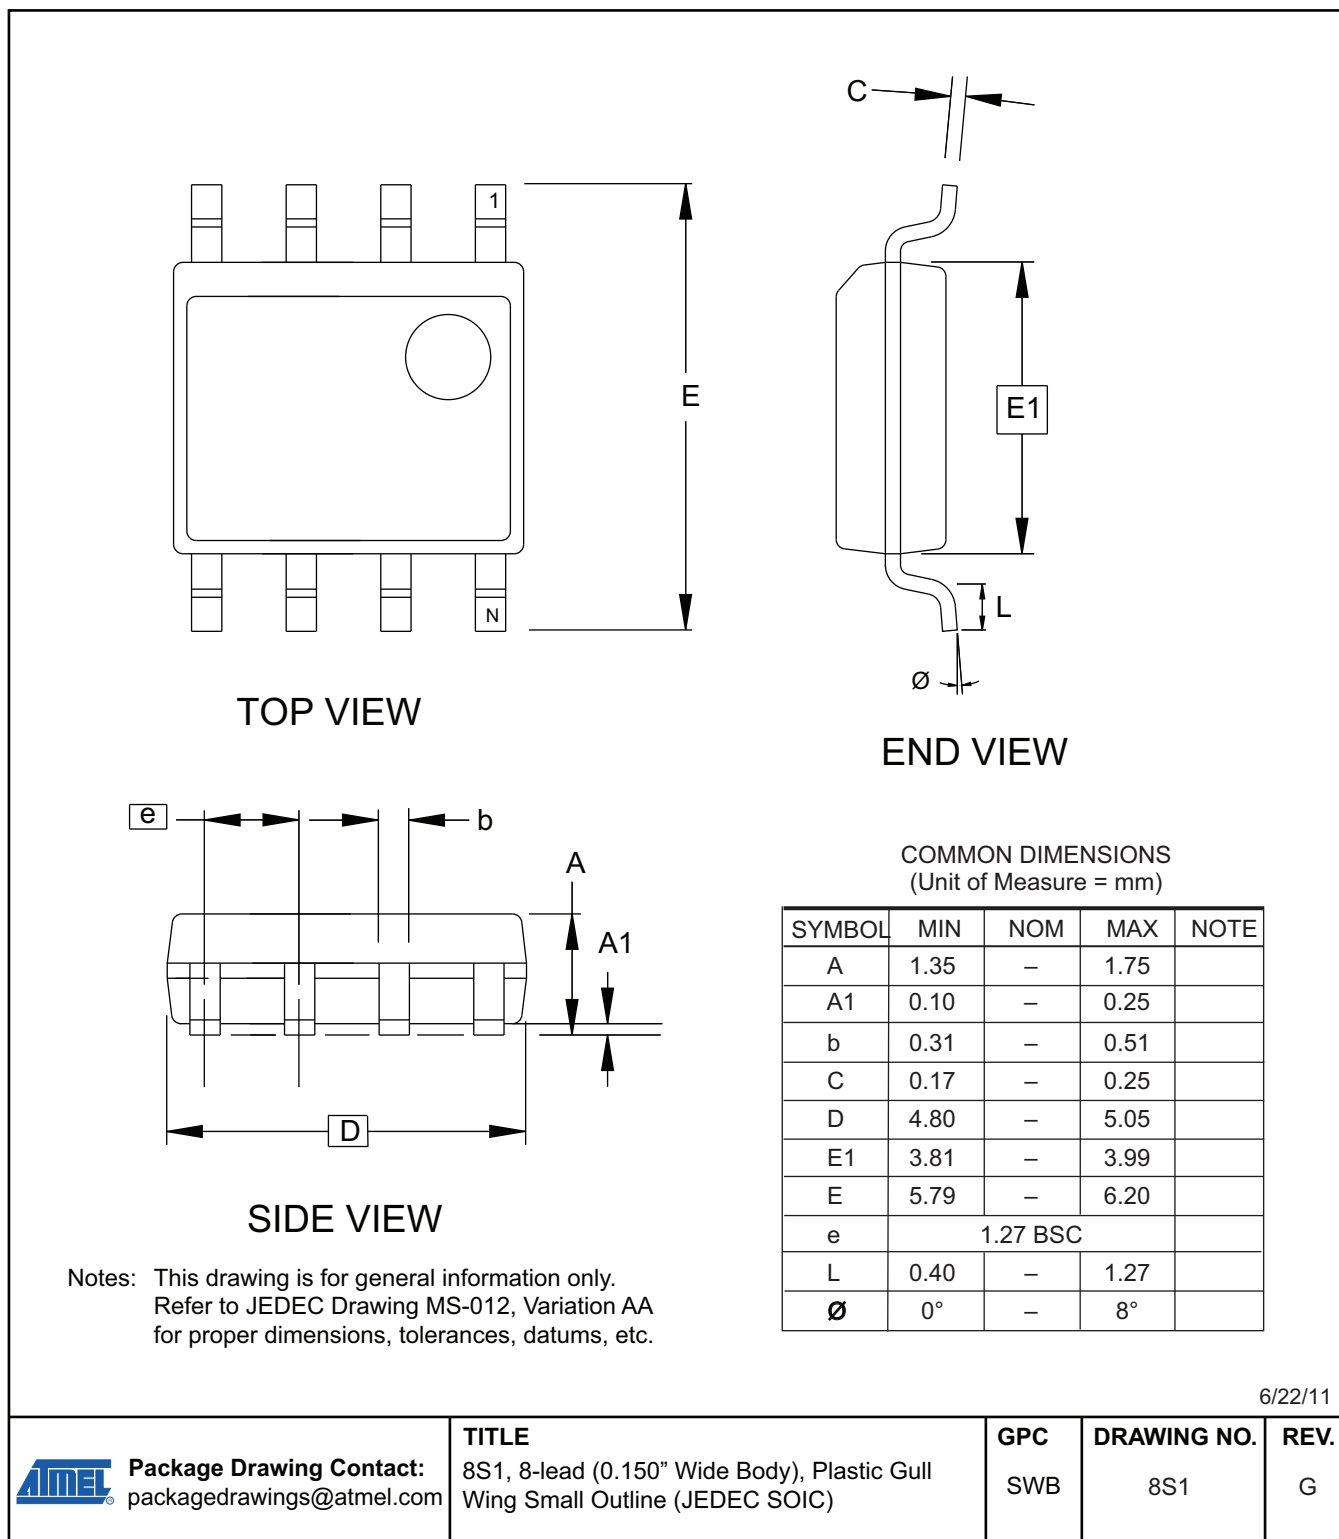

8.2 8X — 8-lead TSSOP

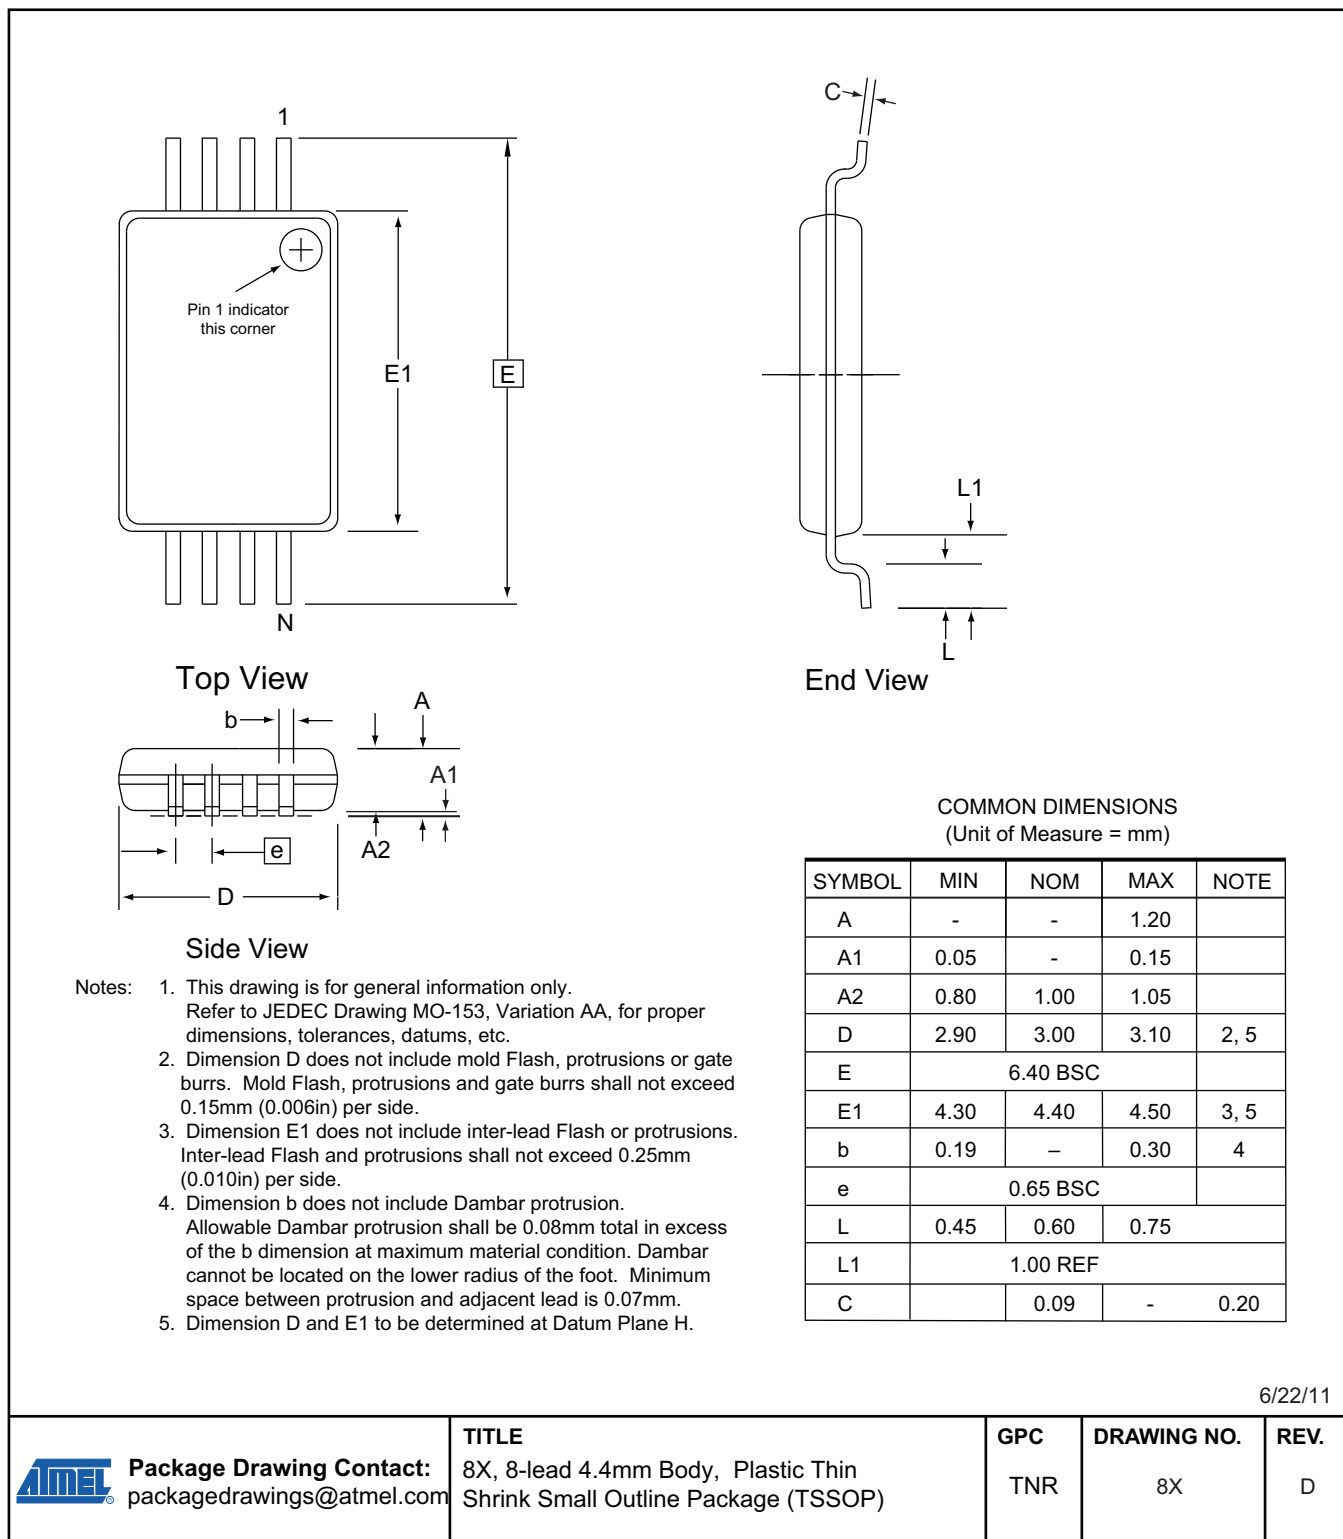

9. Revision History

| Doc. Rev. | Date | Comments |
|-----------|---------|--------------------------|
| 8811A | 06/2012 | Initial document release |



Enabling Unlimited Possibilities®

Atmel Corporation

2325 Orchard Parkway
San Jose, CA 95131
USA

Tel: (+1) (408) 441-0311

Fax: (+1) (408) 487-2600

www.atmel.com

Atmel Asia Limited

Unit 01-5 & 16, 19F
BEA Tower, Millennium City 5
418 Kwun Tong Roa
Kwun Tong, Kowloon
HONG KONG

Tel: (+852) 2245-6100

Fax: (+852) 2722-1369

Atmel Munich GmbH

Business Campus
Parking 4
D-85748 Garching b. Munich
GERMANY

Tel: (+49) 89-31970-0

Fax: (+49) 89-3194621

Atmel Japan G.K.

16F Shin-Osaki Kangyo Bldg
1-6-4 Osaki, Shinagawa-ku
Tokyo 141-0032
JAPAN

Tel: (+81) (3) 6417-0300

Fax: (+81) (3) 6417-0370

© 2012 Atmel Corporation. All rights reserved. / Rev.: 8811A-SEEPR-6/12

Atmel®, Atmel logo and combinations thereof, Enabling Unlimited Possibilities®, and others are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. EXCEPT AS SET FORTH IN THE ATMEL TERMS AND CONDITIONS OF SALES LOCATED ON THE ATMEL WEBSITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS AND PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and products descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.