

Middle Power Class-D Speaker Amplifier series

20W+20W

**Full Digital Speaker Amplifier
with built-in DSP**



BM5480MUV

●General Description

BM5480MUV is a Full Digital Speaker Amplifier with built-in DSP (Digital Sound Processor) designed for Flat-panel TVs in particular for space-saving and low-power consumption, delivers an output power of 20W+20W. This IC employs Bipolar, CMOS, and DMOS (BCD) process technology that eliminates turn-on resistance in the output power stage and internal loss due to line resistances up to an ultimate level. With this technology, the IC can achieve high efficiency. In addition, the IC is packaged in a compact reverse heat radiation type power package to achieve low power consumption and low heat generation and eliminates necessity of external heat-sink up to a total output power of 40W. This product satisfies both needs for drastic downsizing, low-profile structures and many function, high quality playback of sound system.


●Key Specifications

- Supply voltage (VCC) 10V to 26V
- Speaker output power 20W+20W (Typ.)
(VCC=19V,RL=8Ω)
- THD+N 0.07 [%] (Typ.)

●Applications

- Flat Panel TVs (LCD, Plasma)
- Home Audio
- Desktop PC
- Amusement equipments
- Electronic Music equipments, etc.

●Package W(Typ.) x D(Typ.) x H(Max.)
VQFN48V7070P 7.00mm x 7.00mm x 1.00mm

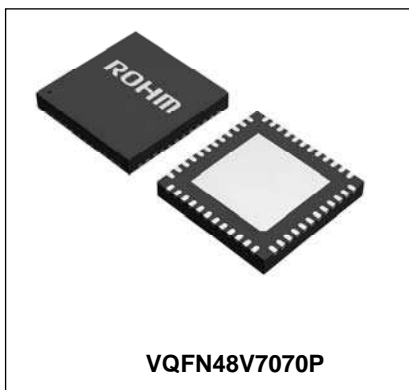

●Features

- This IC includes the DSP (digital sound processor) for Audio signal processing for Flat TVs. P²Bass+(pseudo bass), 16 Band P-EQ, Level DRC, 2 Band DRC, Surround, etc.
- This IC has one input systems of digital audio interface. (No needs of Master Clock)
 - I²S / LJ / RJ format
 - LRCLK: 32k/44.1k/48KHz
 - BCLK: 32fs / 48fs / 64fs
 - SDATA: 16 / 20 / 24bit
- With wide range of power supply voltage.
- The monaural output that can reduce the number of external parts can be used.
- With high efficiency and low heat dissipation contributing to miniaturization, slim design, and also power saving of the system.
- Eliminates pop-noise generated during the power supply on/off. High quality muting performance is realized by using the soft-muting technology.
- This IC is built-in with various protection functions for highly reliability design.
 - High temperature protection
 - Over voltage protection, Under voltage protection
 - Output short protection
 - DC voltage protection
 - Clock stop protection
- Small package

●Typical Application Circuit

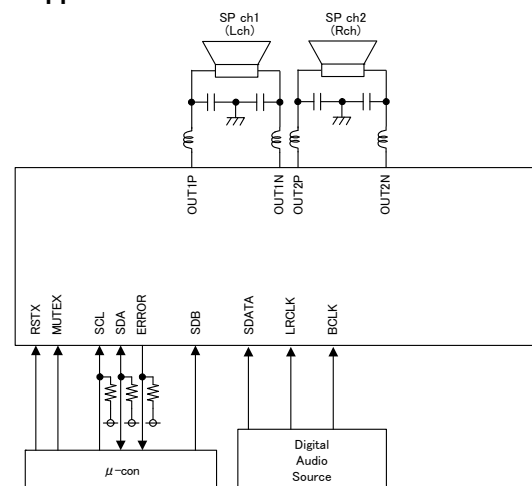


Figure .1 Typical application circuit

○Product structure : Silicon monolithic integrated circuit ○This product is not designed protection against radiation.

●Pin configuration and Block diagram

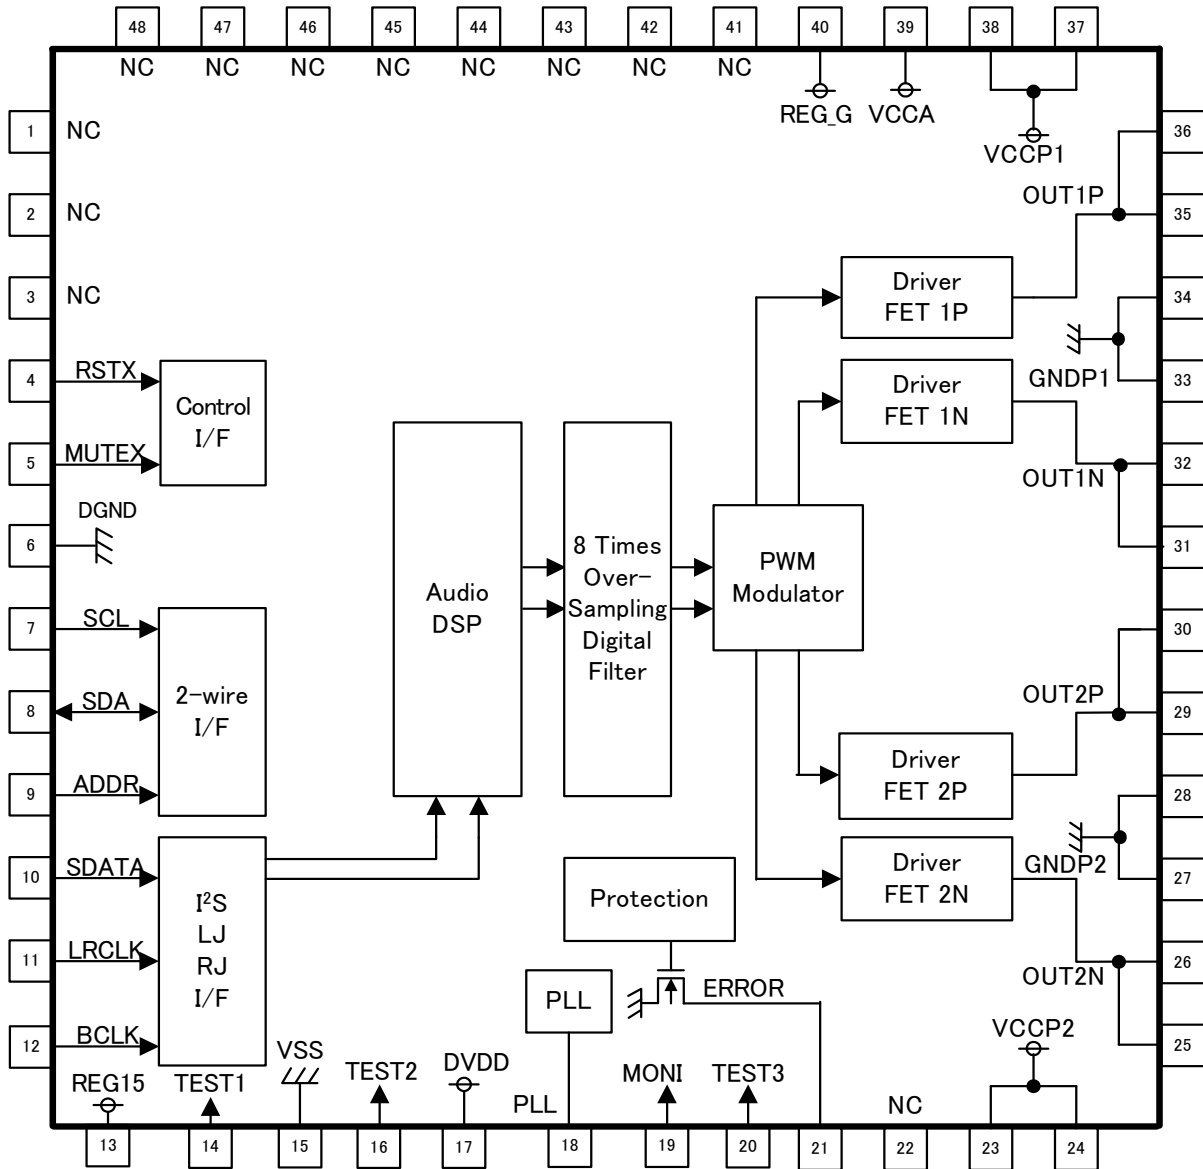


Figure .2 Pin configuration and Block diagram (Top View)

●Pin Description

No.	Name	I/O	No.	Name	I/O	No.	Name	I/O	No.	Name	I/O
1	NC	-	13	REG15	O	25	OUT2N	O	37	VCCP1	-
2	NC	-	14	TEST1	I	26	OUT2N	O	38	VCCP1	-
3	NC	-	15	VSS	-	27	GNDP2	-	39	VCCA	-
4	RSTX	I	16	TEST2	O	28	GNDP2	-	40	REG_G	O
5	MUTEX	I	17	DVDD	-	29	OUT2P	O	41	NC	-
6	DGND	-	18	PLL	O	30	OUT2P	O	42	NC	-
7	SCL	I	19	MONI	I/O	31	OUT1N	O	43	NC	-
8	SDA	I/O	20	TEST3	I	32	OUT1N	O	44	NC	-
9	ADDR	I	21	ERROR	O	33	GNDP1	-	45	NC	-
10	SDATA	I	22	NC	-	34	GNDP1	-	46	NC	-
11	LRCLK	I	23	VCCP2	-	35	OUT1P	O	47	NC	-
12	BCLK	I	24	VCCP2	-	36	OUT1P	O	48	NC	-

●Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Limit	Unit	Conditions	
Supply voltage	VCC	-0.3 to 30	V	Pin 23,24,37,38, 39	*1 *2
	DVDD	-0.3 to 4.5	V	Pin 17	*1
Power dissipation	Pd	4.30	W		*3
		4.80	W		*4
Input voltage 1	VIN1	-0.3 to DVDD+0.3	V	Pin 4, 5, 7 - 12, 14, 16, 19, 20, 21	*1
Terminal voltage 1	VPIN1	-0.3 to 7.0	V	Pin 40	*1
Terminal voltage 2	VPIN2	-0.3 to 30	V	Pin 25, 26, 29, 30, 31, 32, 35, 36	*1*6
Operating temperature range	Topr	-25 to +85	°C		
Storage temperature range	Tstg	-55 to +150	°C		
Maximum junction temperature	Tjmax	+150	°C		


*1 The voltage that can be applied reference to GND (Pin 1, 6, 15, 27, 28, 33, 34).

*2 Do not, however exceed Pd and Tjmax=150°C.

*3 74.2mm × 74.2mm × 1.6mm, FR4, 4-layer glass epoxy board (Copper area 34.09mm²)
Derating in done at 34.4 mW/°C for operating above Ta=25°C. There are thermal via on the board.

*4 74.2mm × 74.2mm × 1.6mm, FR4, 4-layer glass epoxy board (Copper area 5505mm²)
Derating in done at 38.4 mW/°C for operating above Ta=25°C. There are thermal via on the board.

*6 It should use it below this ratings limit including the AC peak waveform (overshoot) for all conditions.
At only undershoot, it is admitted using at ≤10nsec and ≤30V by the VCC reference. (Please refer following figure.)

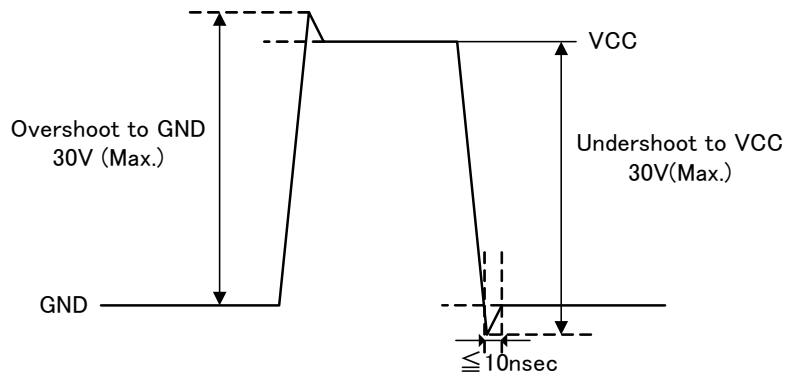

●Recommended Operating Ratings (Ta=25°C)

Item	Symbol	Limit	Unit	Conditions	
Supply voltage	VCC	10 to 26	V	Pin 23,24,37,38, 39	*1 *2
	DVDD	3 to 3.6	V	Pin 16	*1
Minimum load impedance 1	RL1	5.4	Ω	Pin 25, 26, 29, 30, 31, 32, 35, 36 VCC = 18V to 26V	*7
		3.6	Ω	Pin 25, 26, 29, 30, 31, 32, 35, 36 VCC < 18V	*7

*7 Do not, however exceed Pd.

●Electrical Characteristics

(Unless otherwise specified Ta=25°C, VCC=18V, DVDD=3.3V, RSTX=3.3V, MUTEX=3.3V, f=1kHz,
 RL1=8Ω, DSP : Through, fs=48kHz, MCLK=256fs,
 Snubber circuit for output terminal: R=5.6Ω, C=1200pF)

Item	Symbol	Limit			Unit	Conditions
		Min	Typ	Max		
Total circuit						
Circuit current 1 (Normal mode)	I _{CC1}	-	45	90	mA	Pin 23,24,37,38,39, No load
	I _{DD1}	-	20	40	mA	Pin 17, -∞dBFS input, No load
Circuit current 2 (Reset mode)	I _{CC2}	-	100	200	μA	Pin 23,24,37,38,39, No load RSTX=0V, MUTEX=0V, SDB=0V
	I _{DD2}	-	2.5	7.0	mA	Pin 17, -∞dBFS input, No load RSTX=0V, MUTEX=0V, SDB=0V
Open-drain terminal Low level voltage	V _{ERR}	-	-	0.8	V	Pin 21, I _o =0.5mA
Regulator output voltage 1	V _{REG_G}	4.7	5.5	6.3	V	Pin 40
Regulator output voltage 2	V _{REG15}	1.3	1.5	1.7	V	Pin 13
High level input voltage	V _{IH}	2.5	-	3.3	V	Pin 4, 5, 7 - 12, 14, 16, 19, 20, 41
Low level input voltage	V _{IL}	0	-	0.8	V	Pin 4, 5, 7 - 12, 14, 16, 19, 20, 41
Input current (Input pull-up terminal)	I _{UP}	-150	-100	-50	μA	Pin 10 - 12, 19, VIN = 0V
Input current (Input pull-down terminal)	I _{DN}	35	70	105	μA	Pin 4, 5, 9, VIN = 3.3V
Input current (SCL, SDA terminal)	I _{IL}	-1	0	-	μA	Pin 7, 8, VIN = 0V
Input current (SCL, SDA terminal)	I _{IH}	-	0	1	μA	Pin 7, 8, VIN = 3.3V
Speaker amplifier output						
Maximum output power 1	P _{O1}	-	10	-	W	VCC=13.5V, THD+n=10% *8
Maximum output power 2	P _{O2}	-	20	-	W	VCC=19V, THD+n=10% *8
Total harmonic distortion 1	THD1	-	0.07	-	%	P _o =1W, BW=20 to 20kHz(AES17) *8
Crosstalk 1	CT1	60	80	-	dB	VCC=13.5V, P _o =1W, BW=IHF-A *8
Output noise voltage 1	V _{NO1}	-	80	-	μVrms	-∞dBFS input, BW=IHF-A *8
PWM sampling frequency	f _{PWM1}	-	256	-	kHz	fs=32 kHz *8
	f _{PWM2}	-	352.8	-	kHz	fs=44.1 kHz *8
	f _{PWM3}	-	384	-	kHz	fs=48 kHz *8

*8 These items show the typical performance of device and depend on board layout, parts, and power supply.
 The standard value is in mounting device and parts on surface of ROHM's board directly.

● **Typical Performance Curves** Speaker output (Ta=25°C, VCC=18V, DVDD=3.3V, RSTX=0V/3.3V, MUTEX=0V/3.3V, f=1kHz, DSP : Through, fs=48kHz, MCLK=256fs, Snubber circuit for output terminal : [8Ω] R=5.6Ω, C=1200pF, [6,4Ω] R=5.6Ω, C=3300pF) Measured by ROHM designed 4 layer board.

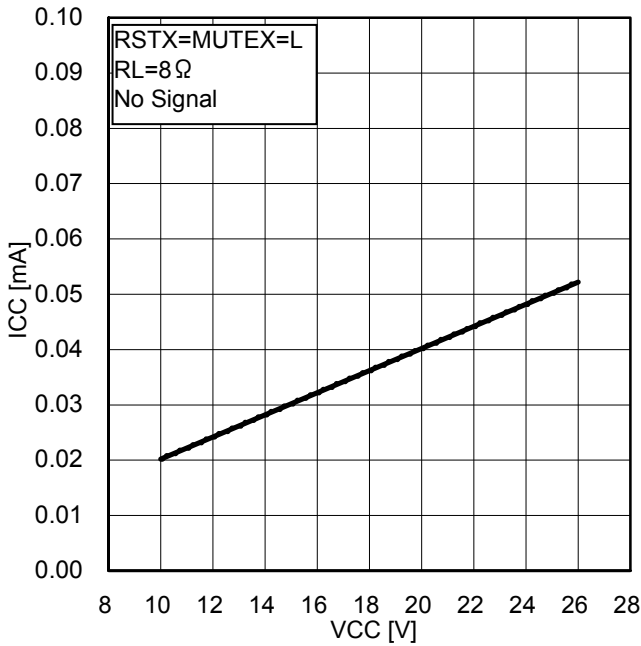


Figure .3

Power supply voltage- Current consumption

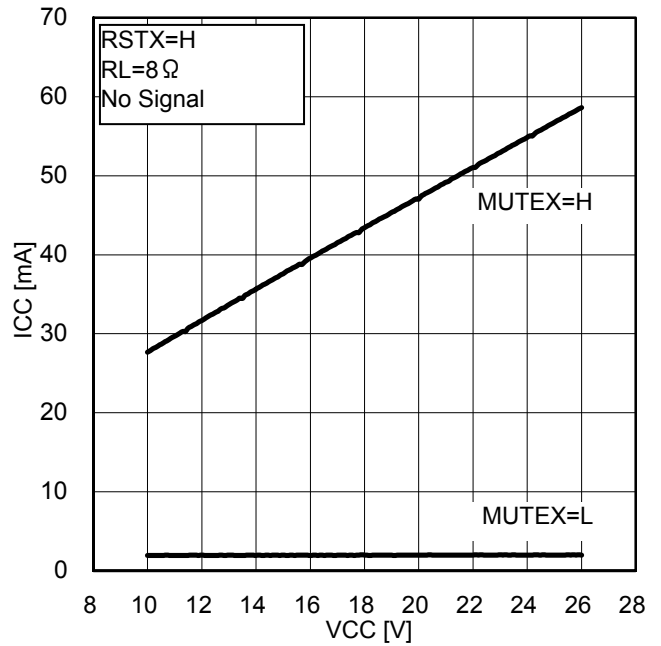


Figure .4

Power supply voltage- Current consumption

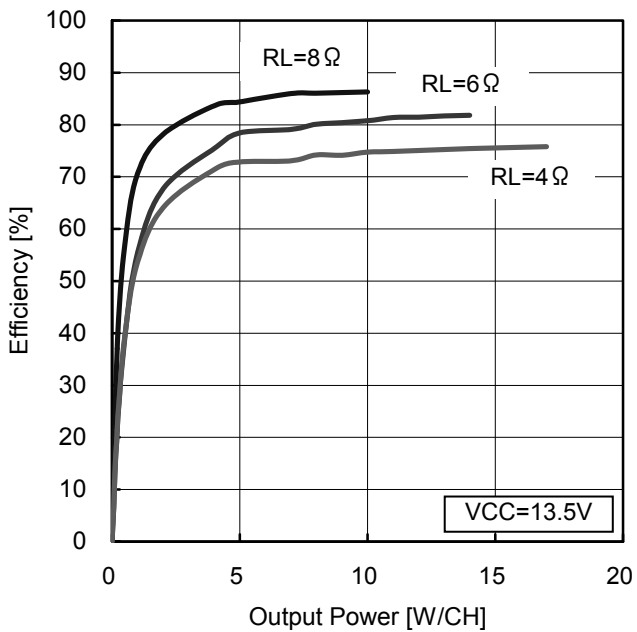


Figure .5

Output power - Efficiency

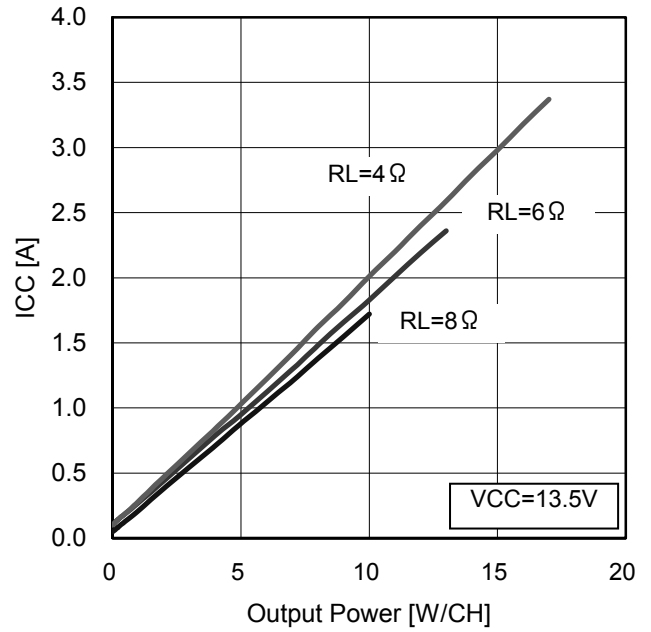


Figure .6

Output power - Current consumption

● **Typical Performance Curves** Speaker output (Ta=25°C, VCC=18V, DVDD=3.3V, RSTX=0V/3.3V, MUTEX=0V/3.3V, f=1kHz, DSP : Through, fs=48kHz, MCLK=256fs, Snubber circuit for output terminal : [8Ω] R=5.6Ω, C=1200pF, [6,4Ω] R=5.6Ω, C=3300pF) Measured by ROHM designed 4 layer board.

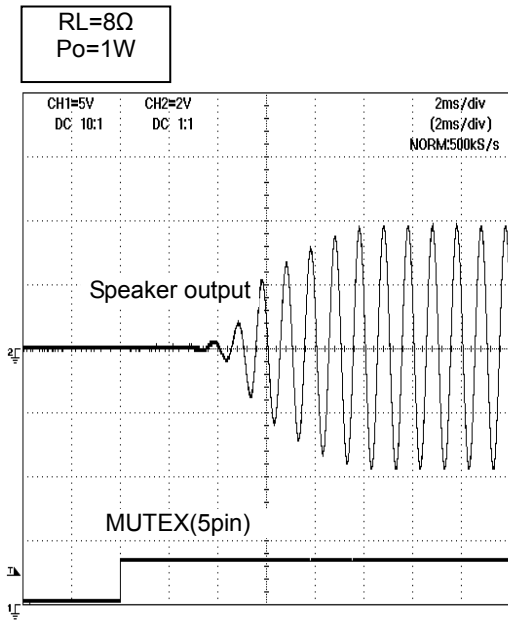


Figure .7
Waveform at soft start

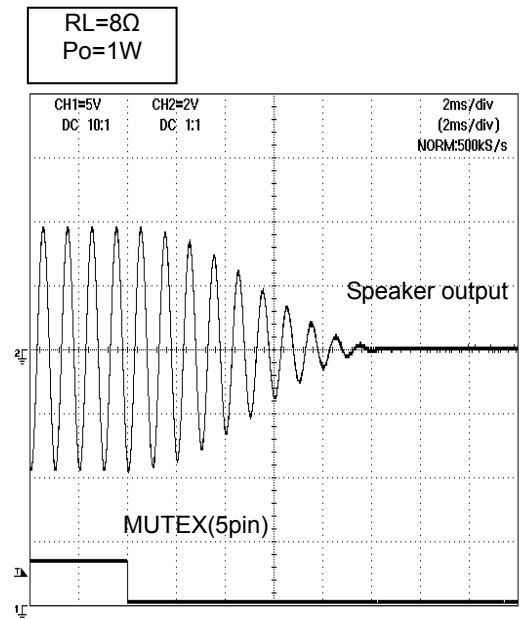


Figure .8
Waveform at soft mute

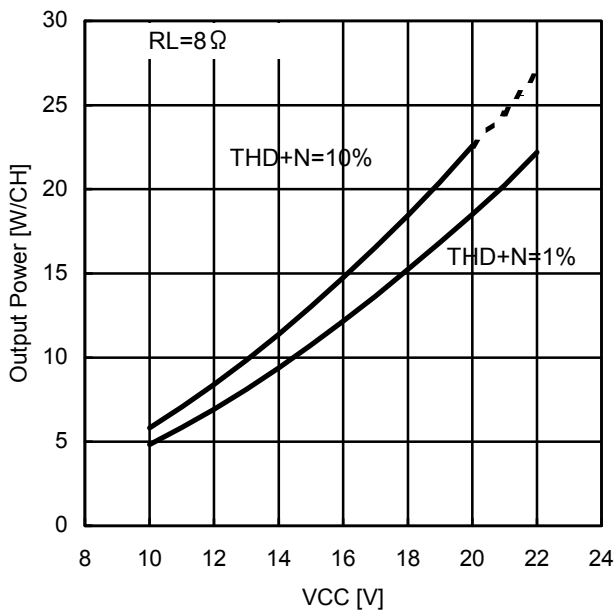


Figure .9
Output voltage - Power voltage (RL1=8Ω)

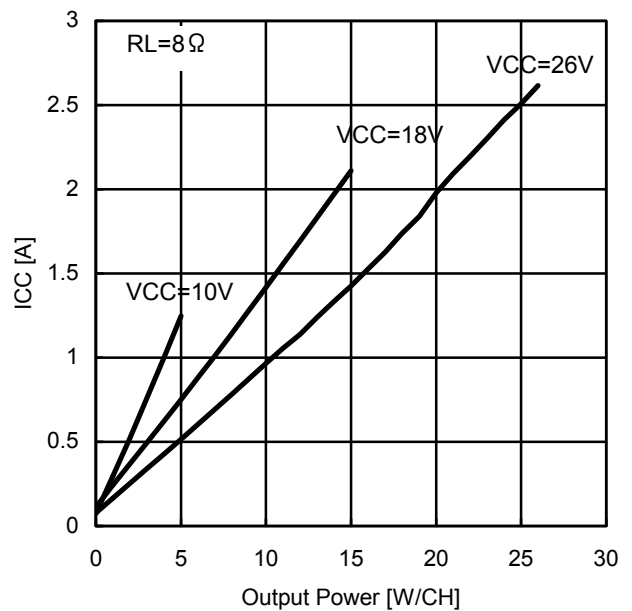


Figure .10
Output power - Current consumption (RL1=8Ω)

※Dotted line means internal dissipation is over package power.

● **Typical Performance Curves** Speaker output (Ta=25°C, VCC=18V, DVDD=3.3V, RSTX=0V/3.3V, MUTEX=0V/3.3V, f=1kHz, DSP : Through, fs=48kHz, MCLK=256fs, Snubber circuit for output terminal : [8 Ω] R=5.6 Ω, C=1200pF, [6,4 Ω] R=5.6 Ω, C=3300pF) Measured by ROHM designed 4 layer board.

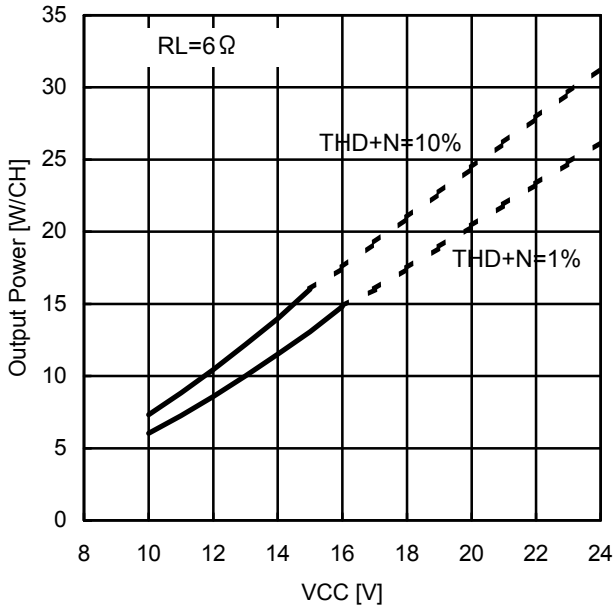


Figure .11

Output voltage - Power voltage (RL1=6Ω)

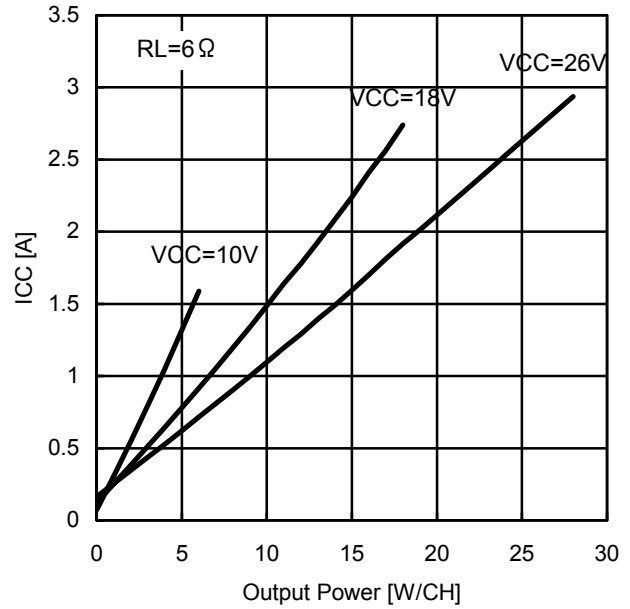


Figure .12

Output power - Current consumption (RL1=6Ω)

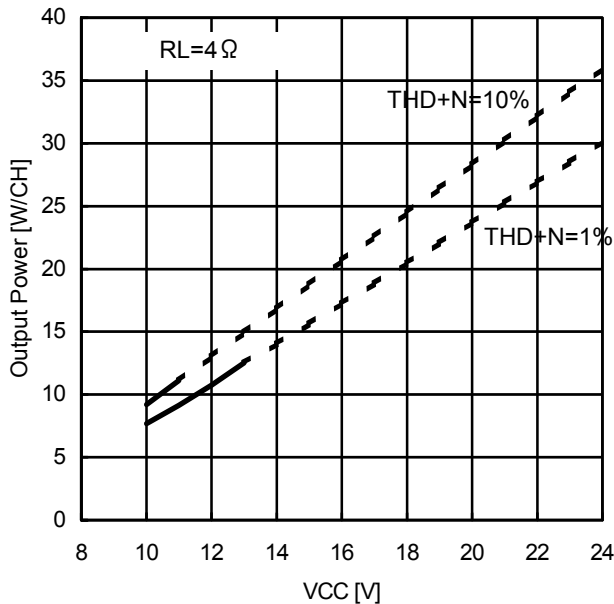


Figure .13

Output Voltage – Power Voltage (RL1=4Ω)

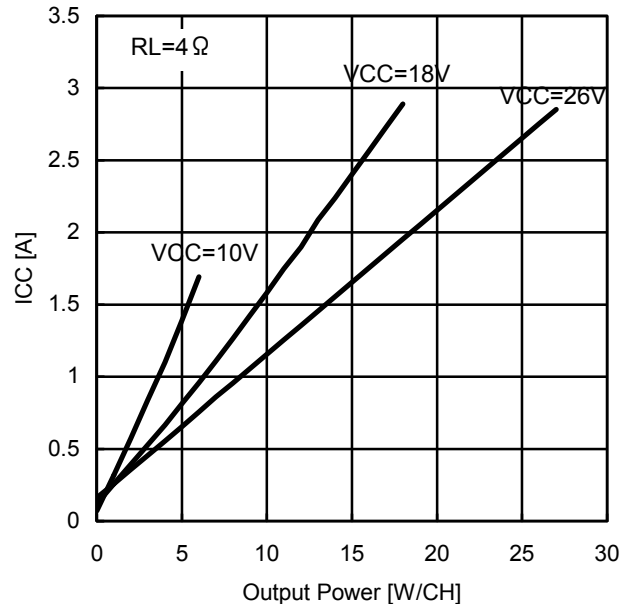


Figure .14

Output power - Current consumption (RL1=4Ω)

※Dotted line means internal dissipation is over package power.

● **Typical Performance Curves** Speaker output ($R_{L1}=8\Omega$, $T_a=25^\circ\text{C}$, $V_{CC}=18\text{V}$, $DVDD=3.3\text{V}$, $RSTX=3.3\text{V}$, $MUTEX=3.3\text{V}$, $f=1\text{kHz}$,
 DSP : Through, $f_s=48\text{kHz}$, $MCLK=256\text{fs}$, Snubber circuit for output terminal : $R=5.6\Omega$, $C=1200\text{pF}$)
 Measured by ROHM designed 4 layer board.

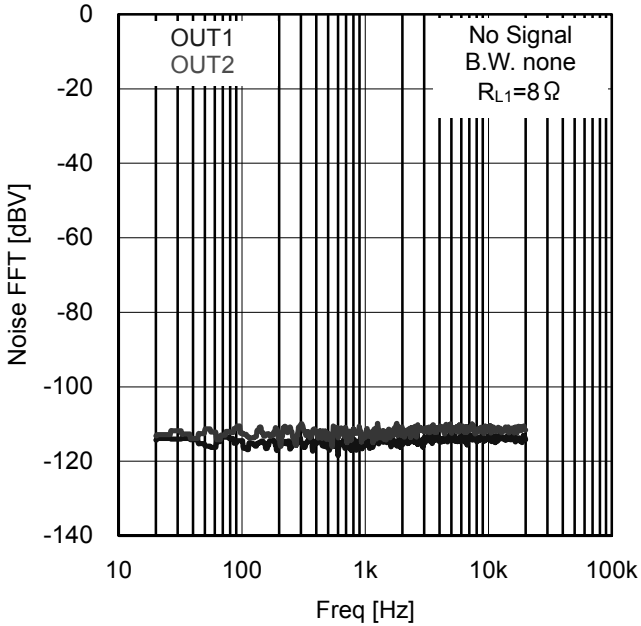


Figure .15
 FFT of output noise voltage

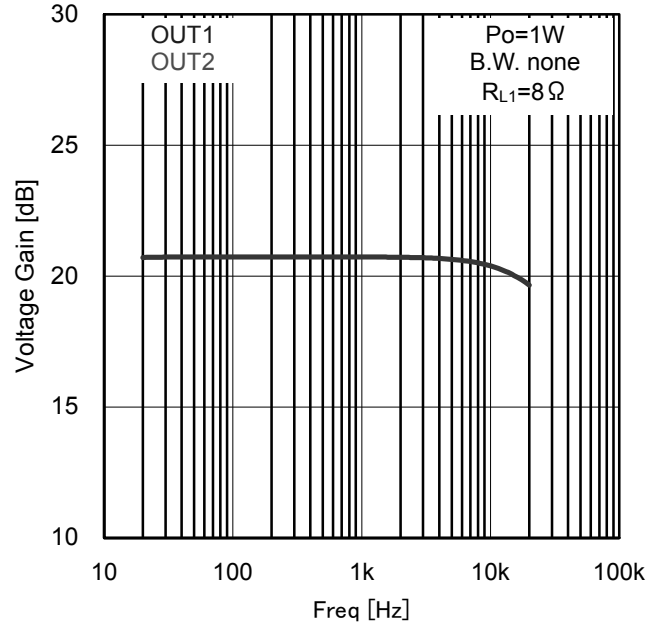


Figure .16
 Frequency - Output power

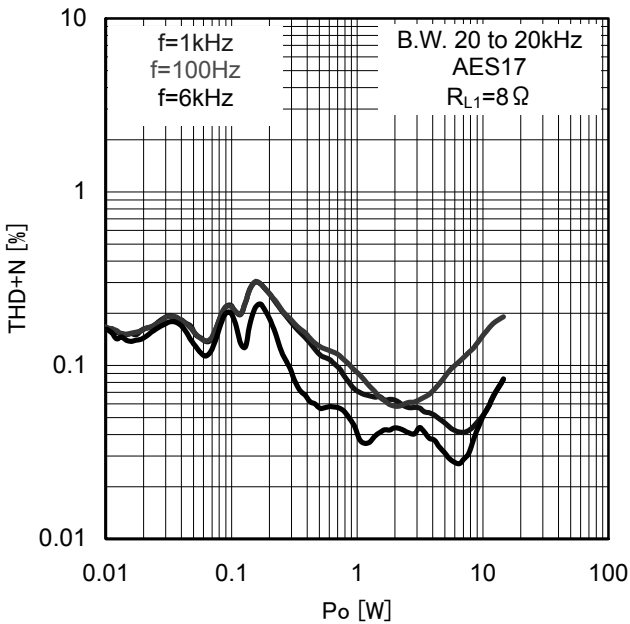


Figure .17
 Output Power - THD+N

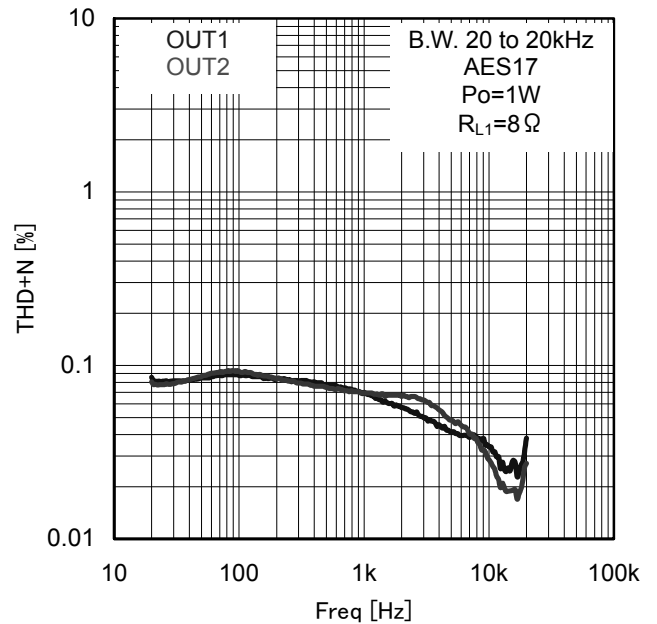


Figure .18
 Frequency - THD+N

● **Typical Performance Curves** Speaker output ($R_{L1}=8\Omega$, $T_a=25^\circ\text{C}$, $V_{CC}=18\text{V}$, $DV_{DD}=3.3\text{V}$, $R_{STX}=3.3\text{V}$, $MUTEX=3.3\text{V}$, $f=1\text{kHz}$,
DSP : Through, $f_s=48\text{kHz}$, $MCLK=256\text{fs}$, Snubber circuit for output terminal : $R=5.6\Omega$, $C=1200\text{pF}$)
Measured by ROHM designed 4 layer board.

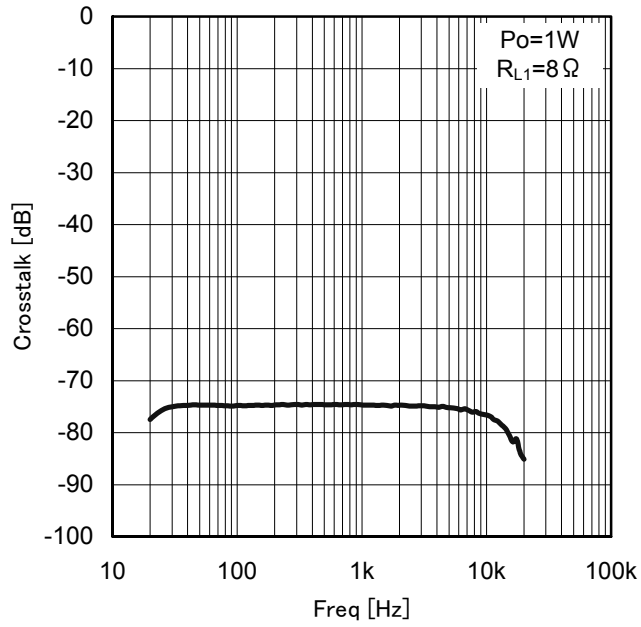


Figure .19
Frequency - Crosstalk

● **Typical Performance Curves** Speaker output ($R_{L1}=6\Omega$, $T_a=25^\circ\text{C}$, $V_{CC}=18\text{V}$, $SVDD=3.3\text{V}$, $R_{STX}=3.3\text{V}$, $MUTEX=3.3\text{V}$, $f=1\text{kHz}$,
 DSP : Through, $f_s=48\text{kHz}$, $MCLK=256\text{fs}$, Snubber circuit for output terminal : $R=5.6\Omega$, $C=3300\text{pF}$)
 Measured by ROHM designed 4 layer board.

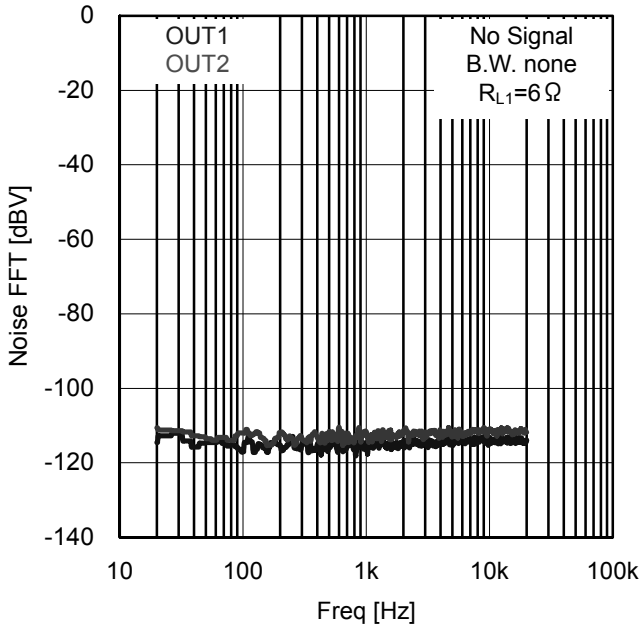


Figure .20
 FFT of output noise voltage

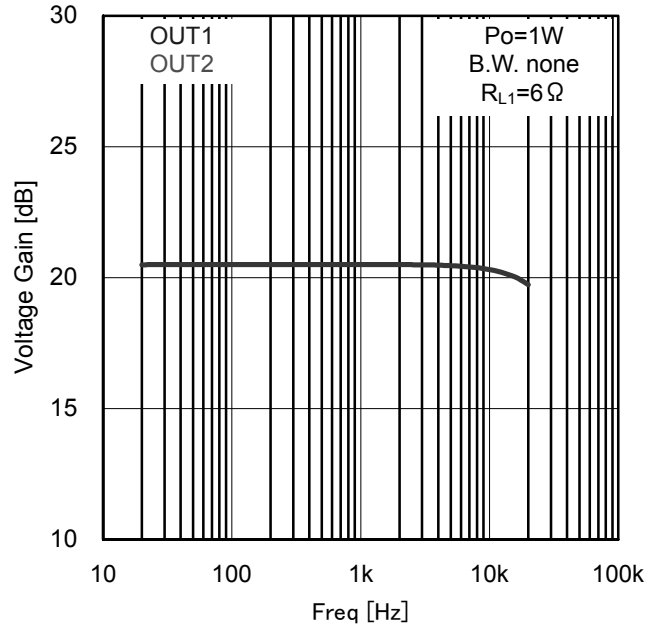


Figure .21
 Frequency - Output power

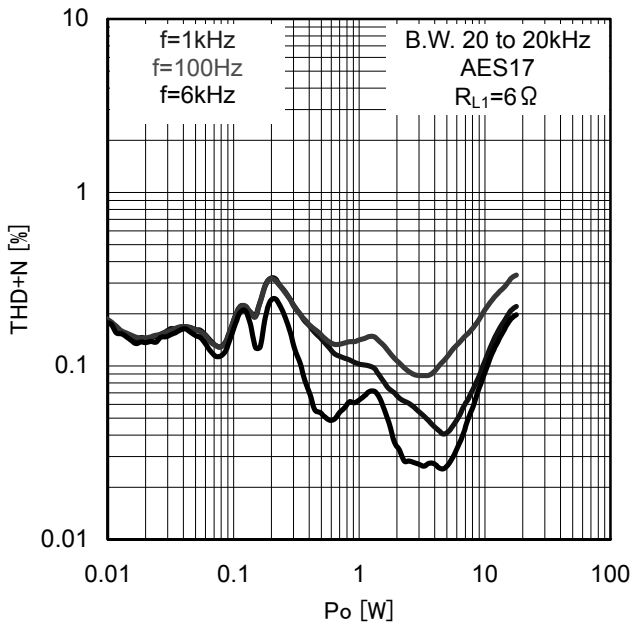


Figure .22
 Output Power - THD+N

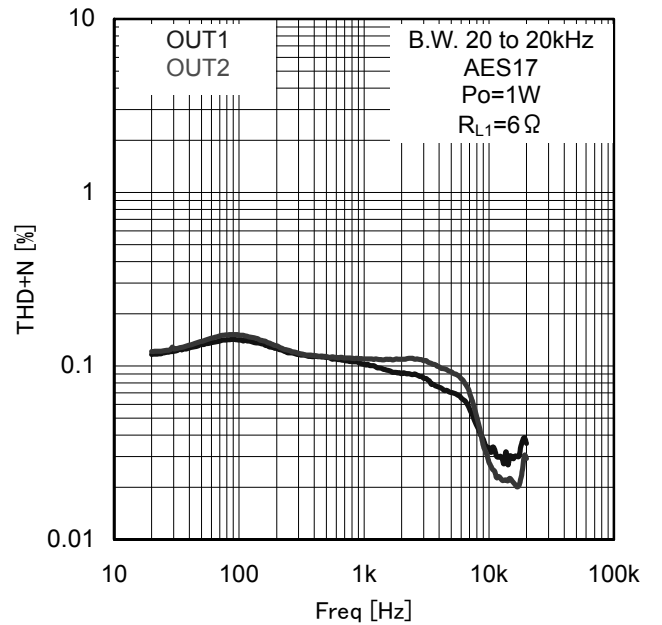


Figure .23
 Frequency - THD+N

● **Typical Performance Curves** Speaker output ($R_{L1}=6\Omega$, $T_a=25^\circ\text{C}$, $V_{CC}=18\text{V}$, $SV_{DD}=3.3\text{V}$, $R_{STX}=3.3\Omega$, $MUTEX=3.3\text{V}$, $f=1\text{kHz}$,
 DSP : Through, $f_s=48\text{kHz}$, $MCLK=256\text{fs}$, Snubber circuit for output terminal : $R=5.6\Omega$, $C=3300\text{pF}$)
 Measured by ROHM designed 4 layer board.

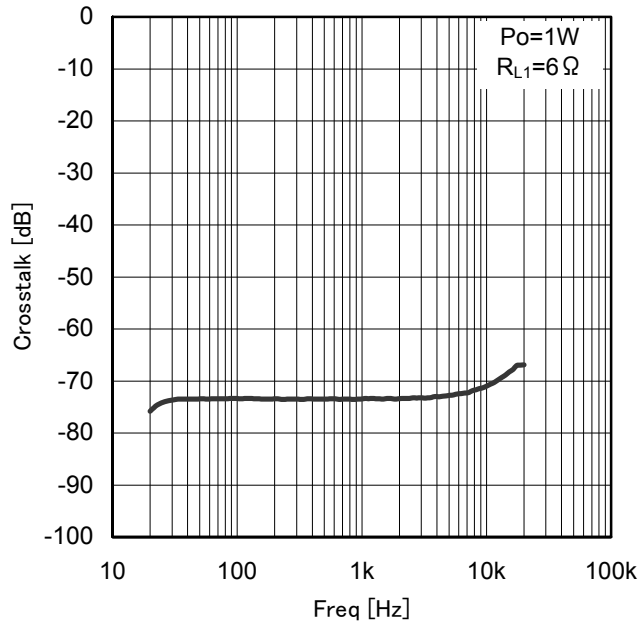


Figure .24
 Frequency - Crosstalk

● **Typical Performance Curves** Speaker output ($R_{L1}=4\Omega$, $T_a=25^\circ\text{C}$, $V_{CC}=18\text{V}$, $DV_{DD}=3.3\text{V}$, $R_{STX}=3.3\text{V}$, $MUTEX=3.3\text{V}$, $f=1\text{kHz}$,
 DSP : Through, $f_s=48\text{kHz}$, $MCLK=256\text{fs}$, Snubber circuit for output terminal : $R=5.6\Omega$, $C=3300\text{pF}$)
 Measured by ROHM designed 4 layer board.

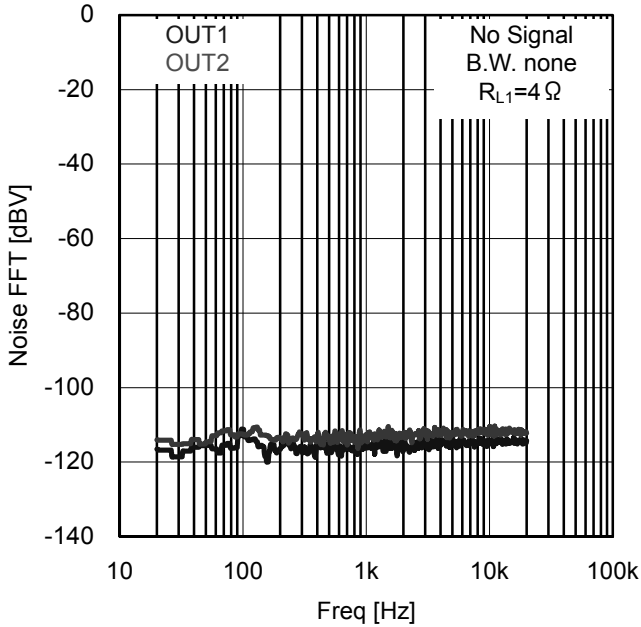


Figure .25
 FFT of output noise voltage

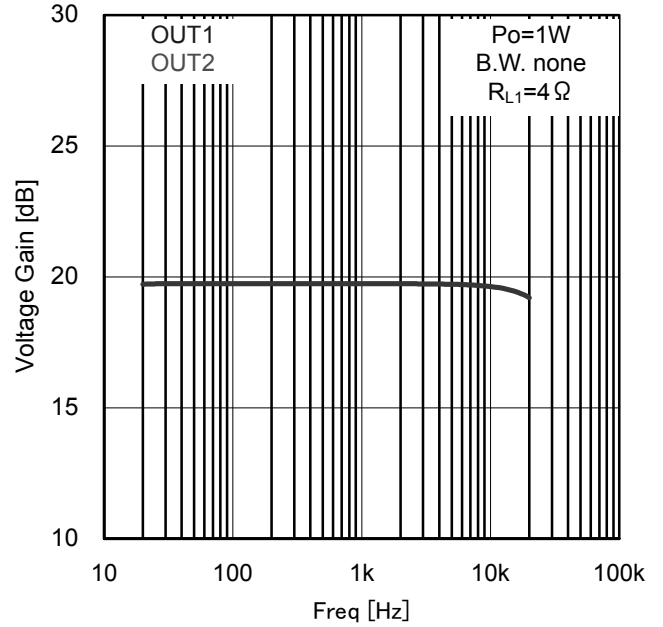


Figure .26
 Frequency - Output power

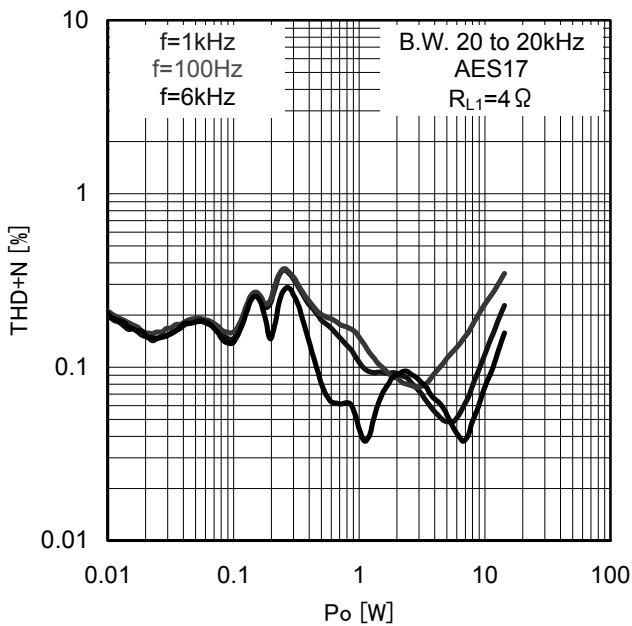


Figure .27
 Output Power - THD+N

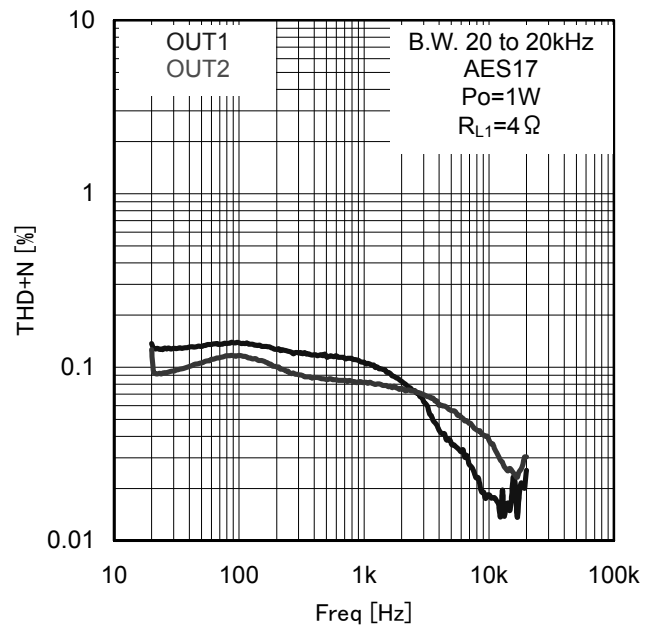


Figure .28
 Frequency - THD+N

● **Typical Performance Curves** Speaker output ($R_{L1}=4\Omega$, $T_a=25^\circ\text{C}$, $V_{CC}=18\text{V}$, $DV_{DD}=3.3\text{V}$, $R_{STX}=3.3\text{V}$, $MUTEX=3.3\text{V}$, $f=1\text{kHz}$,
 DSP : Through, $f_s=48\text{kHz}$, $MCLK=256\text{fs}$, Snubber circuit for output terminal : $R=5.6\Omega$, $C=3300\text{pF}$)
 Measured by ROHM designed 4 layer board.

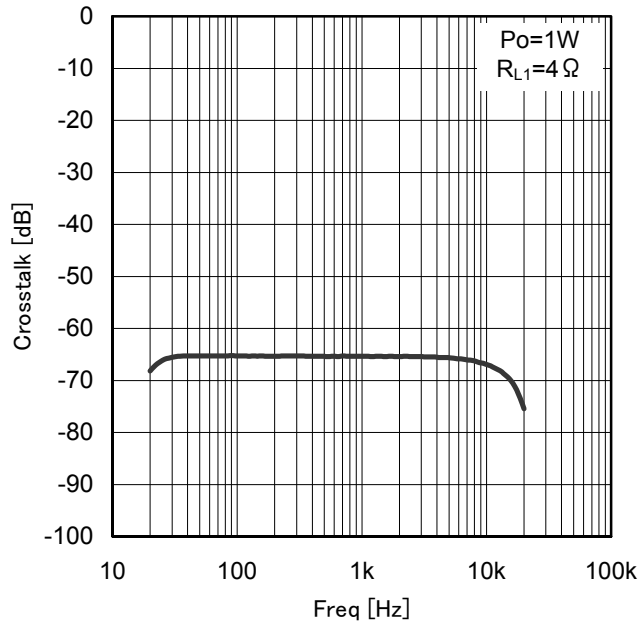


Figure .29
 Frequency - Crosstalk

●Digital Block Functional Overview

No.	Function	Feature
1	DC cut HPF	<ul style="list-style-type: none"> • 1st order HPF • Fc : 1Hz
2	Pre-scaler	<ul style="list-style-type: none"> • Lch / Rch become same set point. • +48dB to -79dB (0.5dB step)、-∞dB • default 0dB
3	Channel Mixer	<ul style="list-style-type: none"> • Lch <= Mute, Lch(default), Rch, (L+R)/2, L-R • Rch <= Mute, Lch, Rch(default), (L+R)/2, L-R • Lch/Rch are independent phase reversal control available.
4	LEVEL DRC	<ul style="list-style-type: none"> • When the small signal is detected continuously during the fixed time, this function is soft mute transition. • There is soft transition function. • LEVEL DRC Detect level : -30dB to -96dB, 12step • Soft MUTE transition time : 0.125sec to 8sec, 16step • MUTE release time : 1msec to 40msec, 8step
5	Surround	<ul style="list-style-type: none"> • Emphasizes the stereo. • There is a pseudo-stereo effect. (Add a stereo to mono sound)
6	P ² Bass+ (Perfect Pure Bass+)	<ul style="list-style-type: none"> • This function make pseudo bass sound with the speaker which cannot make low frequency sound. • Generation frequency : 68Hz to 1200Hz, 16step
7	16-Band Parametric Equalizer	<ul style="list-style-type: none"> • Parametric Equalizer has built-in coefficient calculation circuit. • Only 4 factors is required.(Frequency/Gain/Quality factor/Filter type) • The Filter types which can be selected is Peaking/Low-shelf/High-shelf/Low-pass/High-pass/All-pass. • Lch/Rch become same set point. There is soft transition function. • The set point of F0: Divide between into 61 from 20 Hz to 20 kHz. • The set point of Gain: ±18dB (0.5dB step) • A big gain may be unable to be set up when exceeding the factor span of DSP (±4) at the time of a gain selecting. • Q (Quality factor) : 0.33 to 8.2, 29step. • It is also possible to set up a factor directly.
8	Fine Master Volume	<ul style="list-style-type: none"> • Lch / Rch become same set point. • +24dB to -103dB (0.125dB step)、-∞dB • There is soft transition function.
9	Balance	<ul style="list-style-type: none"> • 1dB step • There is soft transition function. (Lch/Rch:0dB/-∞dB, 0dB/-126dB, 0dB/-125dB, · · ·, 0dB/0dB, · · ·, -125dB/0dB, -126dB/0dB, -∞dB/0dB)
10	2 Band DRC	<ul style="list-style-type: none"> • Non clip output is achieved. • Lch/Rch becomes the same control. • Low-pass and a high region become an independent control. • Threshold level : +12dB to -32dB (0.5dB step) • The set point of Cross-over frequency : Divide between into 61 from 20 Hz to 20 kHz. • The voice below the set-up detect level is decreased gently.
11	Post-Scaler	<ul style="list-style-type: none"> • Lch / Rch become same set point. • +48dB to -79dB (0.5dB step)、-∞dB
12	Fine Post-Scaler	<ul style="list-style-type: none"> • Lch / Rch become independent set point. • +0.7dB to -0.8dB (0.1dB step)
13	DC cut HPF	<ul style="list-style-type: none"> • 1st order HPF • Fc : 1Hz
14	Clipper	<ul style="list-style-type: none"> • Lch / Rch become same set point. • Clip level : +3dB to 22.5dB (-0.1dB step)

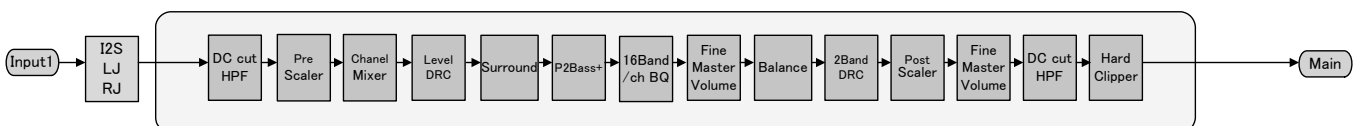


Figure .30 DSP Block diagram

●RSTX pin, MUTEX pin function

RSTX (4pin)	MUTEX (5pin)	DSP block condition	Speaker output condition
L	L	Reset ON	HiZ_Low (Low consumption)
H	L	Normal operation (Mute ON)	HiZ_Low (Mute ON)
H	H	Normal operation (Mute OFF)	Normal operation (Mute OFF)
L	H	Don't use.	

※RSTX is set Low, internal registers are initialized.

※VCCP1, VCCP2 < 2.5V, IC latched by protection circuit and ERROR terminal condition are initialized.

※If DVDD is under 3V, RSTX is set Low once for 10ms(min), and set High again. Then DSP is needed to set parameter again.


●Input Digital sound sampling frequency (fs) explanation

PWM sampling frequency of Speaker output and Soft-mute transition time depends on sampling frequency (fs) of the digital sound input. These transition times are changed by sending select address &h15[1:0].

Sampling frequency of the Digital sound input (fs)	Speaker output PWM sampling frequency	Soft-mute Transition time	
		Mute ON	Mute OFF
48kHz	384kHz	85.4msec	10.7msec
		42.7msec	10.7msec
		21.4msec	10.7msec
		10.7msec	10.7msec
44.1kHz	352.8kHz	92.9msec	11.7msec
		46.5msec	11.7msec
		23.3msec	11.7msec
		11.7msec	11.7msec
32 kHz	256kHz	128.1msec	16.1msec
		64.1msec	16.1msec
		32.1msec	16.1msec
		16.1msec	16.1msec

●2 wire Bus control signal specification

1) Electrical characteristics and Timing of Bus line and I/O stage

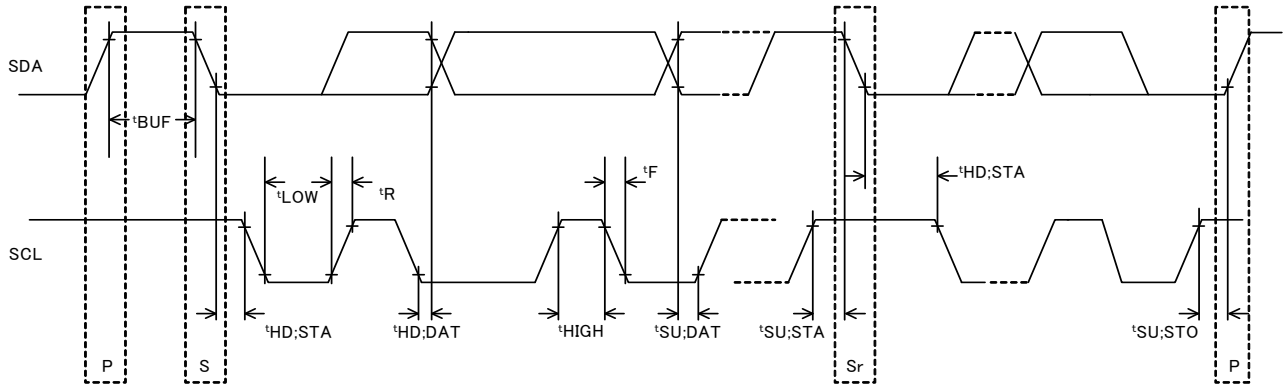

SDA and SCL bus line characteristics (Unless otherwise specified Ta=25°C, VCC=13V)

Parameter	Symbol	High speed mode		Unit
		Min.	Max.	
1 SCL clock frequency	fSCL	0	400	kHz
2 Bus free time between 「Stop」 condition and 「Start」 condition	tBUF	1.3	—	μS
3 Hold-time of (sending again) 「Start」 condition. After this period the first clock pulse is generated.	tHD;STA	0.6	—	μS
4 SCL clock's LOW state Hold-time	tLOW	1.3	—	μS
5 SCL clock's HIGH state Hold-time	tHIGH	0.6	—	μS
6 Set-up time of sending again 「Start」 condition	tSU;STA	0.6	—	μS
7 Data hold time	tHD;DAT	0 ^{*1}	—	μS
8 Data set-up time ^{*2}	tSU;DAT	500/250/150	—	ns
9 Rise-time of SDA and SCL signal	tR	20+0.1Cb	300	ns
10 Fall-time of SDA and SCL signal	tF	20+0.1Cb	300	ns
11 Set-up time of 「Stop」 condition	tSU;STO	0.6	—	μS
12 Capacitive load of each bus line	Cb	—	400	pF

The above-mentioned numerical values are all the values corresponding to VIH min and the VIL max level.


*1 To exceed an undefined area on the fall-edge of SCL (VIH min of the SCL signal), the transmitting set should internally offer the holding time of 300ns or more for the SDA signal.

*2 The data set-up time is different according to the setting of SYS_CLK.
When SYS_CLK=128fs it is 500ns, for SYS_CLK=256fs it is 250ns, for SYS_CLK=512fs it will be 150ns.

*3 SCL and SDA pin is not corresponding to threshold tolerance of 5V.
Please use it within 4.5V of the absolute maximum rating.

2) Command interface

2 wire Bus control is used for command interface between host CPU. It not only writes but also it is possible to read it excluding a part of register. In addition to “Slave Address “ , set and write 1 byte of “Select Address “ to read out the data. 2 wire bus Slave mode format is illustrated below.



S : Start Condition


Slave Address : The data of eight bits in total is sent putting up bit of Read mode (H) or Write mode (L) after slave address (7bit) set with the terminal ADDR. (MSB first)

A : The acknowledge bit adds to data that the acknowledge is sent and received in each byte.
When data is correctly sent and received, “L” is sent and received.
There was no acknowledgement for “H”.

Select Address : The select address in one byte is used. (MSB first)

Data : Data byte is sent and received data (MSB first)

P : Stop Condition

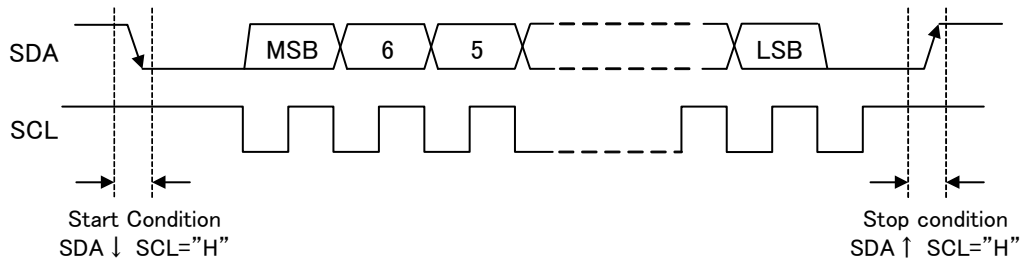

3) Slave Address

- While ADDR pin is "L"

MSB							LSB
A6	A5	A4	A3	A2	A1	A0	R/W
1	0	0	0	0	0	0	1/0

- While ADDR pin is "H"

MSB							LSB
A6	A5	A4	A3	A2	A1	A0	R/W
1	0	0	0	0	0	1	1/0


4) Writing of data

- Basic format



: Master to Slave, : Slave to Master



- Auto-increment format



: Master to Slave, : Slave to Master

5) Reading of data

First of all, the address (20h in the example) for reading is written in the register of the D0h address at the time of reading. In the following stream, data is read after the slave address. Please do not return the acknowledge when you end the reception.



: Master to Slave, : Slave to Master, A : With Acknowledge, \bar{A} : Without Acknowledge


●Format of digital audio input

- LRCLK: It is L/R clock input signal.
It corresponds to 32kHz/44.1kHz/48kHz with those clock (fs) that are same to the sampling frequency (fs) .
The audio data of a left channel and a right channel for one sample is input to this section.
- BCLK: It is Bit Clock input signal.
It is used for the latch of data in every one bit by sampling frequency's 48 times frequency (48fs) or 64 times sampling frequency (64fs). However if the 48fs being selected, the input will be Right-justified data format and held static.
- SDATA: It is Data input signal.
It is amplitude data. The data length is different according to the resolution of the input digital data.
It corresponds to 16/ 20/ 24 bit.


The digital input has I2S, Left-justified and Right-justified formats.
The figure below shows the timing chart of each transmission mode.

Bit clock 64fs


I²S 64fs Format

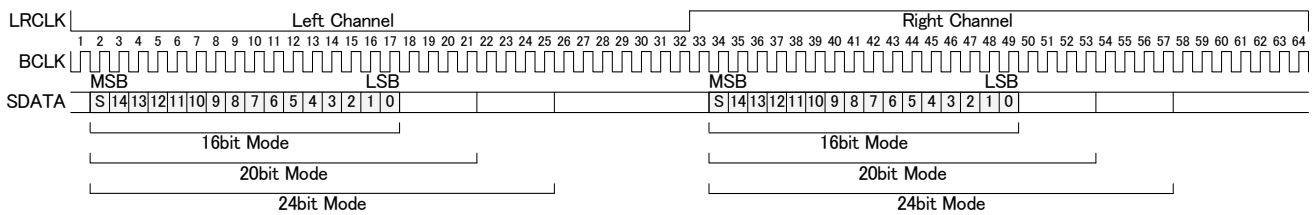

Left-Justified 64fs Format

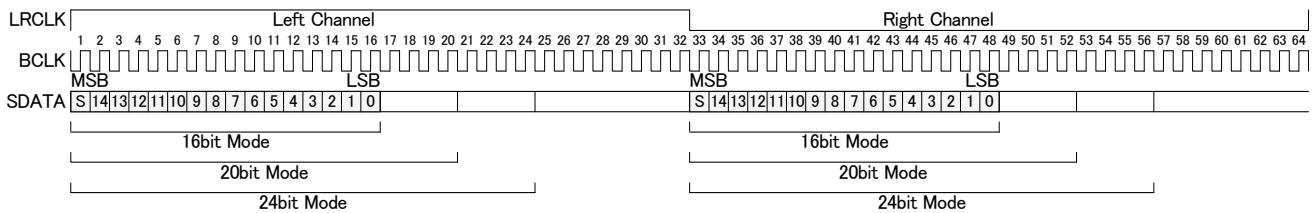


Right-Justified 64fs Format

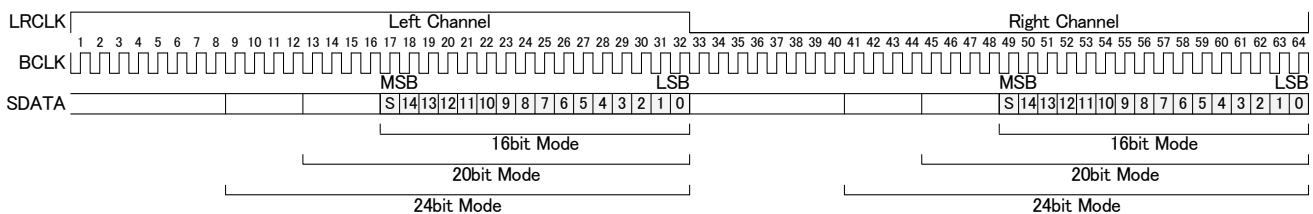


Bit clock 48fs


I²S 48fs Format

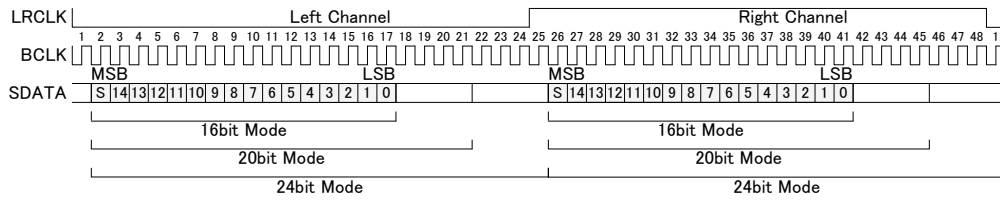

Left-Justified 48fs Format

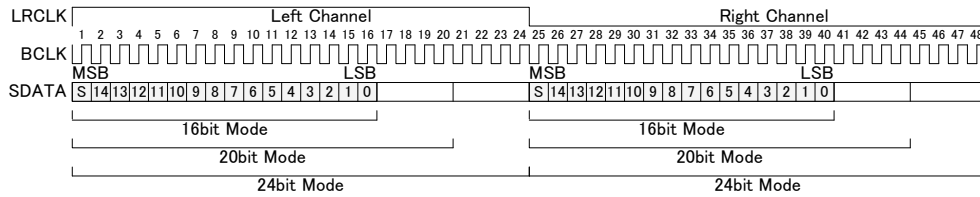


Right-Justified 48fs Format

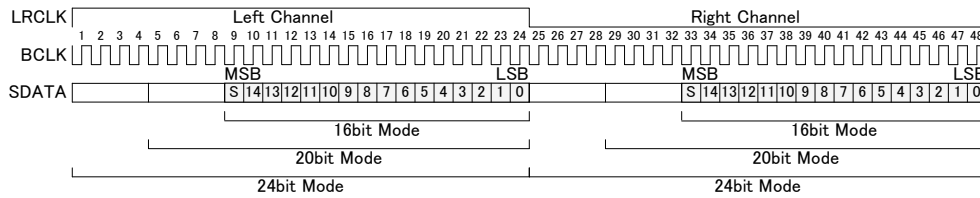


Bit clock 32fs


I²S 32fs Format

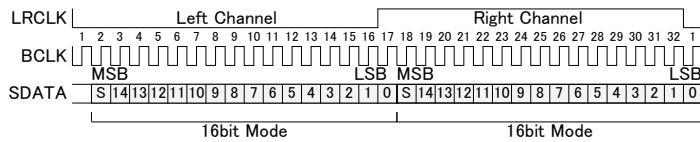

Left-Justified 32fs Format

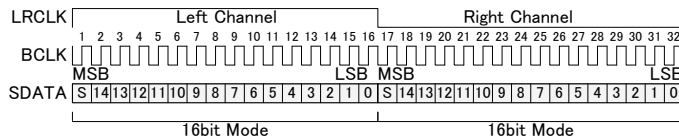

Right-Justified 32fs Format

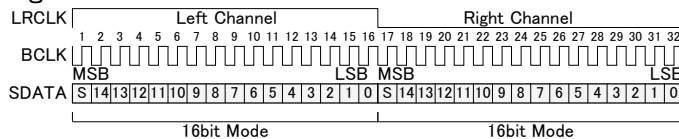

● Format setting for Digital Audio Interface

Please set Bit clock fs , Data strength and Format by transmitting command according to inputted Digital Serial Audio signal.

Bit clock

Default = 0

Select Address	Value	Explanation of operation
&h03[5:4]	0	64fs
	1	48fs
	2	32fs

Data Format

Default = 0

Select Address	Value	Explanation of operation
&h03[3:2]	0	IIS format
	1	Left-justified format
	2	Right-justified format

Data strength

Default = 2

Select Address	Value	Explanation of operation
&h03[1:0]	0	16 bit
	1	20 bit
	2	24 bit

●Audio Interface format and timing

Recommended timing and operating conditions (BCLK, LRCLK, SDATA)

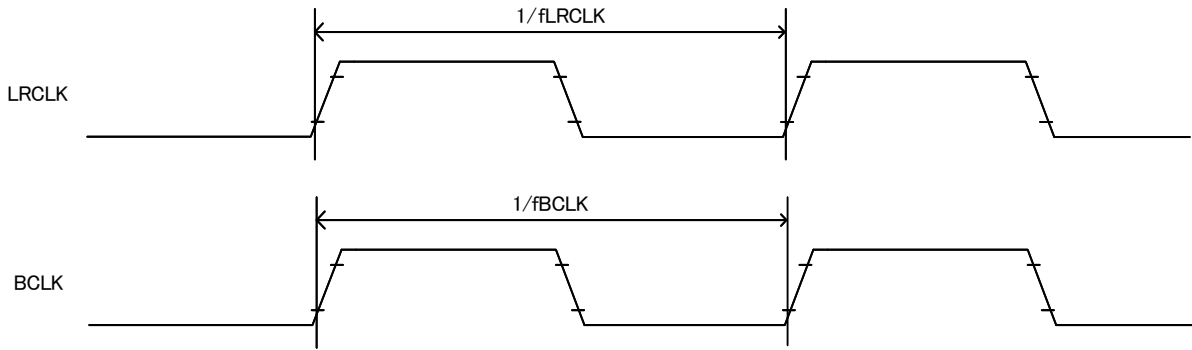


Figure .31 Clock timing


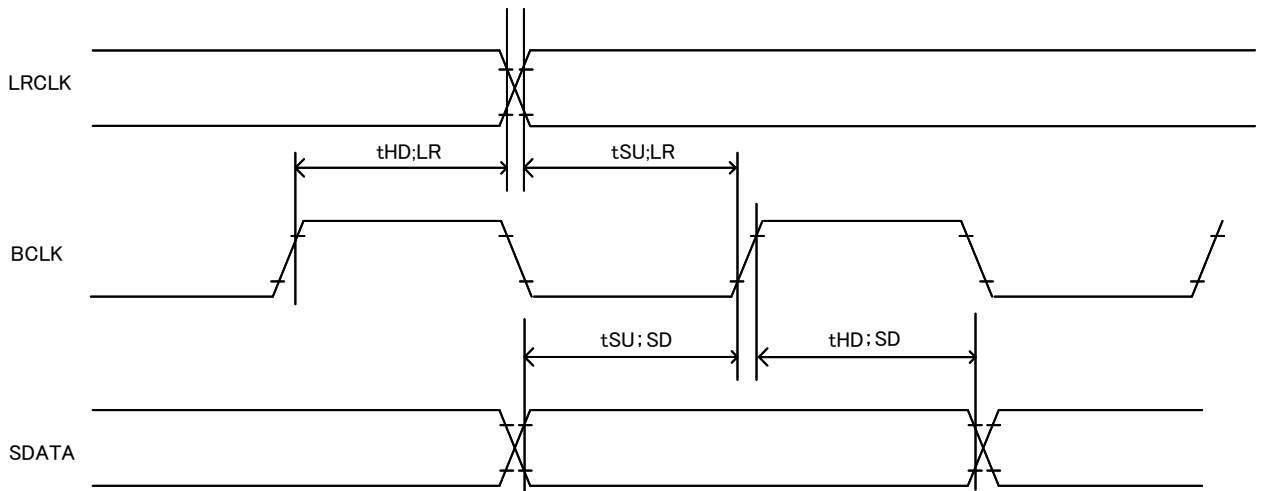


Figure .32 Audio Interface timing

No.	Parameter	Symbol	Limit		Unit
			Min.	Max.	
1	LRCLK frequency	fLRCLK	32	48	kHz
2	BCLK frequency	fBCLK	2.048	3.072	MHz
3	Setup time, LRCLK*1	tSU;LR	20	—	ns
4	Hold time, LRCLK*1	tHD;LR	20	—	ns
5	Setup time, SDATA	tSU;SD	20	—	ns
6	Hold time, SDATA	tHD;SD	20	—	ns
7	LRCLK, DUTY	dLRCLK	40	60	%
8	BCLK, DUTY	dBCLK	40	60	%


*1 This regulation is to keep rising edge of LRCK and rising edge of BCLK from overlapping.

●Power supply start-up sequence

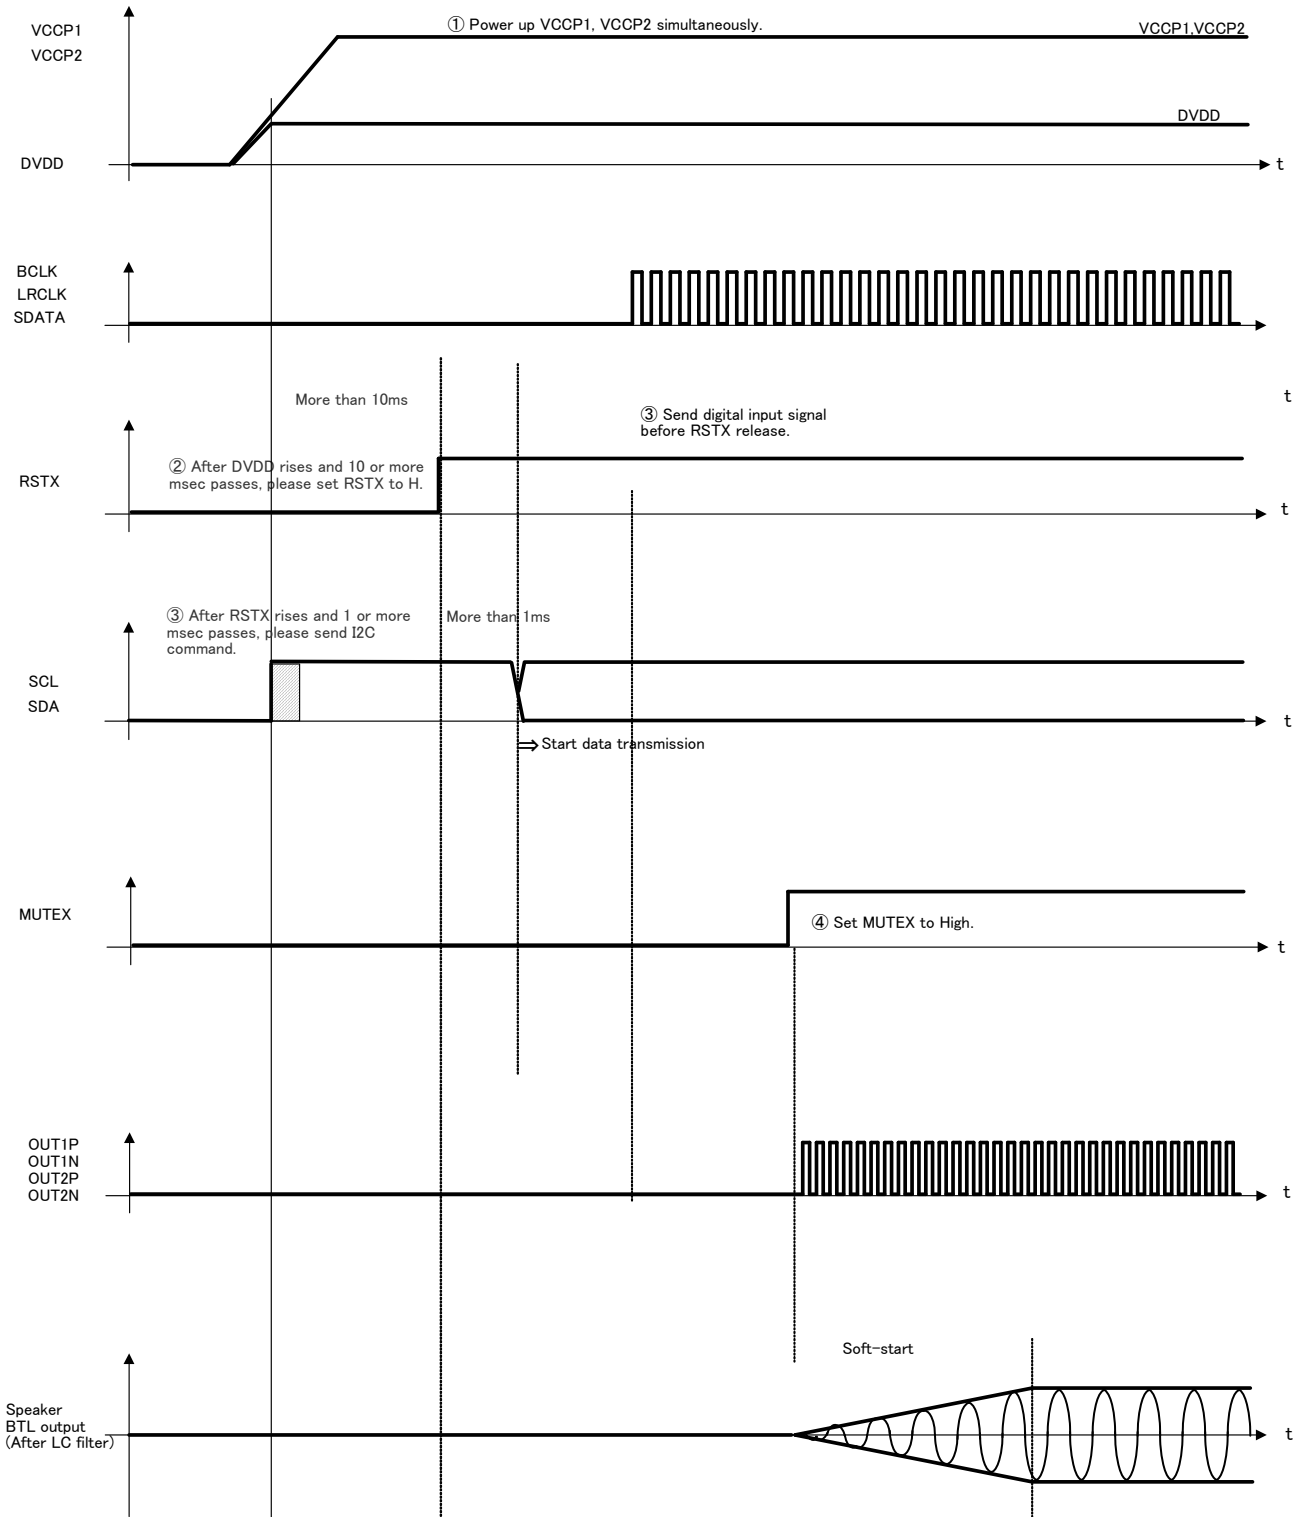

※To avoid POP noise or canceling error protection of IC, please set RSTX is L⇒H before MUTEX is L⇒H regularly.

● Power supply shut-down sequence

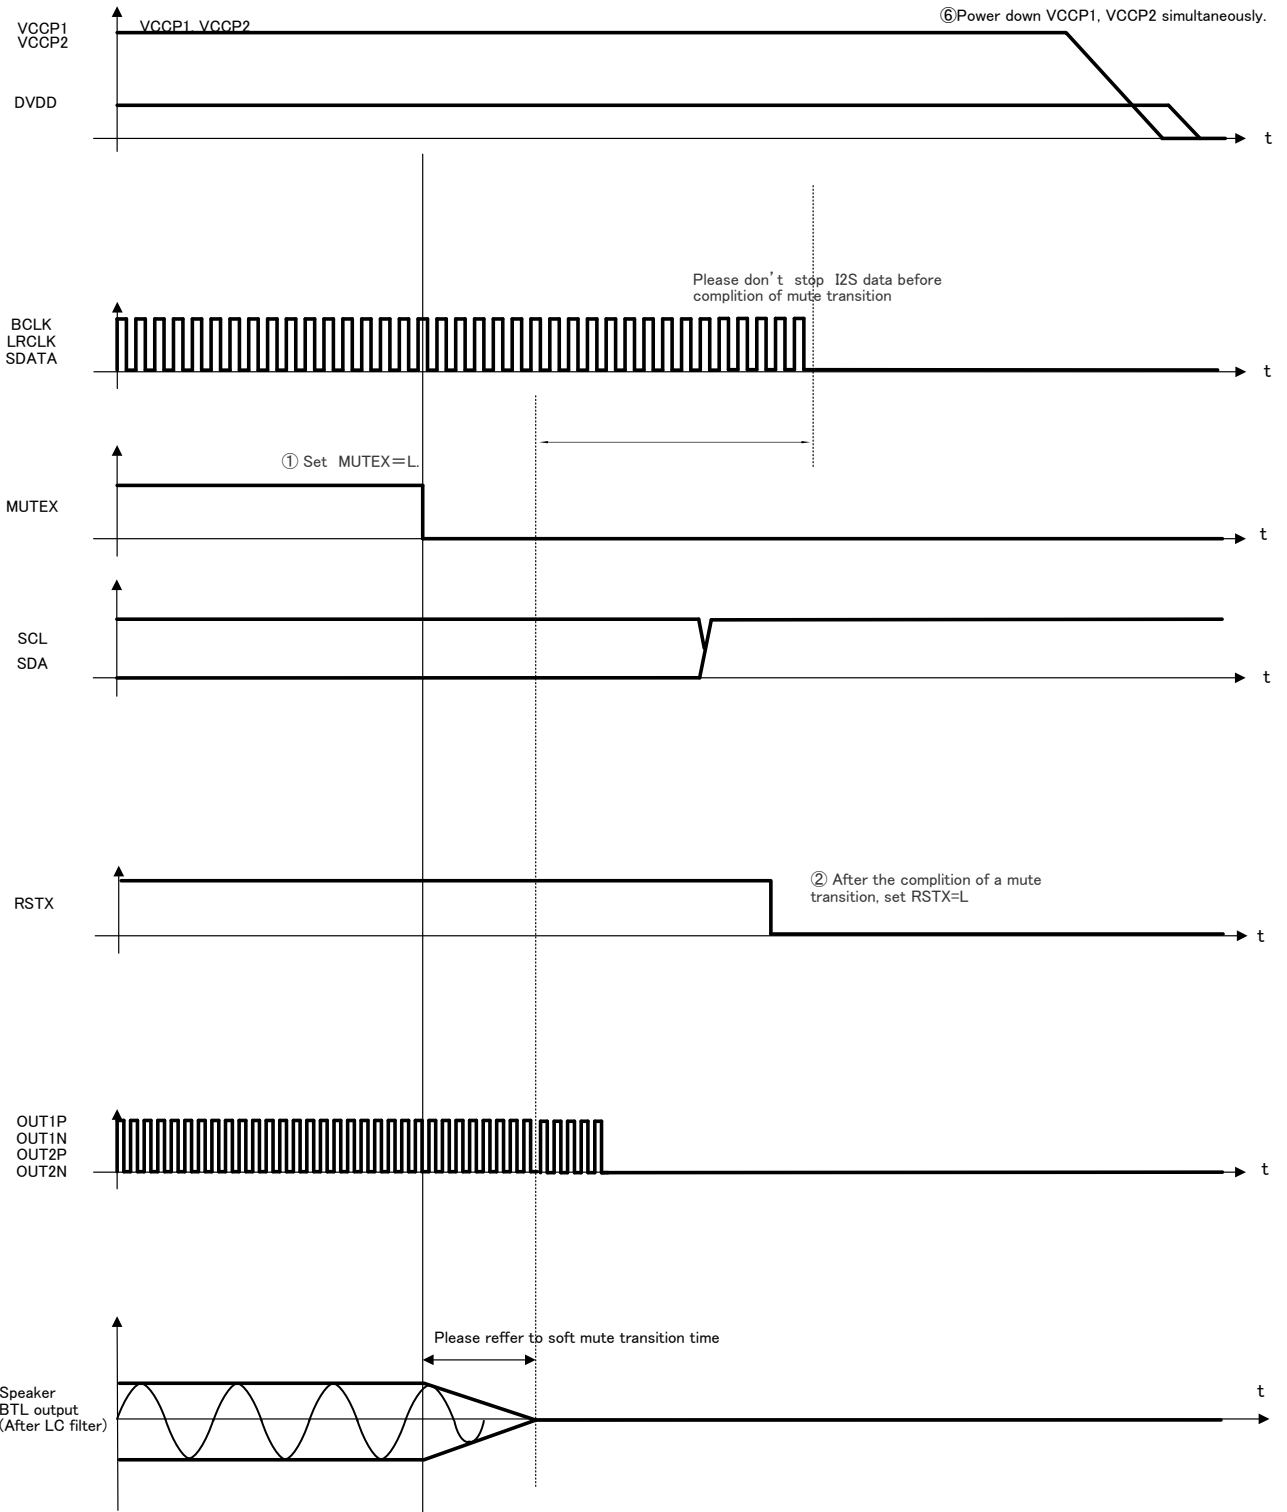

※To avoid POP noise or canceling error protection of IC, please set MUTE is H⇒L and keep mute transition time before RSTX is H⇒L regularly.

●About the protection function

Protection function	Detecting & Releasing condition		Speaker PWM output	ERROR output
Output short protection	Detecting condition	Detecting current = 7.2A (TYP.)	HiZ_Low (Latch) *1	L (Latch)
DC voltage protection	Detecting condition	PWM output Duty=0% or 100% for 12 μ sec(TYP)and over	HiZ_Low (Latch) *1	L (Latch)
High temperature protection	Detecting condition	Chip temperature to be above 150°C (TYP.)	HiZ_Low	H
	Releasing condition	Chip temperature to be below 120°C (TYP.)	Normal operation	
Under voltage protection	Detecting condition	Power supply voltage to be below 8.1V (TYP.)	HiZ_Low	H
	Releasing condition	Power supply voltage to be above 9.1V (TYP.)	Normal operation	
Over voltage protection	Detecting condition	Power supply voltage to be above 29.5V (TYP.)	HiZ_Low	H
	Releasing condition	Power supply voltage to be below 28.5V (TYP.)	Normal operation	
Clock stop protection	Detecting condition	BCLK signal have stopped among constant period. LRCLK signal have stopped among constant period. BCLK frequency is under constant value. BCLK frequency is over constant value. ※Please refer to chapter 6 about constant value.	HiZ_Low	H
	Releasing condition	LRCLK signal haven't stopped among constant period and BCLK continues 30 or more msec of condition within constant frequency.	Normal operation	

* The ERROR pin is Nch open-drain output.

*1 Once an IC is latched, the circuit is not released automatically even after an abnormal status is removed.

The following procedures ① or ② is available for recovery.

①After MUTEX pin is made Low once over the soft mute transition time, MUTEX pin is returned to High again.


②Turning on the power supply again (VCCP1, VCCP2<2.5V, 10ms(min)).

1) Output short protection (Short to the power supply)

This IC has the output short protection circuit that stops the PWM output when the PWM output is short-circuited to the power supply due to abnormality.

Detecting condition - It will detect when MUTEX pin is set High and the current that flows in the PWM output pin becomes 7.2A(TYP.) or more. The PWM output instantaneously enters the state of HiZ-Low if detected, and IC does the latch.

Releasing method - ①After MUTEX pin is set Low once over the soft mute transition time(see page 23/106), MUTEX pin is returned to High again.
 ②Turning on the power supply again (VCCP1, VCCP2<2.5V, 10ms(min)).

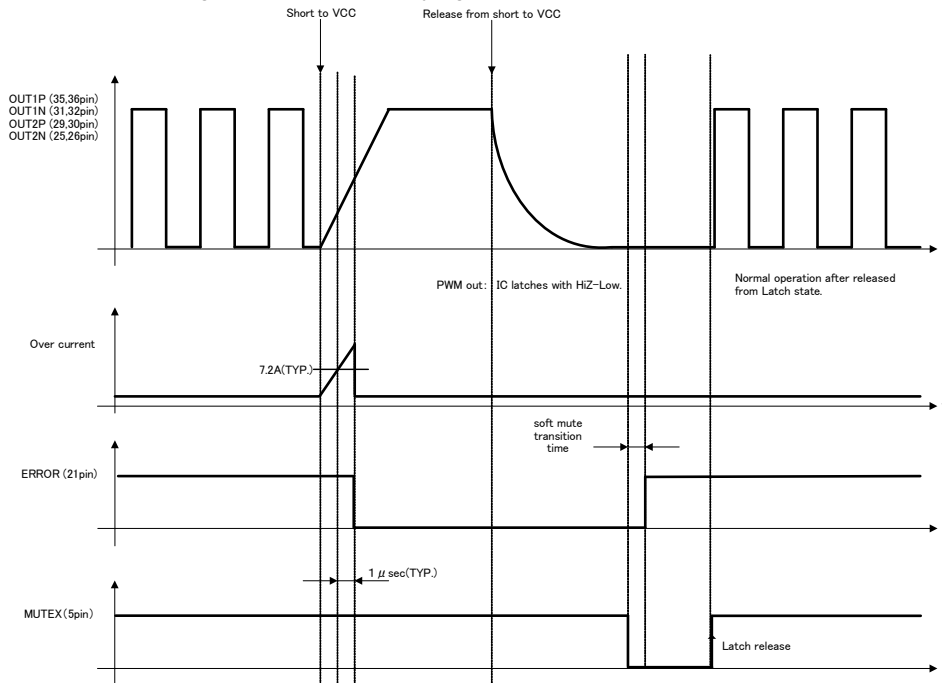


2) Output short protection (Short to GND)

This IC has the output short protection circuit that stops the PWM output when the PWM output is short-circuited to GND due to abnormality.

Detecting condition - It will detect when MUTEX pin is set High and the current that flows in the PWM output terminal becomes 7.2A(TYP.) or more. The PWM output instantaneously enters the state of HiZ-Low if detected, and IC does the latch.

Releasing method - ①After MUTEX pin is set Low once over the soft mute transition time(see page 23/106), MUTEX pin is returned to High again.
 ②Turning on the power supply again (VCCP1, VCCP2<2.5V, 10ms(min)).

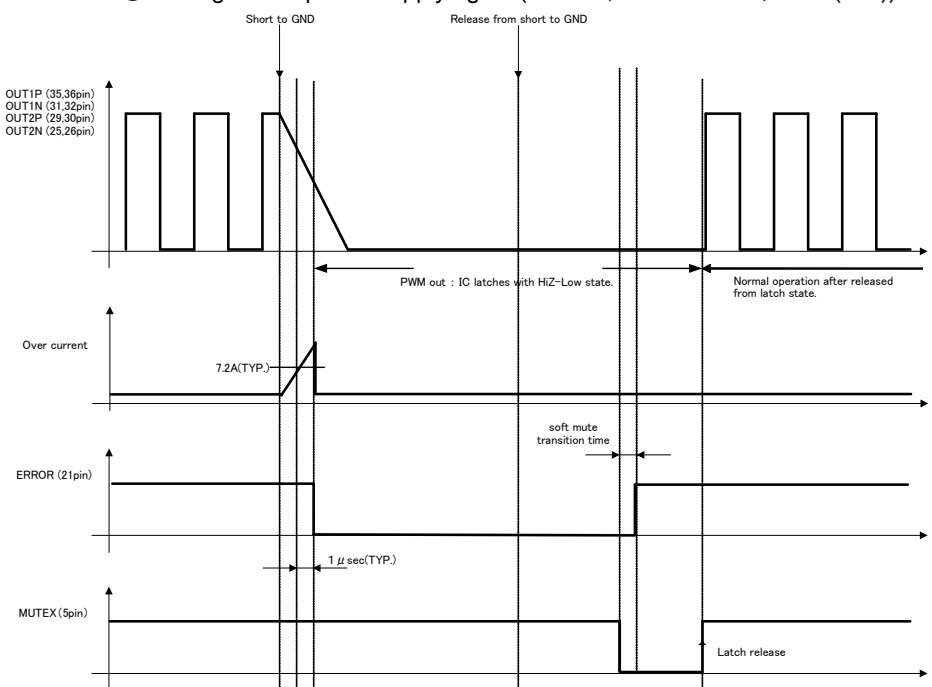


3) DC voltage protection in the speaker

When the DC voltage in the speaker is impressed due to abnormality, this IC has the protection circuit where the speaker is defended from destruction.

Detecting condition - It will detect when MUTEX pin is set High and PWM output Duty=0% or 100% over 12 μ sec.(fs=48kHz) Once detected, The PWM output instantaneously enters the state of HiZ-Low, and IC does the latch.

Releasing method – ①After MUTEX pin is set Low once over the soft mute transition time(see page 23/106), MUTEX pin is returned to High again.

②Turning on the power supply again (VCCP1, VCCP2<2.5V, 10ms(min)).

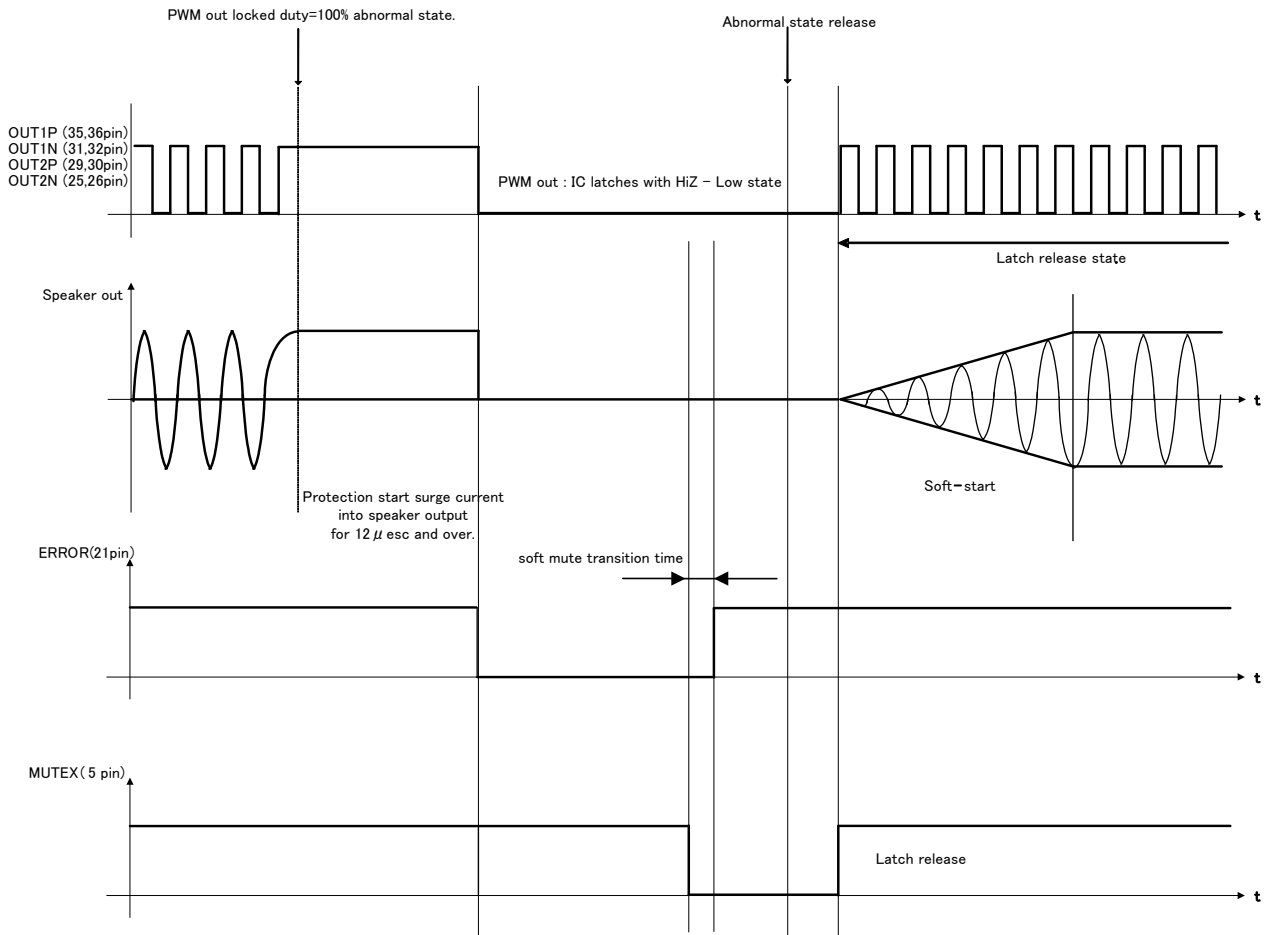


4) High temperature protection

This IC has the high temperature protection circuit that prevents thermal reckless driving under an abnormal state for the temperature of the chip to exceed $T_{jmax}=150^{\circ}\text{C}$.

Detecting condition - It will detect when MUTEX pin is set High and the temperature of the chip becomes 150°C (TYP.) or more. The speaker output is muted when detected.

Releasing condition - It will release when MUTEX pin is set High and the temperature of the chip becomes 120°C (TYP.) or less. The speaker output is outputted when released.

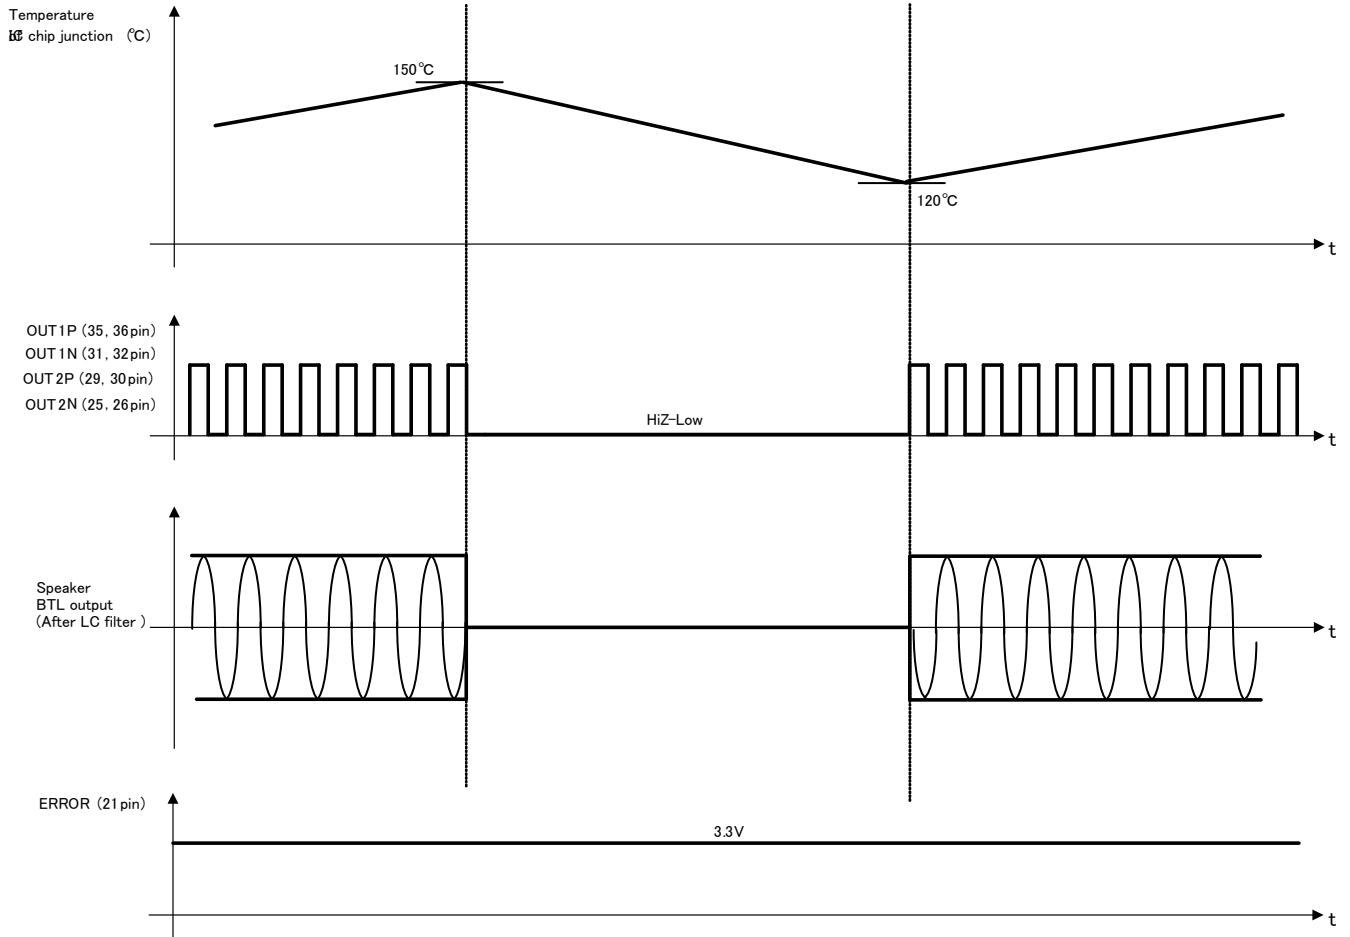


5) Under voltage protection

This IC has the under voltage protection circuit that make speaker output mute once detecting extreme drop of the power supply voltage.

Detecting condition – It will detect when MUTEX pin is set High and the power supply voltage becomes lower than 8.1V. The speaker output is muted when detected.

Releasing condition – It will release when MUTEX pin is set High and the power supply voltage becomes more than 9.1V. The speaker output is outputted when released.

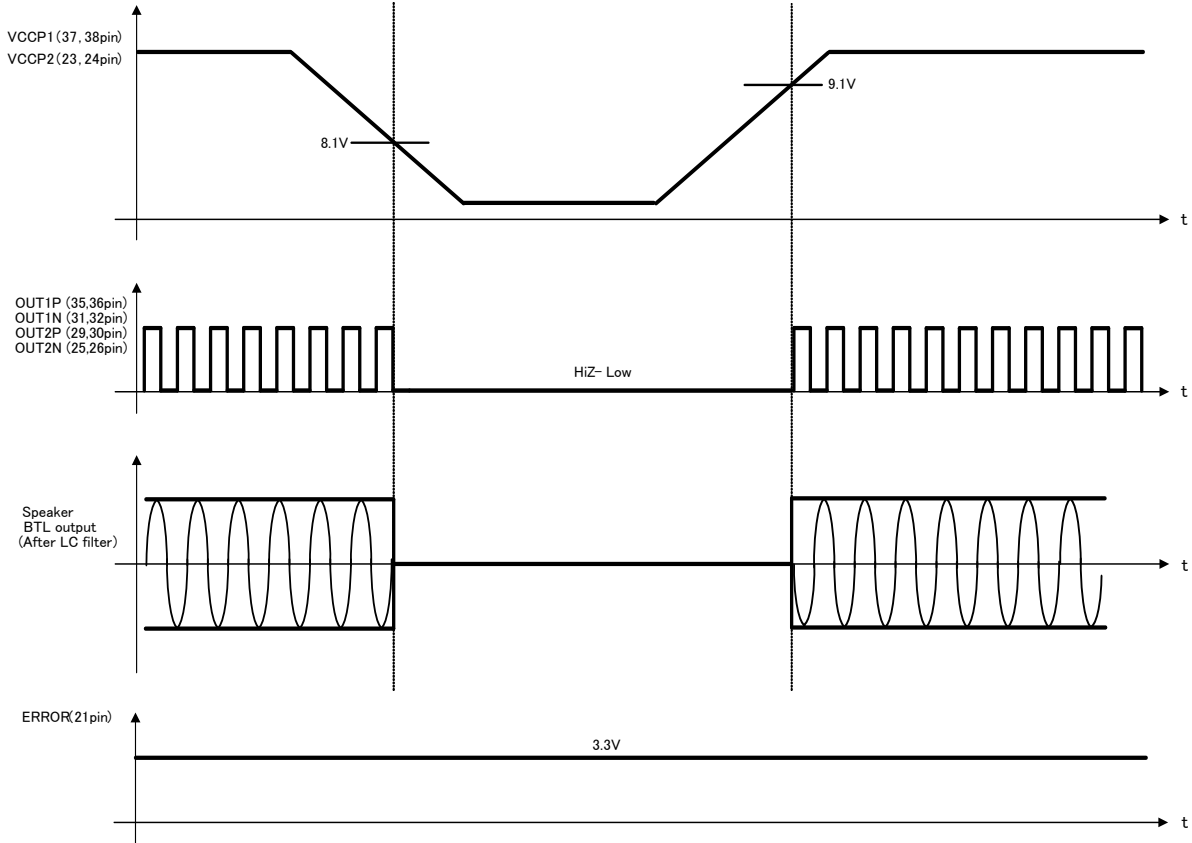


6) Over voltage protection

This IC has the over voltage protection circuit that make speaker output mute once detecting extreme drop of the power supply voltage.

Detecting condition – It will detect when MUTEX pin is set High and the power supply voltage becomes more than 29.5V. The speaker output is muted when detected.


Releasing condition – It will release when MUTEX pin is set High and the power supply voltage becomes less than 28.5V. The speaker output is outputted when released.

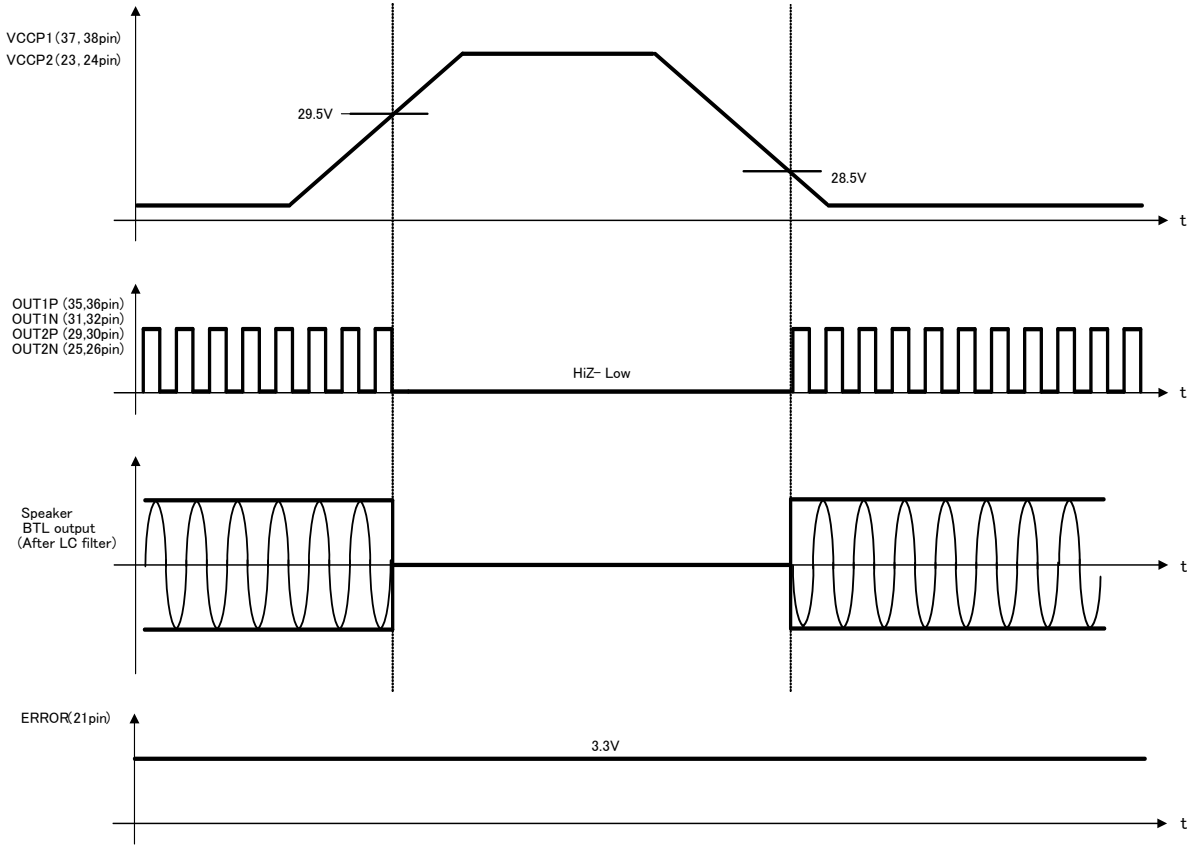

7) Clock stop protection

This IC has the clock stop protection circuits that make the speaker output mute when the BCLK and LRCLK frequency of the digital sound input are decreased or low frequency.

Detecting condition - BCLK frequency is low or stop, LRCLK frequency is stop. The speaker output is muted.
 Releasing condition - BCLK and LRCK are OK over 60msec(max).

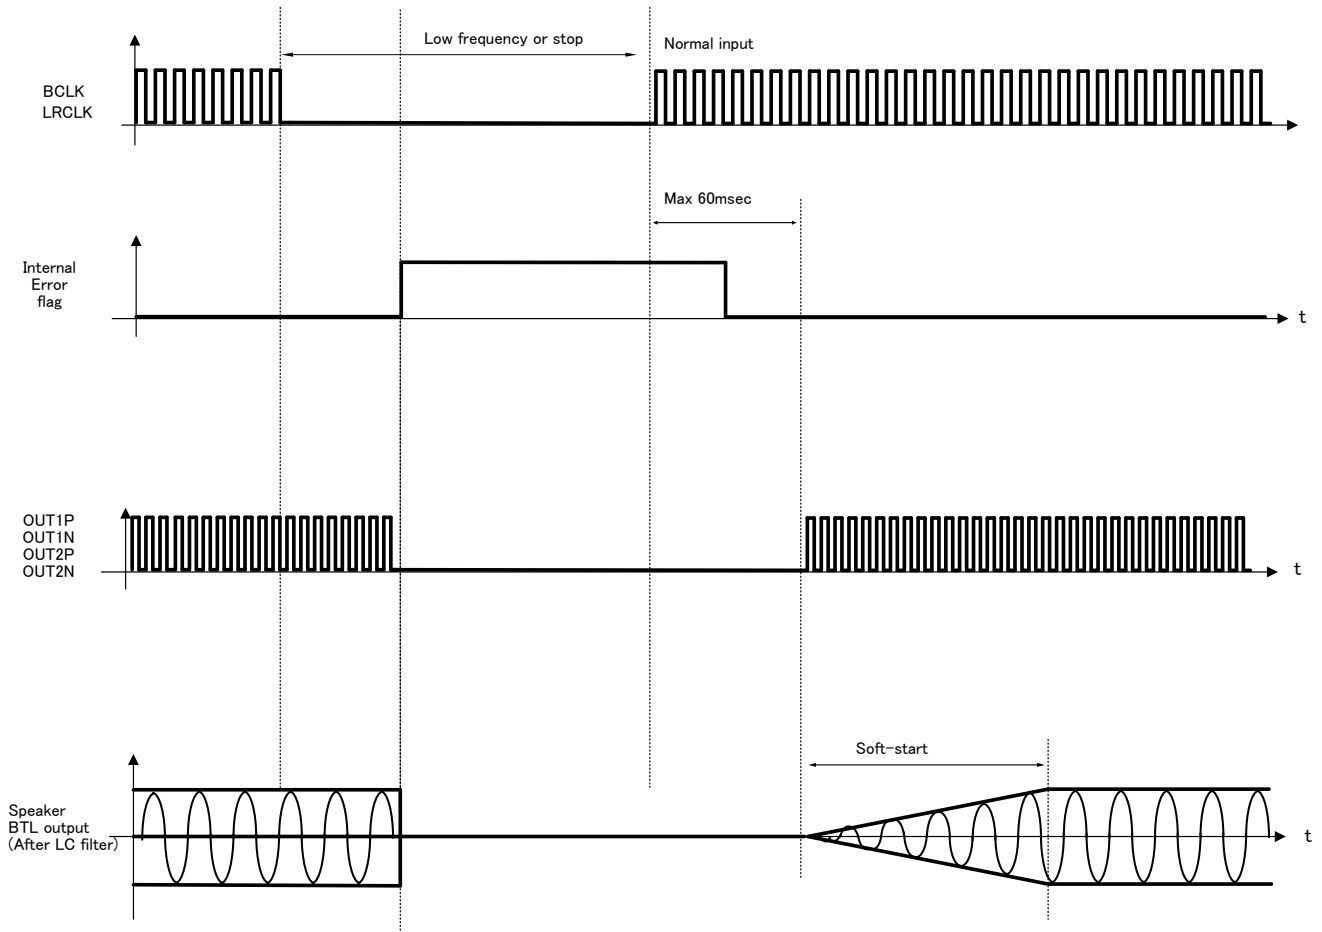

●Functional descriptions of DSP Block



1. Digital Sound Processing (DSP)

The digital sound processing (DSP) part of BM5480 is composed of the special hard ware which is the optimal for FPD-TV, the Mini/Micro Compo. BM5480MUV does the following processing using this special DSP.


**DC cut HPF、Pre-scaler、Chanel mixer、Level DRC、Surround、P²Bass+、16 Band P-EQ、
Fine Master Volume、Balance Volume、2 Band DRC、Post-scaler、Fine Post-scaler、Hard Clipper**

The outline and signal flow of the DSP part

Data width:	32 bit (DATA RAM)
Machine cycle:	20.3ns (1024fs, fs=48kHz)
Multiplier:	32 × 24 → 56 bit
Adder:	56 + 56 → 56 bit
Data RAM:	512 × 32 bit
Coefficient RAM:	512 × 24 bit
Sampling frequency :	fs=32k,44.1k,48kHz

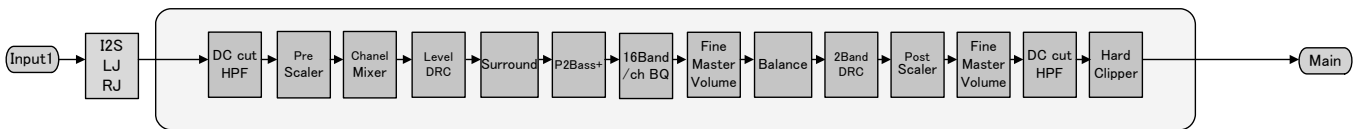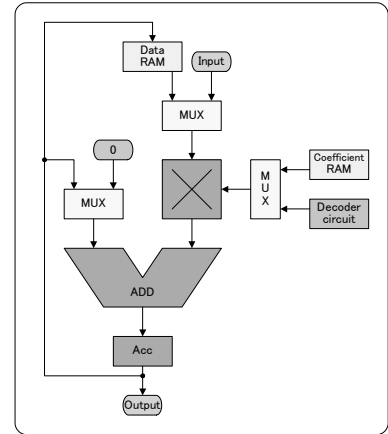


The digital signal from 16 bits to 24 bits is inputted to the DSP but extends 8bit(+48dB) as the overflow margin to the upper side. When doing the processing which exceeds this range, it processes a clip in the DSP. Incidentally, in case of the 2nd IIR-type (BQ) filter which is often used generally as the digital filter, because it consumes a lot of overflow margins, the output of the multiplier and the adder inside needs note.

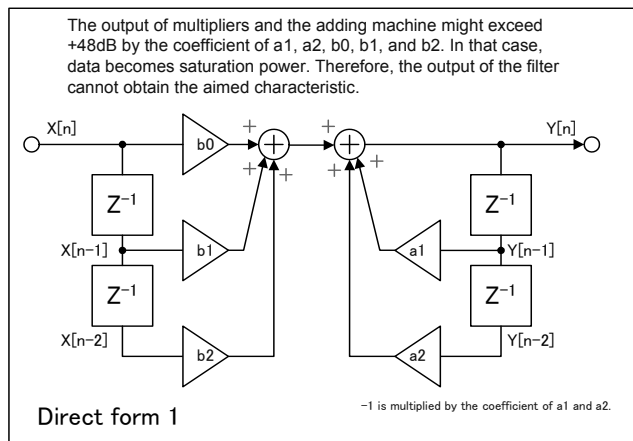

The output of multipliers and the adding machine might exceed +48dB by the coefficient of a1, a2, b0, b1, and b2. In that case, data becomes saturation power. Therefore, the output of the filter cannot obtain the aimed characteristic.

Direct form 1


The management of audio data is as follows by each block.

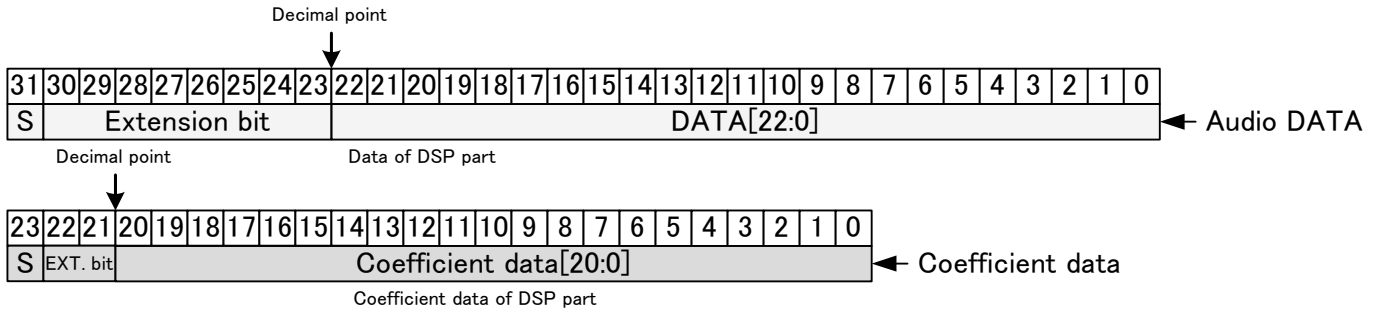

1-1 Bypass

It passes in the each function of the DSP by the command. Because it left the set value of the each function can be passed in, it is possible to do the confirmation of ON/OFF of the sound effect easily.

The effect which is possible about the bypass , 1) LEVEL DRC, 2) Surround 3) P²Bass + (Pseudo Bass) , 4) 16Band BQ, 5) 2Band DRC and the whole DSP can be passed.

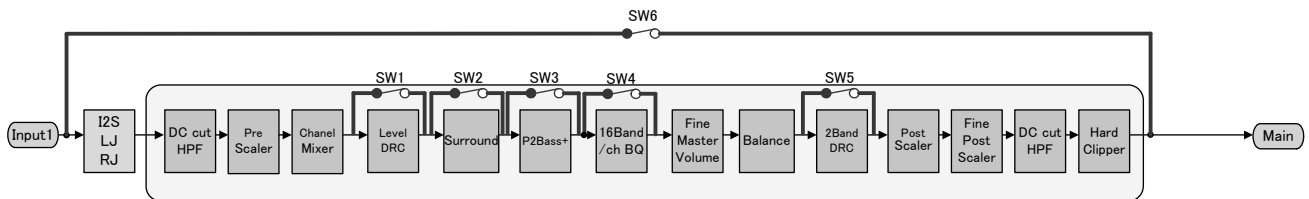

Default = 00h

Select Address	bit	Explanation of operation (*) '1' bypasses each function.
&h02 [5:0]	5	Bypass of LEVEL DRC (SW1) 0:Normal 1:Bypass
	4	Bypass of Surround (SW2) 0:Normal 1:Bypass
	3	Bypass of P ² Bass+ (SW3) 0:Normal 1:Bypass
	2	Bypass of 16Band BQ (SW4) 0:Normal 1:Bypass
	1	Bypass of 2band DRC (SW5) 0:Normal 1:Bypass
	0	Bypass of DSP (SW6) 0:Normal 1:Bypass

1-2. Pre-scaler


To overflow when the level sometimes is full scale entry in case of the digital signal which is inputted to the sound DSP and does surround and equalizer processing, it adjusts an entry gain with Pre-scaler. The adjustable-range can be set from +48 dB to -79 dB with the 0.5-dB step. (Lch/Rch concurrency control)
 Pre-scaler doesn't have a soft transfer feature.

Default = 60h

Select Address	Explanation of operation																				
&h16 [7:0]	<table border="1"> <thead> <tr> <th>Command Value</th> <th>Gain</th> </tr> </thead> <tbody> <tr> <td>00</td> <td>+48dB</td> </tr> <tr> <td>01</td> <td>+47.5dB</td> </tr> <tr> <td>⋮</td> <td>⋮</td> </tr> <tr> <td>60</td> <td>0dB</td> </tr> <tr> <td>61</td> <td>-0.5dB</td> </tr> <tr> <td>62</td> <td>-1dB</td> </tr> <tr> <td>⋮</td> <td>⋮</td> </tr> <tr> <td>FE</td> <td>-79dB</td> </tr> <tr> <td>FF</td> <td>-∞</td> </tr> </tbody> </table>	Command Value	Gain	00	+48dB	01	+47.5dB	⋮	⋮	60	0dB	61	-0.5dB	62	-1dB	⋮	⋮	FE	-79dB	FF	-∞
Command Value	Gain																				
00	+48dB																				
01	+47.5dB																				
⋮	⋮																				
60	0dB																				
61	-0.5dB																				
62	-1dB																				
⋮	⋮																				
FE	-79dB																				
FF	-∞																				

1-3. Channel setup with a phase inversion function (Channel Mixer 1)

It sets a mixing in the sound on the left channel and the right channel of the digital signal which was inputted to the DSP. It makes a stereo signal a monaural here. Also, the phase-inversion, the mute on each channel can be set.

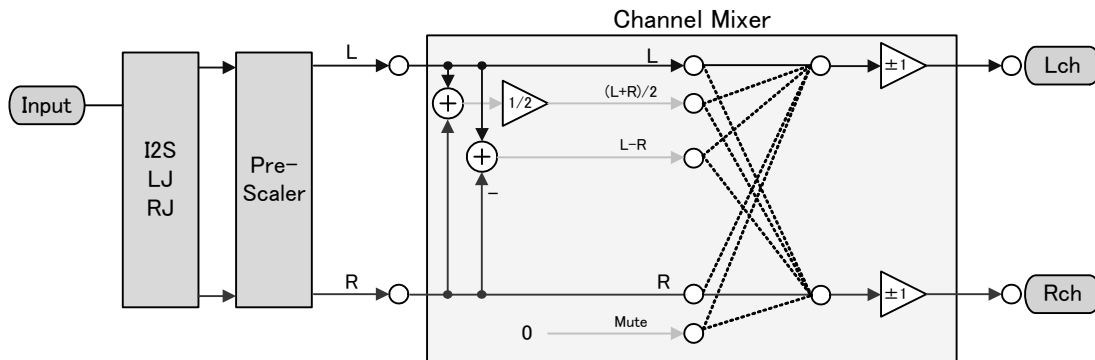

DSP Input : The data inputted into Lch of DSP is inverted.

Default = 0

Select Address	Value	Explanation of operation
&h17[7]	0	Normal
	1	Invert

DSP Input : The data inputted into Lch of DSP is mixed.

Default = 1

Select Address	Value	Explanation of operation
&h17 [6:4]	0	Mute
	1	Lch data input
	2	Rch data input
	3	(Lch + Rch) / 2
	4	Lch-Rch
	5	-
	6	-
	7	-

DSP input : The data inputted into Rch of DSP is inverted.

Default = 0

Select Address	Value	Explanation of operation
&h17 [3]	0	Normal
	1	Invert

DSP Input : The data inputted into Rch of DSP is mixed.

Default = 2

Select Address	Value	Explanation of operation
&h17 [2:0]	0	Mute
	1	Lch data input
	2	Rch data input
	3	(Lch + Rch) / 2
	4	Lch-Rch
	5	-
	6	-
	7	-

1-4. 1st HPF for DC cut (Front)

It cuts the DC offset component of the digital signal which is inputted to the sound DSP with this HPF. The cut off frequency fc of HPF is using 1 Hz and the degree is using the 1st filter.

Default = 1

Select Address	Value	Explanation of operation
Input1 &h18 [1]	0	Not use DC cut HPF
	1	Use DC cut HPF

1-5. Surround

Surround 1 emphasizes the stereo feeling, and is suitable for the music source. Surround 2 is effective of a pseudo stereo. Because the monaural voice is pseudo made a stereo, it is suitable for the talk show etc. of the studio recording.

Surround1 function ON/OFF

Default = 0


Select Address	Value	Explanation of operation
&h40[7]	0	Surround1 OFF
	1	Surround1 ON

Surround2 function ON/OFF

Default = 0

Select Address	Value	Explanation of operation
&h40 [6]	0	Surround2 OFF
	1	Surround2 ON

Surround1

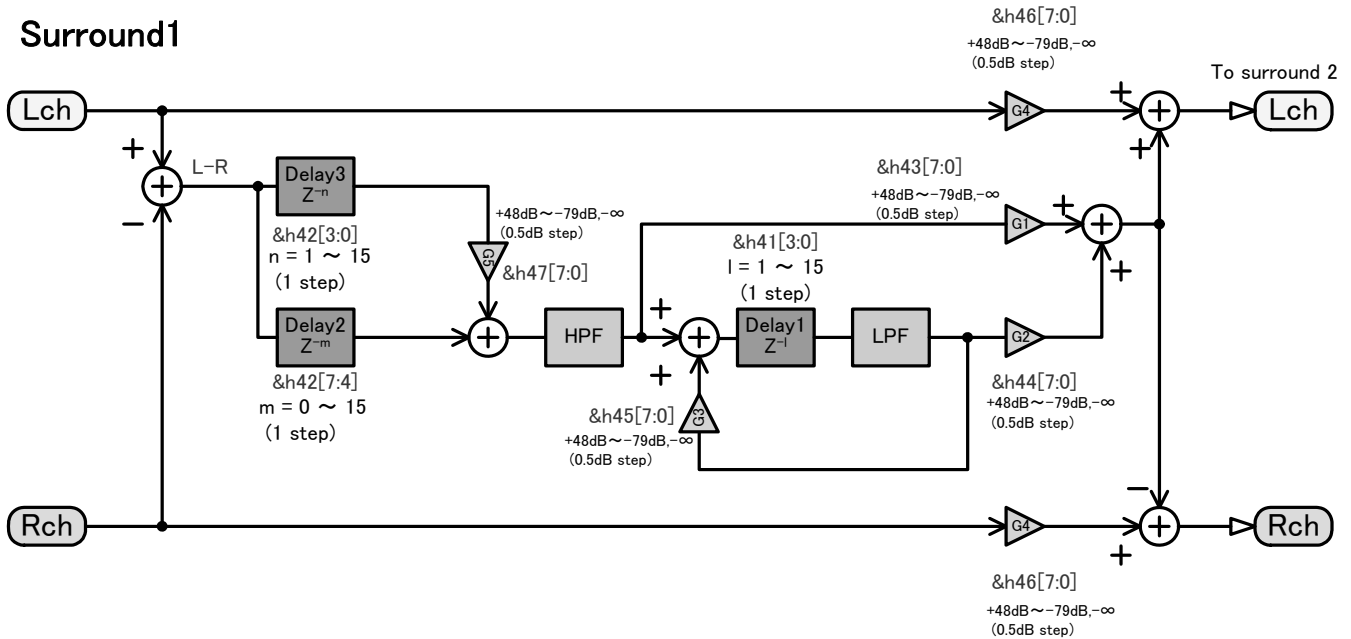

Surround1 Delay value of feedback part setting for surround effect 1 (Delay1)

Default = 2h

Select Address	Explanation of operation
&h41 [3:0]	The command value becomes the amount of the delay. One sample delay is about 21μs. “0” is a set prohibition.

Surround 1 Delay value of input part setting for surround effect 1 (Delay2)

Default = 2h

Select Address	Explanation of operation
&h42 [7:4]	The command value becomes the amount of the delay. One sample delay is about 21μs.

Surround 1 Delay value of input part setting for surround effect 1 (Delay3)

Default = 1h

Select Address	Explanation of operation
&h42 [3:0]	The command value becomes the amount of the delay. One sample delay is about 21μs. "0" is a set prohibition.

Surround 1 Additive gain setting for surround effect 1 (G1, G2, G3)

Default =66h(G1),70h(G2),70h(G3)

Select Address	Explanation of operation	
	Command	Gain
G1 : &h43 [7:0]	00	+48dB
G2 : &h44 [7:0]	01	+47.5dB
G3 : &h45 [7:0]	⋮	⋮
	60	0dB
	61	-0.5dB
	62	-1dB
	⋮	⋮
	FE	-79dB
	FF	-∞

Surround 1 Additive gain setting for surround effect 1 (G4)

Default = 60h

Select Address	Explanation of operation	
&h46 [7:0]	Command	Gain
	00	+48dB
	01	+47.5dB
	⋮	⋮
	60	0dB
	61	-0.5dB
	62	-1dB
	⋮	⋮
	FE	-79dB
	FF	-∞

Surround 1 Additive gain setting for surround effect 1 (G5)

Default = FFh

Select Address	Explanation of operation	
&h47 [7:0]	Command	Gain
	00	+48dB
	01	+47.5dB
	⋮	⋮
	60	0dB
	61	-0.5dB
	62	-1dB
	⋮	⋮
	FE	-79dB
	FF	-∞

Surround1 HPF

Default=3h


Select Address	Explanation of operation																																							
&h48 [7:4]	<table border="1"> <thead> <tr> <th>Command</th> <th>Cut off freq.</th> <th>Command</th> <th>Cut off freq.</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Through</td> <td>8</td> <td>1200Hz</td> </tr> <tr> <td>1</td> <td>330Hz</td> <td>9</td> <td>1500Hz</td> </tr> <tr> <td>2</td> <td>390Hz</td> <td>A</td> <td>-</td> </tr> <tr> <td>3</td> <td>470Hz</td> <td>B</td> <td>-</td> </tr> <tr> <td>4</td> <td>560Hz</td> <td>C</td> <td>-</td> </tr> <tr> <td>5</td> <td>680Hz</td> <td>D</td> <td>-</td> </tr> <tr> <td>6</td> <td>820Hz</td> <td>E</td> <td>-</td> </tr> <tr> <td>7</td> <td>1000Hz</td> <td>F</td> <td>-</td> </tr> </tbody> </table>				Command	Cut off freq.	Command	Cut off freq.	0	Through	8	1200Hz	1	330Hz	9	1500Hz	2	390Hz	A	-	3	470Hz	B	-	4	560Hz	C	-	5	680Hz	D	-	6	820Hz	E	-	7	1000Hz	F	-
Command	Cut off freq.	Command	Cut off freq.																																					
0	Through	8	1200Hz																																					
1	330Hz	9	1500Hz																																					
2	390Hz	A	-																																					
3	470Hz	B	-																																					
4	560Hz	C	-																																					
5	680Hz	D	-																																					
6	820Hz	E	-																																					
7	1000Hz	F	-																																					

Surround1 LPF

Default=5h

Select Address	Explanation of operation																																							
&h48 [3:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>Cut off freq.</th> <th>Command</th> <th>Cut off freq.</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Through</td> <td>8</td> <td>5600Hz</td> </tr> <tr> <td>1</td> <td>1500Hz</td> <td>9</td> <td>6800Hz</td> </tr> <tr> <td>2</td> <td>1800Hz</td> <td>A</td> <td>-</td> </tr> <tr> <td>3</td> <td>2200Hz</td> <td>B</td> <td>-</td> </tr> <tr> <td>4</td> <td>2700Hz</td> <td>C</td> <td>-</td> </tr> <tr> <td>5</td> <td>3300Hz</td> <td>D</td> <td>-</td> </tr> <tr> <td>6</td> <td>3900Hz</td> <td>E</td> <td>-</td> </tr> <tr> <td>7</td> <td>4700Hz</td> <td>F</td> <td>-</td> </tr> </tbody> </table>				Command	Cut off freq.	Command	Cut off freq.	0	Through	8	5600Hz	1	1500Hz	9	6800Hz	2	1800Hz	A	-	3	2200Hz	B	-	4	2700Hz	C	-	5	3300Hz	D	-	6	3900Hz	E	-	7	4700Hz	F	-
Command	Cut off freq.	Command	Cut off freq.																																					
0	Through	8	5600Hz																																					
1	1500Hz	9	6800Hz																																					
2	1800Hz	A	-																																					
3	2200Hz	B	-																																					
4	2700Hz	C	-																																					
5	3300Hz	D	-																																					
6	3900Hz	E	-																																					
7	4700Hz	F	-																																					

Surround2

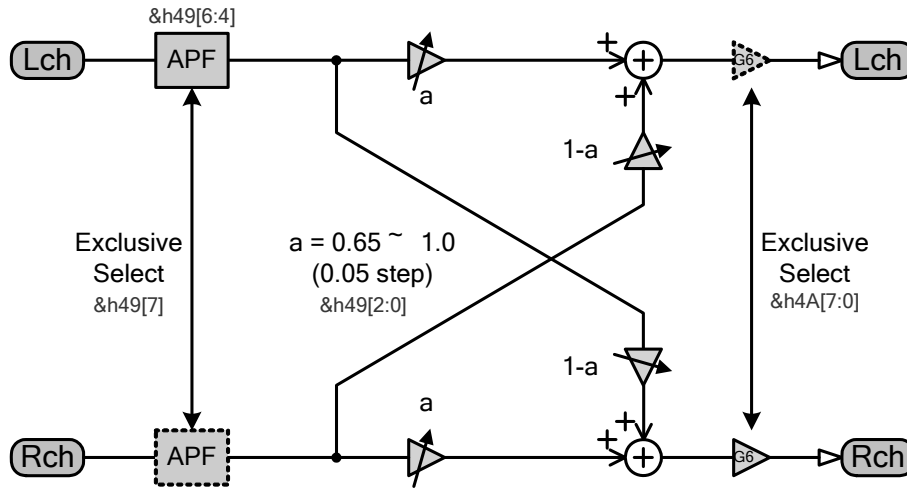

Surround 2 APF (All Pass Filter) select
Select which channel of L/Rch to insert APF.

Default = 0

Select Address	Value	Explanation of operation
&h49 [7]	0	Lch
	1	Rch

Surround 2 APF (All Pass Filter) Cut off frequency

Default = 0

Select Address	Value	Explanation of operation
&h49 [6:4]	0	22Hz
	1	47Hz
	2	100Hz
	3	220Hz
	4	470Hz

Surround 2 LR mixing gain

Change the LR mix gain in surround effect 2. The sound extends to the setting of about big gain.

Default = 2h

Select Address	Explanation of operation			
&h49 [2:0]	Command	Gain	Command	Gain
	0	x0	4	x0.2
	1	x0.05	5	x0.25
	2	x0.1	6	x0.3
	3	x0.15	7	x0.35

Surround Output gain

Change the gain of the channel opposite to the channel selected with &h49[7].


Default = 60h

Select Address	Explanation of operation	
&h4A [7:0]	Command	Gain
	00	+48dB
	01	+47.5dB
	⋮	⋮
	60	0dB
	61	-0.5dB
	62	-1dB
	⋮	⋮
	FE	-79dB
	FF	-∞



1-6. Pseudo bass (P²Bass+)

A Pseudo bass function is a function which turns into that it is possible to emphasize low frequency sound effectively also to the low speaker of low-pass reproduction capability.
 In order to be audible as the fundamental wave is sounding in false by adding 2 double sound and 3 time sound to a fundamental wave, the reproduction capability of the band of a fundamental wave becomes possible.
 Although use independently is also possible for a pseudo bass function, low-pitched sound can be emphasized more by combining with P²Bass function.
 Moreover, since it is possible to change the band to emphasize, optimizing to the frequency characteristic of the speaker to be used is possible.

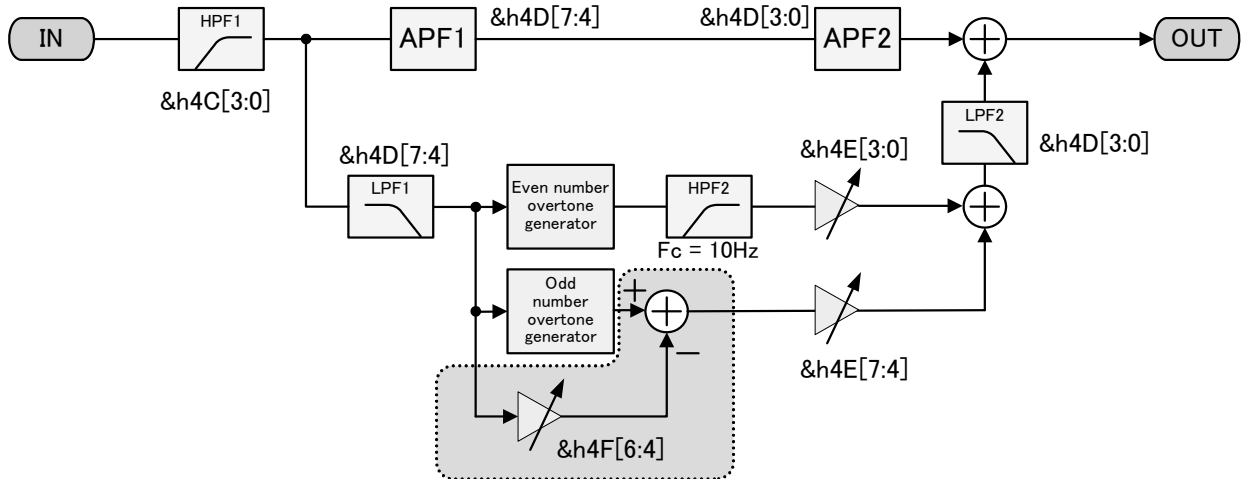

Pseudo bass ON/OFF

The effect of the bass emphasis of a pseudo bass (overtone) is used.

Default = 0

Select Address	Value	Explanation of operation
&h4C [7]	0	Not use pseudo bass (overtone)
	1	Use pseudo bass (overtone)

Setting of pseudo bass input HPF1 (The super-low element of the fundamental harmonic input to the overtone generator can be cut.)

Default = 0h

Select Address	Explanation of operation			
&h4C [3:0]	Command	Frequency	Command	Frequency
	0	OFF	8	82Hz
	1	22Hz	9	100Hz
	2	27Hz	A	120Hz
	3	33Hz	B	150Hz
	4	39Hz	C	180Hz
	5	47Hz	D	220Hz
	6	56Hz	E	270Hz
	7	68Hz	F	330Hz

Pseudo bass input LPF1 selection. (The low element of the fundamental harmonic that the overtone generator inputs is extracted)

Default = 0h

Select Address	Explanation of operation																																							
&h4D [7:4]	<table border="1"> <thead> <tr> <th>Command</th> <th>Frequency</th> <th>Command</th> <th>Frequency</th> </tr> </thead> <tbody> <tr><td>0</td><td>68Hz</td><td>8</td><td>330Hz</td></tr> <tr><td>1</td><td>82Hz</td><td>9</td><td>390Hz</td></tr> <tr><td>2</td><td>100Hz</td><td>A</td><td>470Hz</td></tr> <tr><td>3</td><td>120Hz</td><td>B</td><td>560Hz</td></tr> <tr><td>4</td><td>150Hz</td><td>C</td><td>680Hz</td></tr> <tr><td>5</td><td>180Hz</td><td>D</td><td>820Hz</td></tr> <tr><td>6</td><td>220Hz</td><td>E</td><td>1000Hz</td></tr> <tr><td>7</td><td>270Hz</td><td>F</td><td>1200Hz</td></tr> </tbody> </table>				Command	Frequency	Command	Frequency	0	68Hz	8	330Hz	1	82Hz	9	390Hz	2	100Hz	A	470Hz	3	120Hz	B	560Hz	4	150Hz	C	680Hz	5	180Hz	D	820Hz	6	220Hz	E	1000Hz	7	270Hz	F	1200Hz
Command	Frequency	Command	Frequency																																					
0	68Hz	8	330Hz																																					
1	82Hz	9	390Hz																																					
2	100Hz	A	470Hz																																					
3	120Hz	B	560Hz																																					
4	150Hz	C	680Hz																																					
5	180Hz	D	820Hz																																					
6	220Hz	E	1000Hz																																					
7	270Hz	F	1200Hz																																					

LPF2 setting for 2 overtones and 3 overtones. (The harmonic content of the overtone is suppressed with this LPF)

Default = 0h

Select Address	Explanation of operation																																							
&h4D [3:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>Frequency</th> <th>Command</th> <th>Frequency</th> </tr> </thead> <tbody> <tr><td>0</td><td>68Hz</td><td>8</td><td>330Hz</td></tr> <tr><td>1</td><td>82Hz</td><td>9</td><td>390Hz</td></tr> <tr><td>2</td><td>100Hz</td><td>A</td><td>470Hz</td></tr> <tr><td>3</td><td>120Hz</td><td>B</td><td>560Hz</td></tr> <tr><td>4</td><td>150Hz</td><td>C</td><td>680Hz</td></tr> <tr><td>5</td><td>180Hz</td><td>D</td><td>820Hz</td></tr> <tr><td>6</td><td>220Hz</td><td>E</td><td>1000Hz</td></tr> <tr><td>7</td><td>270Hz</td><td>F</td><td>1200Hz</td></tr> </tbody> </table>				Command	Frequency	Command	Frequency	0	68Hz	8	330Hz	1	82Hz	9	390Hz	2	100Hz	A	470Hz	3	120Hz	B	560Hz	4	150Hz	C	680Hz	5	180Hz	D	820Hz	6	220Hz	E	1000Hz	7	270Hz	F	1200Hz
Command	Frequency	Command	Frequency																																					
0	68Hz	8	330Hz																																					
1	82Hz	9	390Hz																																					
2	100Hz	A	470Hz																																					
3	120Hz	B	560Hz																																					
4	150Hz	C	680Hz																																					
5	180Hz	D	820Hz																																					
6	220Hz	E	1000Hz																																					
7	270Hz	F	1200Hz																																					

Additive gain setting for 3 overtones

When the input of the fundamental wave component is assumed to be 0dB, the output of the fundamental wave component from the overtone generator becomes -3dB.

(Output = Input - 3dB)

Default = 7h

Select Address	Explanation of operation																																							
&h4E [7:4]	<table border="1"> <thead> <tr> <th>Command</th> <th>Gain</th> <th>Command</th> <th>Gain</th> </tr> </thead> <tbody> <tr><td>0</td><td>-∞</td><td>8</td><td>7dB</td></tr> <tr><td>1</td><td>0dB</td><td>9</td><td>8dB</td></tr> <tr><td>2</td><td>1dB</td><td>A</td><td>9dB</td></tr> <tr><td>3</td><td>2dB</td><td>B</td><td>10dB</td></tr> <tr><td>4</td><td>3dB</td><td>C</td><td>11dB</td></tr> <tr><td>5</td><td>4dB</td><td>D</td><td>12dB</td></tr> <tr><td>6</td><td>5dB</td><td>E</td><td>13dB</td></tr> <tr><td>7</td><td>6dB</td><td>F</td><td>14dB</td></tr> </tbody> </table>				Command	Gain	Command	Gain	0	-∞	8	7dB	1	0dB	9	8dB	2	1dB	A	9dB	3	2dB	B	10dB	4	3dB	C	11dB	5	4dB	D	12dB	6	5dB	E	13dB	7	6dB	F	14dB
Command	Gain	Command	Gain																																					
0	-∞	8	7dB																																					
1	0dB	9	8dB																																					
2	1dB	A	9dB																																					
3	2dB	B	10dB																																					
4	3dB	C	11dB																																					
5	4dB	D	12dB																																					
6	5dB	E	13dB																																					
7	6dB	F	14dB																																					

Additive gain setting for 2 overtones

When the input of the fundamental wave component is assumed to be 0dB, the output from the overtone generator becomes -6dB.

(Output = Input - 6dB)

Default = 7h

Select Address	Explanation of operation			
&h4E [3:0]	Command	Gain	Command	Gain
	0	-∞	8	1dB
	1	-6dB	9	2dB
	2	-5dB	A	3dB
	3	-4dB	B	4dB
	4	-3dB	C	5dB
	5	-2dB	D	6dB
	6	-1dB	E	7dB
7	0dB	F	8dB	


Subtraction gain setting for 3 overtones (recommendation value: -6dB or -4dB)

Default = 5h

Select Address	Explanation of operation			
&h4F [6:4]	Command	Gain	Command	Gain
	0	-∞	4	-6dB
	1	-12dB	5	-4dB
	2	-10dB	6	-2dB
	3	-8dB	7	0dB

Setting at blind time of odd-order overtone generation circuit

The high frequency signal that cannot be attenuated with LPF is included in the LPF1 outgoing signal input to the overtone generation circuit. It is set the blind time to do an unnecessary zero-cross point masking.

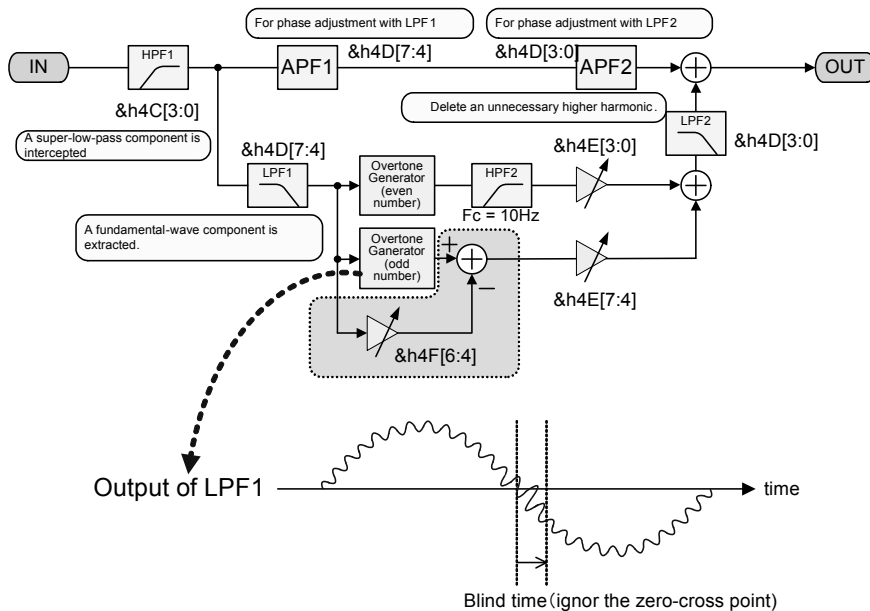

Default = 1

Select Address	Value	Explanation of operation
&h4F [1:0]	0	1.25ms (LPF1 ∅ Fc = 47Hz to 180Hz)
	1	0.625ms (LPF1 ∅ Fc = 220Hz to 390Hz)
	2	0.3125ms (LPF1 ∅ Fc = 470Hz to 800Hz)

1-7. Parametric Equalizer

In this IC, the following block has the feature of the parametric equalizer.

16Band BQ, Crossover filter of 2Band DRC block and BQ of the smooth transition.

The shape is used peaking filter, low shelf filter, high shelf filter, lowpass filter, highpass filter and all path filter.

The setting is to choose F, Q, Gain, and changes into the coefficient of the digital filter in the IC and it transfers to the coefficient RAM. 16Band BQ have the soft transfer feature. Incidentally, the detailed order of the parameter setting refer to the following PEQ setting method.

The coefficient RAM which stores a filter coefficient owns four banks and the command can choose it. The coefficient RAM for the parametric equalizer can set a coefficient to the bank-memory but the bank-memory during sound reconstruction. But when a coefficient is written to BQ for smooth transition, write a coefficient to same bank for sound reconstruction.

Select of bank memory for coefficient RAM used to reproduce

Default = 0h

Select Address	Value	Explanation of operation
&h60[3:2]	0	BANK1
	1	BANK2
	2	BANK3
	3	BANK4

Select of bank memory used to set coefficient

Default = 0h

Select Address	Value	Explanation of operation
&h60 [1:0]	0	BANK1
	1	BANK2
	2	BANK3
	3	BANK4

L/R independence selection

Default = 0h

Select Address	Value	Explanation of operation
&h60 [4]*	0	L/R same
	1	L/R independence (Usable only BANK1、BANK2)

*Notes when &h60 4 is set

Please set all the parametric equalizers setting again, when you change the setting of &h60[4].

The re-setting parametric equalizers are 18 parametric equalizers of BQ1-16, DRC APF, and DRC HPF.

And, please set all BANK setting again, since the placement of BANK is changed, too.

Sampling frequency selection of coefficient automatic calculated circuit

Default = 0h

Select Address	Value	Explanation of operation
&h50 [1:0]	0	For 48kHz
	1	For 44.1kHz
	2	For 32kHz

Select of PEQ setting

Only when choose 60[4]=1

Default = 0h

Select Address	Value	Explanation of operation
&h51 [7]	0	Lch
	1	Rch

When it is &h60[4]=1, and uses the L/R independence setting, and uses smooth transition,

Please synchronize Lch/Rch setting of &h51[7] and channel setting of &h 53[5:4].

Example 1 : When it set Lch at independently L/R: &h 53[5:4] =1 in case of &h60[4]=1 and &h51[7]=0.

Example 2 : When it set Rch at independently L/R: &h 53[5:4] =2 in case of &h60[4]=1 and &h51[7]=1.

Default = 00h

Select Address	Explanation of operation							
	Command	PEQ	Command	PEQ	Command	PEQ	Command	PEQ
&h51[4 : 0]	0	16Band BQ (1)	8	16Band BQ (9)	10	2Band DRC HPF	18	-
	1	16Band BQ (2)	9	16Band BQ (10)	11	2Band DRC APF	19	-
	2	16Band BQ (3)	A	16Band BQ (11)	12	-	1A	-
	3	16Band BQ (4)	B	16Band BQ (12)	13	-	1B	-
	4	16Band BQ (5)	C	16Band BQ (13)	14	-	1C	-
	5	16Band BQ (6)	D	16Band BQ (14)	15	-	1D	-
	6	16Band BQ (7)	E	16Band BQ (15)	16	-	1E	-
	7	16Band BQ (8)	F	16Band BQ (16)	17	-	1F	-

16Band BQ : BQ is Bi-Quad-type digital filter.

2 Band DRC HPF/APF : The crossover filter of 2Band DRC block should be set to high path filter and all pass filter.

Select of filter type

Default = 0h

Select Address	Value	Explanation of operation
&h52[2:0]	0	Peaking Filter
	1	Peaking Filter (Equal Q type)
	2	Low Shelf Filter
	3	High Shelf Filter
	4	Low Pass Filter
	5	High Pass Filter
	6	All Pass Filter
	7	Filter through

Select of smooth transition

Default = 0h

Select Address	Value	Explanation of operation
&h53 [6]	0	Use smooth transition
	1	Not use smooth transition

Select channel of smooth transition

Default = 0h

Select Address	Value	Explanation of operation
&h53 [5:4]	0	Lch and Rch
	1	Lch
	2	Rch

Setting of smooth transition time

Default = 3h

Select Address	Value	Explanation of operation
&h53 [3:2]	0	2.7ms
	1	5.3ms
	2	10.7ms
	3	21.3ms

Setting of smooth transition wait time

Default = 0h

Select Address	Value	Explanation of operation
&h53 [1:0]	0	2.7ms
	1	5.3ms
	2	10.7ms
	3	21.3ms

Setting of frequency (F₀)

Default = 0Eh

Select Address	Explanation of operation															
&h54 [5:0]	Command	Frequency	Command	Frequency	Command	Frequency	Command	Frequency	Command	Frequency	Command	Frequency	Command	Frequency	Command	Frequency
	00	20Hz	08	50Hz	10	125Hz	18	315Hz	20	800Hz	28	2kHz	30	5kHz	38	12.5kHz
	01	22Hz	09	56Hz	11	140Hz	19	350Hz	21	900Hz	29	2.2kHz	31	5.6kHz	39	14kHz
	02	25Hz	0A	63Hz	12	160Hz	1A	400Hz	22	1kHz	2A	2.5kHz	32	6.3kHz	3A	16kHz
	03	28Hz	0B	70Hz	13	180Hz	1B	450Hz	23	1.1kHz	2B	2.8kHz	33	7kHz	3B	18kHz
	04	32Hz	0C	80Hz	14	200Hz	1C	500Hz	24	1.25kHz	2C	3.15kHz	34	8kHz	3C	20kHz
	05	35Hz	0D	90Hz	15	220Hz	1D	560Hz	25	1.4kHz	2D	3.5kHz	35	9kHz	3D	-
	06	40Hz	0E	100Hz	16	250Hz	1E	630Hz	26	1.6kHz	2E	4kHz	36	10kHz	3E	-
07	45Hz	0F	110Hz	17	280Hz	1F	700Hz	27	1.8kHz	2F	4.5kHz	37	11kHz	3F	-	

Setting of quality factor (Q)

Default = 13h

Select Address	Explanation of operation							
&h55 [4:0]	Command	Q	Command	Q	Command	Q	Command	Q
	00	0.33	08	1.2	10	5.6	18	1.932
	01	0.39	09	1.5	11	6.8	19	0.51
	02	0.47	0A	1.8	12	8.2	1A	0.601
	03	0.56	0B	2.2	13	0.707	1B	0.9
	04	0.68	0C	2.7	14	0.541	1C	2.563
	05	0.75	0D	3.3	15	1.307	1D	-
	06	0.82	0E	3.9	16	0.518	1E	-
07	1.0	0F	4.7	17	0.707	1F	-	

Second butterworth is set to 13h. (BQx1) Fourth butterworth is set to 14h, 15h. (BQx2)

Sixth butterworth is set to 16h, 17h, 18h. (BQx3) Eighth butterworth is set to 19h, 1Ah, 1Bh, 1Ch. (BQx4)

Setting of gain (Gain)

Default = 40h

Select Address	Explanation of operation	
&h56 [6:0]	Command	Gain
	1C	-18dB
	⋮	⋮
	38	-1dB
	39	-0.5dB
	40	0dB
	41	+0.5dB
	42	+1dB
	⋮	⋮
	64	+18dB

When the each coefficient (b₀,b₁,b₂,a₁,a₂) exceeds ±4, it is not possible to set it.

Transfer start setting to coefficient RAM

Default = 0

Select Address	Value	Explanation of operation
&h57 [0]	0	Transfer stop
	1	Transfer start (After transferring is completed, it becomes 0 by the automatic operation.)

Setting of smooth transition start

Default = 0

Select Address	Value	Explanation of operation
&h58 [0]	0	Stop the smooth transition operation
	1	Start the smooth transition operation (After the transition is completed, it becomes 0 by the automatic operation)

* This register cannot read-out.

Read-out smooth transition status

Select Address	Explanation of operation
&h59 [0]	"1" is read while software is changing. "0" is read usually.

[attention] The data of coefficient RAM can be read. Set values such as F, Q, and Gain cannot be read.

【Example of coefficient setting procedure 1】

Ex) Set $f_c=1\text{kHz}$, $Q=1.0$, $\text{Gain}=+6\text{dB}$, and Filter type=Peaking Filter to 16Band BQ1 by using the soft transition function.
Sampling frequency: $f_s=48\text{kHz}$, Smooth transition time: 21.3ms, Smooth transition wait time: 2.7ms Bank memory: BANK1 ,L/R same

- 1) &h60[4]=0h :Select L/R same
- 2) &h60[1:0] = 0h :Select BANK1(for writing)
&h60[3:2] = 0h :Select BANK1(for reading)
- 3) &h50[1:0] = 0h :Select sampling frequency to 48kHz
- 4) &h51[4:0] = 00h :Select 16 Band BQ1
- 5) &h52[2:0] = 00h :Select Peaking Filter
- 6) &h53[7:0] = 0Ch
&h53[6] = 0h : Use smooth transition
&h53[5:4] = 0h :Select L/R smooth transition
&h53[3:2] = 3h :Set smooth transition time to 21.3ms
&h53[1:0] = 0h :Set smooth transition wait time to 2.7ms
- 7) &h54[5:0] = 22h :Set frequency to 1kHz (f_0)
- 8) &h55[4:0] = 07h : Set quality factor to 1.0
- 9) &h56 [6:0] = 4Ch : Set gain level to +6dB
- 10) &h57[0] = 1h : Transferring start to coefficient RAM for smooth transition
(After transferring is completed, it is cleared automatically to 0h.)
- 11) Even the transferring completion waits for about 150 μ s.
- 12) &h58[0] = 1h : Smooth transition start
(After smooth transition is completed, it is cleared automatically to 0h.)
- 13) About 24ms (21.3ms + 2.7ms) stands by to the smooth transition completion. Or, it stands by until 0 is read, and command &h59[0] is cleared to 0h.

【Example of coefficient setting procedure 2】

Ex) Set $f_c=200\text{Hz}$, $Q=0.707$ and Filter type=Low Pass Filter to 16Band BQ2 by not using the soft transition function.
Sampling frequency: $f_s=44.1\text{kHz}$, Bank memory: BANK1 ,L/R same

- 1) &h60[4] = 0h :Select L/R same
- 2) &h60[1:0] = 0h :Select BANK1(for writing)
- 3) &h50[1:0] = 1h :Select sampling frequency to 44.1kHz
- 4) &h51[4:0] = 01h :Select 16 Band BQ2
- 5) &h52[2:0] = 04h :Select Low Pass Filter
- 6) &h53[6] = 1h : Not Use smooth transition
- 7) &h54[5:0] = 14h :Set frequency to 200Hz (f_0)
- 8) &h55[4:0] = 17h : Set quality factor to 0.707
- 9) &h56[6:0] = 40h : Because Low Pass Filter was selected, the setting of the gain can be omitted.
- 10) &h57[0] = 1h : Transferring start to coefficient RAM for smooth transition
(After transferring is completed, it is cleared automatically to 0h.)
- 11) Even the transferring completion waits for about 150 μ s.

【Example of coefficient setting procedure 3】

Ex) Set $f_c=2\text{kHz}$, $Q=0.56$, and Filter type=Low Pass Filter to the ch. L of 16Band BQ3, and Set $f_c=3.15\text{kHz}$, $Q=0.68$, and Filter type=High Pass Filter to the ch. R of 16Band BQ3 by using the soft transition function.

Sampling frequency: $f_s=48\text{kHz}$, Smooth transition time: 21.3ms, Smooth transition wait time: 2.7ms Bank memory: BANK1 ,L/R independence.

- 1)&h60[4]=1h :Select L/R independence
- 2)&h60[1:0]=0h : Select BANK1(for writing)
- &h60[3:2]=0h : Select BANK1(for reading)
- 3)&h50[1:0]=0h : Select sampling frequency to 48kHz
- 4)&h51[7:0]=02h
- &h51[7]=0h :Select ch. L
- &h51[4:0]=02h :Select 16Band BQ3
- 5)&h52[2:0]=04h :Select Low Pass Filter
- 6)&h53[7:0]=0Ch
- &h53[6]=0h :Use smooth transition
- &h53[5:4]=0h :Select L/R smooth transition
- &h53[3:2]=3h :Set smooth transition time to 21.3ms
- &h53[1:0]=0h :Set smooth transition wait time to 2.7ms
- 7)&h54[5:0]=28h :Set frequency to 2kHz (f_0)
- 8)&h55[4:0]=03h : Set quality factor to 0.56
- 9)&h56[6:0]=40h : Because Low Pass Filter was selected, the setting of the gain can be omitted.
- 10)&h57[0]=1h : Transferring start to coefficient RAM for smooth transition
(After transferring is completed, it is cleared automatically to 0h.)
- 11) Even the transferring completion waits for about 150 μ s.
- 12)&h51[7:0]=82h
- &h51[7]=1h :Select ch. R
- &h51[4:0]=02h :Select 16Band BQ3
- 13)&h52[2:0]=05h :Select High Pass Filter
- 14)&h54[5:0]=2Ch :Set frequency to 3.15kHz (f_0)
- 15)&h55[4:0]=04h : Set quality factor to 0.68
- 16)&h56[6:0]=40h : Because High Pass Filter was selected, the setting of the gain can be omitted.0
- 17)&h57[0]=1h : Transferring start to coefficient RAM for smooth transition
(After transferring is completed, it is cleared automatically to 0h.)
- 18) Even the transferring completion waits for about 150 μ s.
- 19)&h58[0]=1h : Smooth transition start
(After smooth transition is completed, it is cleared automatically to 0h.)
- 20) About 24ms (21.3ms + 2.7ms) stands by to the smooth transition completion. Or, it stands by until 0 is read, and command &h59[0] is cleared to 0h.

1-8. Volume

Volume is from +24dB to -103dB, and can be selected by the step of 0.125dB. At the time of switching of Volume, smooth transition is performed. Soft transition duration is optional with the command. It becomes the following formula at the transition from AdB to BdB. C is smooth transition duration selected by &h15[7:6] command.

$$\text{Transition time} = \left| \left(10^{\frac{A}{20}} - 10^{\frac{B}{20}} \right) * C \text{ ms} \right|$$

Setting of soft transition time

Default = 0

Select Address	Value	Explanation of operation
&h15 [7:6]	0	21.3ms
	1	42.7ms
	2	85.3ms

Setting of volume

Default = FFh

Select Address	Explanation of operation																				
&h11 [7:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>Gain</th> </tr> </thead> <tbody> <tr> <td>00</td> <td>+24dB</td> </tr> <tr> <td>01</td> <td>+23.5dB</td> </tr> <tr> <td>⋮</td> <td>⋮</td> </tr> <tr> <td>30</td> <td>0dB</td> </tr> <tr> <td>31</td> <td>-0.5dB</td> </tr> <tr> <td>32</td> <td>-1dB</td> </tr> <tr> <td>⋮</td> <td>⋮</td> </tr> <tr> <td>FE</td> <td>-103dB</td> </tr> <tr> <td>FF</td> <td>-∞</td> </tr> </tbody> </table>	Command	Gain	00	+24dB	01	+23.5dB	⋮	⋮	30	0dB	31	-0.5dB	32	-1dB	⋮	⋮	FE	-103dB	FF	-∞
Command	Gain																				
00	+24dB																				
01	+23.5dB																				
⋮	⋮																				
30	0dB																				
31	-0.5dB																				
32	-1dB																				
⋮	⋮																				
FE	-103dB																				
FF	-∞																				

Setting of fine volume

This command becomes effective by sending the following command after setting. When using this command, it is possible to set a volume in 0.125dB carving.

Setting of fine volume

Default = 0h

Select Address	Value	Explanation of operation
&h10 [1:0]	0	0dB
	1	-0.125dB
	2	-0.25dB
	3	-0.375dB

【Note1】

It is possible to use with the 0.5-dB step in changing only &h11[7:0] when &h10[1:0]=0.

【Note2】

It is possible to use with the 0.125-dB step in setting both &h10[1:0] and &h11[7:0].

In case of &h10[1:0]=0, it becomes the set value of &h11[7:0].

In case of &h10[1:0]=1, it becomes the -0.125dB set value of &h11[7:0].

In case of &h10[1:0]=2, it becomes the -0.25dB set value of &h11[7:0].

In case of &h10[1:0]=3, it becomes the -0.375dB set value of &h11[7:0].

Because it is fixed by the transfer of &h11 in any case, the soft transfer can be beforehand begun in the set value for the direct following of the purpose in setting &h11 after setting in &h10.



1-9. Balance

As for balance, it is possible to be attenuated at 1dB step width from volume setting value. The switch operation becomes a smooth transition. When the balance changes, smooth transition is done. Smooth transition duration becomes the same formula as the volume.


Setting of L/R balance

Default = 80h


Select Address	Explanation of operation		
&h12 [7:0]	Command	Lch	Rch
	00	0dB	-∞
	01	0dB	-126dB
	:	:	:
	7E	0dB	-1dB
	7F	0dB	0dB
	80	0dB	0dB
	81	-1dB	0dB
	:	:	:
	FE	-126dB	0dB
	FF	-∞	0dB

1-10. 2 band DRC


This DRC is used in order to prevent speaker protection and the clip output of a large audio signal. In addition to two bands of DRC for low and high frequency, there is DRC for the whole frequency in the latter part. Non clip output is possible. DRC for low frequency band and DRC for high frequency band can set up two threshold value levels. Moreover, it is possible to also change slope.

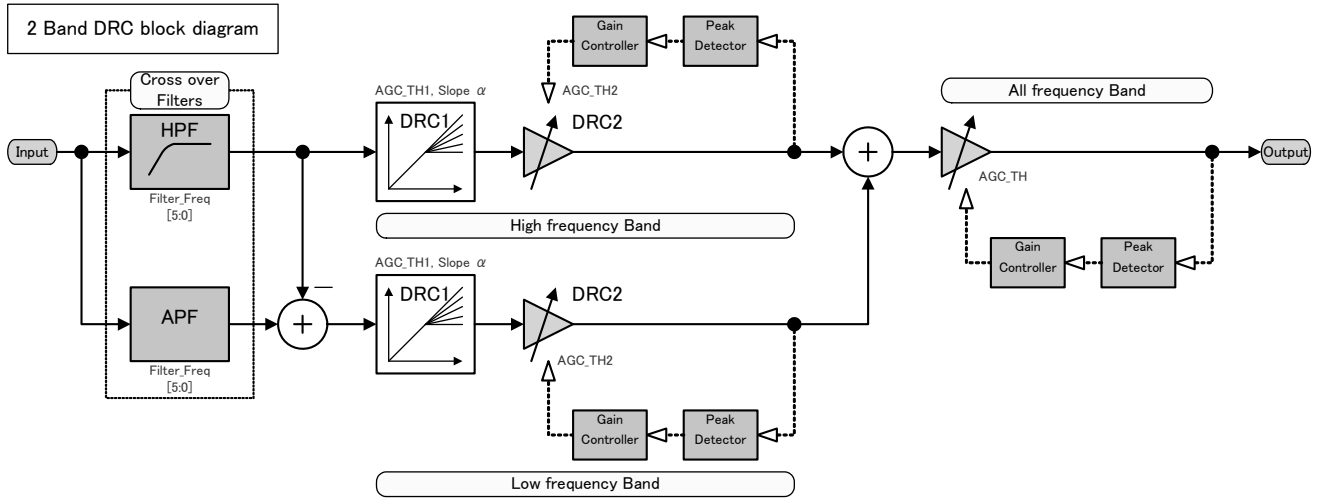

DRC transition figure

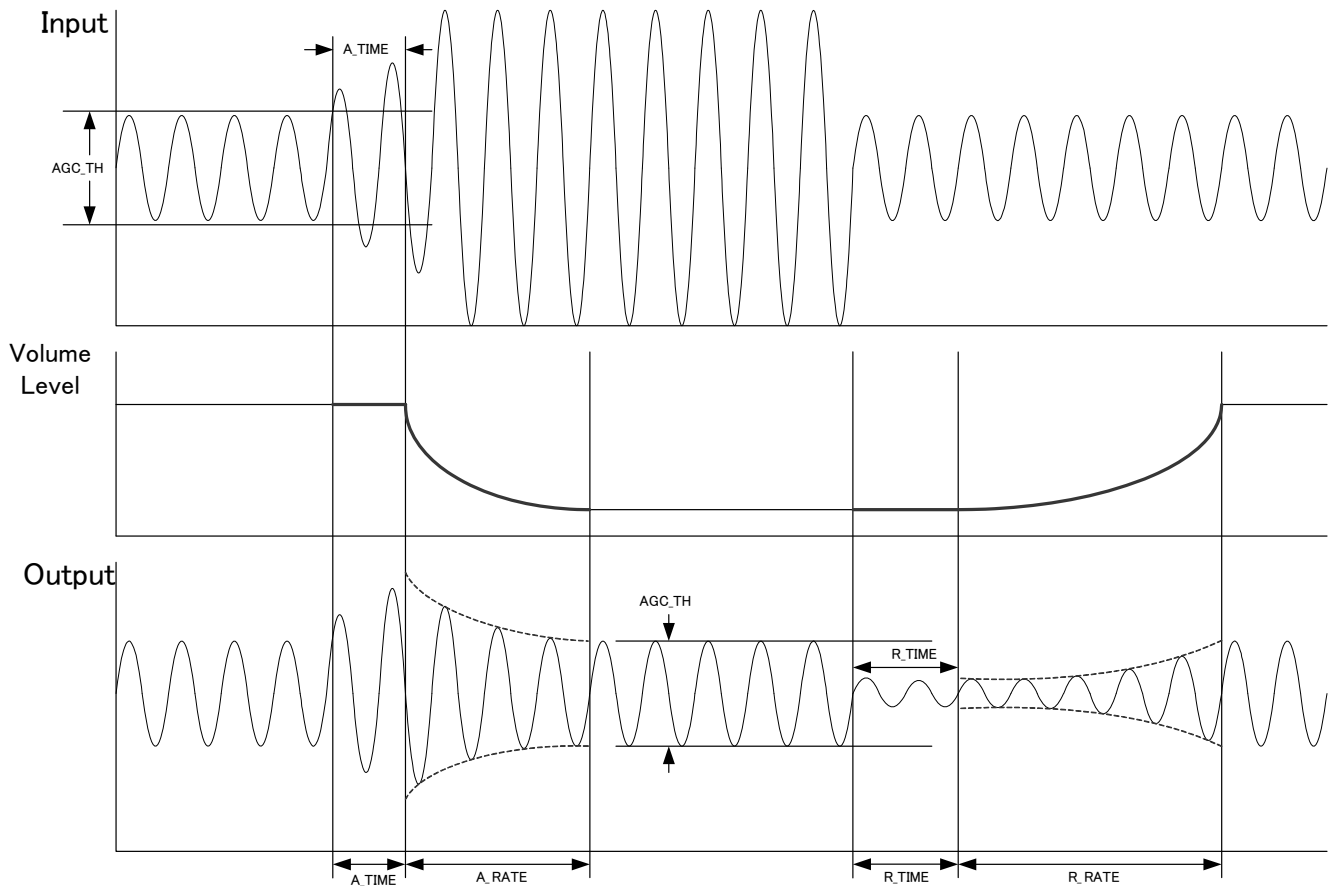

DRC input-and-output gain characteristics

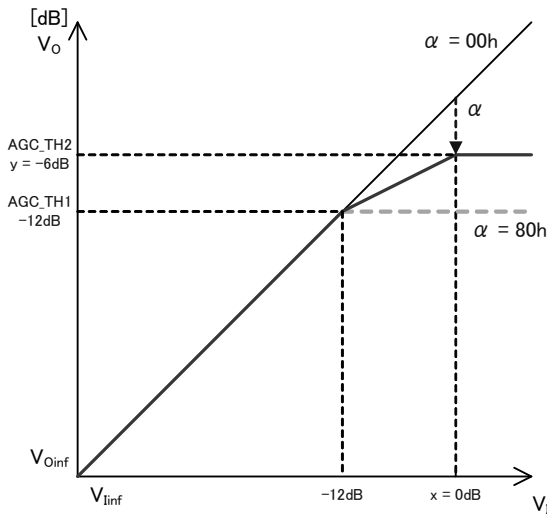

The formula which asks for Slope alpha is described below.

Alpha changes into 8bit Hex data of the complement of 2 the value calculated by calculation.

$$\alpha = \frac{10^{\frac{y}{20}} - 10^{\frac{x}{20}}}{10^{\frac{TH}{20}} - 10^{\frac{x}{20}}} \times 128$$

TH is AGC_TH1. x is input level. y is output level.


Ex) It asks for alpha at the time of AGC_TH1 = -12dB, x = 0dB y = -6dB

$$\alpha = \frac{10^{\frac{-6}{20}} - 10^{\frac{0}{20}}}{10^{\frac{-12}{20}} - 10^{\frac{0}{20}}} \times 128$$

$$\alpha = 85.266 \rightarrow 55_H$$

55_H calculated is set as &h25 or &h2A

Volume Curve

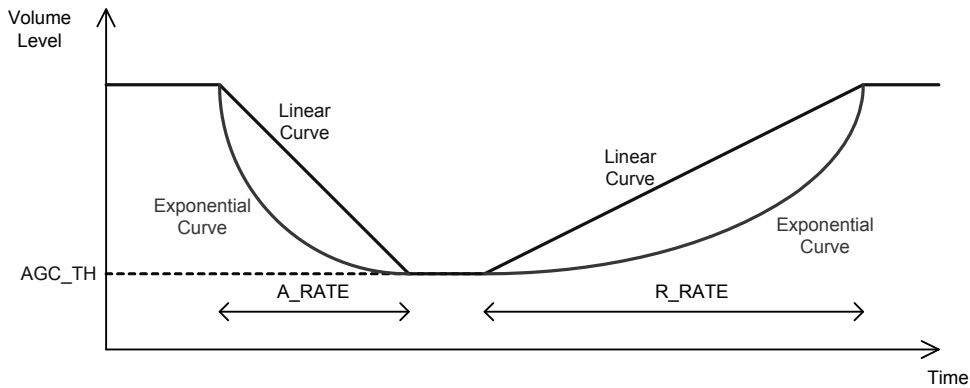

ON/OFF setting of DRC for all frequency band.

OFF is through output.

Default = 1

Select Address	Value	Explanation of operation
&h20 [3]	0	Not use
	1	Use

ON/OFF setting of DRC1 for high frequency band. (DRC which can perform slope variable)

OFF is through output.

Default = 1

Select Address	Value	Explanation of operation
&h20 [7]	0	Not use
	1	Use

ON/OFF setting of DRC2 for high frequency band. (Compressor)

OFF is through output.

Default = 1

Select Address	Value	Explanation of operation
&h20 [6]	0	Not use
	1	Use

ON/OFF setting of DRC1 for low frequency band. (DRC which can perform slope variable)

OFF is through output.

Default = 1

Select Address	Value	Explanation of operation
&h20 [5]	0	Not use
	1	Use

ON/OFF setting of DRC2 for low frequency band. (Compressor)

OFF is through output.

Default = 1

Select Address	Value	Explanation of operation
&h20 [4]	0	Not use
	1	Use

The volume curve at the time of an attack (A_RATE) is selected.

Default = 0

Select Address	Value	Explanation of operation
&h21[7]	0	Linear curve
	1	Exponential curve

The volume curve at the time of a release (R_RATE) is selected.

Default = 0

Select Address	Value	Explanation of operation
&h21 [6]	0	Linear curve
	1	Exponential curve

The choice of the DRC composition

It uses a standard in 2Band DRC but it is possible to use as 1Band DRC, too.

To make the composition of 1Band DRC, it chooses through setting in HPF and APF of the crossover filter.

【Procedure】

- 1) &h51 = 10h : Select HPF of the 2Band DRC.
- 2) &h52 = 07h : Select Filter through.
- 3) &h57 = 01h : It starts a transfer to the coefficient RAM.
- 4) &h51 = 11h : Select APF of 2Band DRC.
- 5) &h52 = 07h : Select Filter through.
- 6) &h57 = 01h : It starts a transfer to the coefficient RAM.

To set the crossover filter which divides the high frequency band and the low frequency band of 2Band DRC, therefore, it is referred to the chapter 1-7.

Setting of DRC AGC_TH for all bands.

When using according to either of the DRC for the high area or the DRC for the low area bigger AGC_TH setting, the distortion in the crossover point can be suppressed.

Default = 40h

Select Address	Explanation of operation																
&h38 [6:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>Threshold</th> </tr> </thead> <tbody> <tr> <td>00</td> <td>-32dB</td> </tr> <tr> <td>⋮</td> <td>⋮</td> </tr> <tr> <td>3F</td> <td>-0.5dB</td> </tr> <tr> <td>40</td> <td>0dB</td> </tr> <tr> <td>41</td> <td>+0.5dB</td> </tr> <tr> <td>⋮</td> <td>⋮</td> </tr> <tr> <td>58</td> <td>+12dB</td> </tr> </tbody> </table>	Command	Threshold	00	-32dB	⋮	⋮	3F	-0.5dB	40	0dB	41	+0.5dB	⋮	⋮	58	+12dB
Command	Threshold																
00	-32dB																
⋮	⋮																
3F	-0.5dB																
40	0dB																
41	+0.5dB																
⋮	⋮																
58	+12dB																

Setting of DRC A_RATE for all bands. (The compression curve transition time in attack)

Default = 3h

Select Address	Explanation of operation																				
&h3A [6:4]	<table border="1"> <thead> <tr> <th>Command</th> <th>A_RATE time</th> <th>Command</th> <th>A_RATE time</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>1ms</td> <td>4</td> <td>5ms</td> </tr> <tr> <td>1</td> <td>2ms</td> <td>5</td> <td>10ms</td> </tr> <tr> <td>2</td> <td>3ms</td> <td>6</td> <td>20ms</td> </tr> <tr> <td>3</td> <td>4ms</td> <td>7</td> <td>40ms</td> </tr> </tbody> </table>	Command	A_RATE time	Command	A_RATE time	0	1ms	4	5ms	1	2ms	5	10ms	2	3ms	6	20ms	3	4ms	7	40ms
Command	A_RATE time	Command	A_RATE time																		
0	1ms	4	5ms																		
1	2ms	5	10ms																		
2	3ms	6	20ms																		
3	4ms	7	40ms																		

Setting of DRC R_RATE for all bands. (The expansion curve transition time in release)

Default = Bh

Select Address	Explanation of operation																																				
&h3A [3:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>R_RATE time</th> <th>Command</th> <th>R_RATE time</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0.125s</td> <td>8</td> <td>2s</td> </tr> <tr> <td>1</td> <td>0.1825s</td> <td>9</td> <td>2.5s</td> </tr> <tr> <td>2</td> <td>0.25s</td> <td>A</td> <td>3s</td> </tr> <tr> <td>3</td> <td>0.5s</td> <td>B</td> <td>4s</td> </tr> <tr> <td>4</td> <td>0.75s</td> <td>C</td> <td>5s</td> </tr> <tr> <td>5</td> <td>1s</td> <td>D</td> <td>6s</td> </tr> <tr> <td>6</td> <td>1.25s</td> <td>E</td> <td>7s</td> </tr> <tr> <td>7</td> <td>1.5s</td> <td>F</td> <td>8s</td> </tr> </tbody> </table>	Command	R_RATE time	Command	R_RATE time	0	0.125s	8	2s	1	0.1825s	9	2.5s	2	0.25s	A	3s	3	0.5s	B	4s	4	0.75s	C	5s	5	1s	D	6s	6	1.25s	E	7s	7	1.5s	F	8s
Command	R_RATE time	Command	R_RATE time																																		
0	0.125s	8	2s																																		
1	0.1825s	9	2.5s																																		
2	0.25s	A	3s																																		
3	0.5s	B	4s																																		
4	0.75s	C	5s																																		
5	1s	D	6s																																		
6	1.25s	E	7s																																		
7	1.5s	F	8s																																		

Setting of DRC A_TIME for all bands. (Setting of detection time for attack operation)

Default = 1h

Select Address	Explanation of operation																																				
&h3B [7:4]	<table border="1"> <thead> <tr> <th>Command</th> <th>A_TIME time</th> <th>Command</th> <th>A_TIME time</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0ms</td> <td>8</td> <td>6ms</td> </tr> <tr> <td>1</td> <td>0.5ms</td> <td>9</td> <td>7ms</td> </tr> <tr> <td>2</td> <td>1ms</td> <td>A</td> <td>8ms</td> </tr> <tr> <td>3</td> <td>1.5ms</td> <td>B</td> <td>9ms</td> </tr> <tr> <td>4</td> <td>2ms</td> <td>C</td> <td>10ms</td> </tr> <tr> <td>5</td> <td>3ms</td> <td>D</td> <td>20ms</td> </tr> <tr> <td>6</td> <td>4ms</td> <td>E</td> <td>30ms</td> </tr> <tr> <td>7</td> <td>5ms</td> <td>F</td> <td>40ms</td> </tr> </tbody> </table>	Command	A_TIME time	Command	A_TIME time	0	0ms	8	6ms	1	0.5ms	9	7ms	2	1ms	A	8ms	3	1.5ms	B	9ms	4	2ms	C	10ms	5	3ms	D	20ms	6	4ms	E	30ms	7	5ms	F	40ms
Command	A_TIME time	Command	A_TIME time																																		
0	0ms	8	6ms																																		
1	0.5ms	9	7ms																																		
2	1ms	A	8ms																																		
3	1.5ms	B	9ms																																		
4	2ms	C	10ms																																		
5	3ms	D	20ms																																		
6	4ms	E	30ms																																		
7	5ms	F	40ms																																		


Setting of DRC R_TIME for all bands. (Setting of detection time for release operation)

Default = 3h

Select Address	Explanation of operation																				
&h3B [2:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>R_TIME time</th> <th>Command</th> <th>R_TIME time</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>5ms</td> <td>4</td> <td>100ms</td> </tr> <tr> <td>1</td> <td>10ms</td> <td>5</td> <td>200ms</td> </tr> <tr> <td>2</td> <td>25ms</td> <td>6</td> <td>300ms</td> </tr> <tr> <td>3</td> <td>50ms</td> <td>7</td> <td>400ms</td> </tr> </tbody> </table>	Command	R_TIME time	Command	R_TIME time	0	5ms	4	100ms	1	10ms	5	200ms	2	25ms	6	300ms	3	50ms	7	400ms
Command	R_TIME time	Command	R_TIME time																		
0	5ms	4	100ms																		
1	10ms	5	200ms																		
2	25ms	6	300ms																		
3	50ms	7	400ms																		

Slope (α) setting of DRC1 for high frequency band

Default = 80h

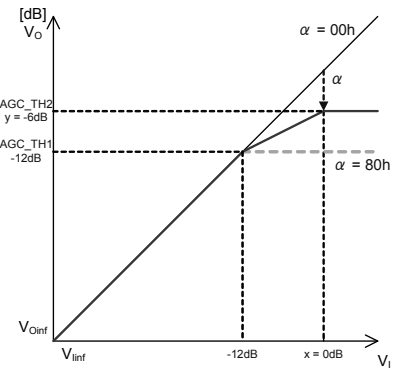Select Address	Explanation of operation
&h29 [7:0]	 <p>The formula which asks for Slope alpha is described below. Alpha changes into 8bit Hex data of the complement of 2 the value calculated by calculation.</p> $\alpha = \frac{10^{\frac{y}{20}} - 10^{\frac{x}{20}}}{10^{\frac{TH}{20}} - 10^{\frac{0}{20}}} \times 128$ <p>TH is AGC_TH1. x is input level. y is output level. Ex) It asks for alpha at the time of AGC_TH1 = -12dB, x = 0dB y = -6dB</p> $\alpha = \frac{10^{\frac{-6}{20}} - 10^{\frac{0}{20}}}{10^{\frac{-12}{20}} - 10^{\frac{0}{20}}} \times 128$ $\alpha = 85.266 \rightarrow 55_H$ <p>55H calculated is set as &h61 or &h69</p>

AGC_TH1 setting of DRC1 for high frequency band

Please set below to the setting value of AGC_TH2.

Default = 40h

Select Address	Explanation of operation																
&h28 [6:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>Threshold</th> </tr> </thead> <tbody> <tr> <td>00</td> <td>-32dB</td> </tr> <tr> <td>⋮</td> <td>⋮</td> </tr> <tr> <td>3F</td> <td>-0.5dB</td> </tr> <tr> <td>40</td> <td>0dB</td> </tr> <tr> <td>41</td> <td>+0.5dB</td> </tr> <tr> <td>⋮</td> <td>⋮</td> </tr> <tr> <td>58</td> <td>+12dB</td> </tr> </tbody> </table>	Command	Threshold	00	-32dB	⋮	⋮	3F	-0.5dB	40	0dB	41	+0.5dB	⋮	⋮	58	+12dB
Command	Threshold																
00	-32dB																
⋮	⋮																
3F	-0.5dB																
40	0dB																
41	+0.5dB																
⋮	⋮																
58	+12dB																

AGC_TH2 setting of DRC2 for high frequency band

Default = 40h

Select Address	Explanation of operation																
&h2C [6:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>Threshold</th> </tr> </thead> <tbody> <tr> <td>00</td> <td>-32dB</td> </tr> <tr> <td>⋮</td> <td>⋮</td> </tr> <tr> <td>3F</td> <td>-0.5dB</td> </tr> <tr> <td>40</td> <td>0dB</td> </tr> <tr> <td>41</td> <td>+0.5dB</td> </tr> <tr> <td>⋮</td> <td>⋮</td> </tr> <tr> <td>58</td> <td>+12dB</td> </tr> </tbody> </table>	Command	Threshold	00	-32dB	⋮	⋮	3F	-0.5dB	40	0dB	41	+0.5dB	⋮	⋮	58	+12dB
Command	Threshold																
00	-32dB																
⋮	⋮																
3F	-0.5dB																
40	0dB																
41	+0.5dB																
⋮	⋮																
58	+12dB																

High frequency band A_RATE setting (It is the transition time of a compression curve at the time of an attack.)
 DRC1 and DRC2 for high frequency band are individually setting.

Default = 3h

Select Address	Explanation of operation																							
DRC1 &h2A [6:4] DRC2 &h2E [6:4]	<table border="1"> <thead> <tr> <th>Command</th> <th>A_RATE time</th> <th>Command</th> <th>A_RATE time</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>1ms</td> <td>4</td> <td>5ms</td> </tr> <tr> <td>1</td> <td>2ms</td> <td>5</td> <td>10ms</td> </tr> <tr> <td>2</td> <td>3ms</td> <td>6</td> <td>20ms</td> </tr> <tr> <td>3</td> <td>4ms</td> <td>7</td> <td>40ms</td> </tr> </tbody> </table>				Command	A_RATE time	Command	A_RATE time	0	1ms	4	5ms	1	2ms	5	10ms	2	3ms	6	20ms	3	4ms	7	40ms
Command	A_RATE time	Command	A_RATE time																					
0	1ms	4	5ms																					
1	2ms	5	10ms																					
2	3ms	6	20ms																					
3	4ms	7	40ms																					

High frequency band R_RATE setting (It is the transition time of an extension curve at the time of release.)
 DRC1 and DRC2 for high frequency band are individually setting.

Default = Bh

Select Address	Explanation of operation																																							
DRC1 &h2A [3:0] DRC2 &h2E [3:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>R_RATE time</th> <th>Command</th> <th>R_RATE time</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0.125s</td> <td>8</td> <td>2s</td> </tr> <tr> <td>1</td> <td>0.1825s</td> <td>9</td> <td>2.5s</td> </tr> <tr> <td>2</td> <td>0.25s</td> <td>A</td> <td>3s</td> </tr> <tr> <td>3</td> <td>0.5s</td> <td>B</td> <td>4s</td> </tr> <tr> <td>4</td> <td>0.75s</td> <td>C</td> <td>5s</td> </tr> <tr> <td>5</td> <td>1s</td> <td>D</td> <td>6s</td> </tr> <tr> <td>6</td> <td>1.25s</td> <td>E</td> <td>7s</td> </tr> <tr> <td>7</td> <td>1.5s</td> <td>F</td> <td>8s</td> </tr> </tbody> </table>				Command	R_RATE time	Command	R_RATE time	0	0.125s	8	2s	1	0.1825s	9	2.5s	2	0.25s	A	3s	3	0.5s	B	4s	4	0.75s	C	5s	5	1s	D	6s	6	1.25s	E	7s	7	1.5s	F	8s
Command	R_RATE time	Command	R_RATE time																																					
0	0.125s	8	2s																																					
1	0.1825s	9	2.5s																																					
2	0.25s	A	3s																																					
3	0.5s	B	4s																																					
4	0.75s	C	5s																																					
5	1s	D	6s																																					
6	1.25s	E	7s																																					
7	1.5s	F	8s																																					

A_TIME1 setting of DRC1 for high frequency band (Detection time setting of attack operation)
 DRC1 and DRC2 for high frequency band are individually setting.

Default = 1h

Select Address	Explanation of operation																																							
DRC1 &h2B [7:4] DRC2 &h2F [7:4]	<table border="1"> <thead> <tr> <th>Command</th> <th>A_TIME time</th> <th>Command</th> <th>A_TIME time</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0ms</td> <td>8</td> <td>6ms</td> </tr> <tr> <td>1</td> <td>0.5ms</td> <td>9</td> <td>7ms</td> </tr> <tr> <td>2</td> <td>1ms</td> <td>A</td> <td>8ms</td> </tr> <tr> <td>3</td> <td>1.5ms</td> <td>B</td> <td>9ms</td> </tr> <tr> <td>4</td> <td>2ms</td> <td>C</td> <td>10ms</td> </tr> <tr> <td>5</td> <td>3ms</td> <td>D</td> <td>20ms</td> </tr> <tr> <td>6</td> <td>4ms</td> <td>E</td> <td>30ms</td> </tr> <tr> <td>7</td> <td>5ms</td> <td>F</td> <td>40ms</td> </tr> </tbody> </table>				Command	A_TIME time	Command	A_TIME time	0	0ms	8	6ms	1	0.5ms	9	7ms	2	1ms	A	8ms	3	1.5ms	B	9ms	4	2ms	C	10ms	5	3ms	D	20ms	6	4ms	E	30ms	7	5ms	F	40ms
Command	A_TIME time	Command	A_TIME time																																					
0	0ms	8	6ms																																					
1	0.5ms	9	7ms																																					
2	1ms	A	8ms																																					
3	1.5ms	B	9ms																																					
4	2ms	C	10ms																																					
5	3ms	D	20ms																																					
6	4ms	E	30ms																																					
7	5ms	F	40ms																																					


R_TIME setting of DRC for high frequency band (Detection time setting of release operation)
 DRC1 and DRC2 for high frequency band are individually setting.

Default = 3h

Select Address	Explanation of operation																							
DRC1 &h2B [2:0] DRC2 &h2F [2:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>R_TIME time</th> <th>Command</th> <th>R_TIME time</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>5ms</td> <td>4</td> <td>100ms</td> </tr> <tr> <td>1</td> <td>10ms</td> <td>5</td> <td>200ms</td> </tr> <tr> <td>2</td> <td>25ms</td> <td>6</td> <td>300ms</td> </tr> <tr> <td>3</td> <td>50ms</td> <td>7</td> <td>400ms</td> </tr> </tbody> </table>				Command	R_TIME time	Command	R_TIME time	0	5ms	4	100ms	1	10ms	5	200ms	2	25ms	6	300ms	3	50ms	7	400ms
Command	R_TIME time	Command	R_TIME time																					
0	5ms	4	100ms																					
1	10ms	5	200ms																					
2	25ms	6	300ms																					
3	50ms	7	400ms																					

Slope (α) setting of DRC1 for low frequency band

Default = 80h

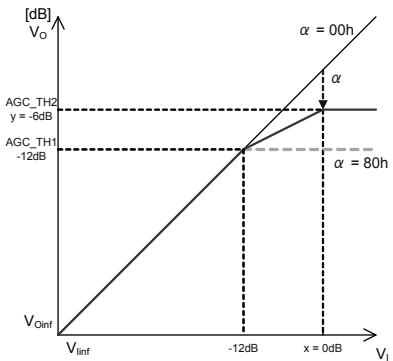Select Address	Explanation of operation
&h31 [7:0]	 <p>The formula which asks for Slope alpha is described below. alpha changes into 8bit Hex data of the complement of 2 the value calculated by calculation.</p> $\alpha = \frac{10^{\frac{y}{20}} - 10^{\frac{x}{20}}}{10^{\frac{TH}{20}} - 10^{\frac{x}{20}}} \times 128$ <p>TH is AGC_TH1. x is input level. y is output level.</p> <p>Ex) It asks for alpha at the time of AGC_TH1 = -12dB, x = 0dB y = -6dB</p> $\alpha = \frac{10^{\frac{-6}{20}} - 10^{\frac{0}{20}}}{10^{\frac{-12}{20}} - 10^{\frac{0}{20}}} \times 128$ $\alpha = 85.266 \rightarrow 55_H$ <p>55H calculated is set as &h61 or &h69</p>

AGC_TH1 setting of DRC1 for low frequency band

Please set below to the setting value of AGC_TH2.

Default = 40h

Select Address	Explanation of operation																
&h30 [6:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>Threshold</th> </tr> </thead> <tbody> <tr> <td>00</td> <td>-32dB</td> </tr> <tr> <td>:</td> <td>:</td> </tr> <tr> <td>3F</td> <td>-0.5dB</td> </tr> <tr> <td>40</td> <td>0dB</td> </tr> <tr> <td>41</td> <td>+0.5dB</td> </tr> <tr> <td>:</td> <td>:</td> </tr> <tr> <td>58</td> <td>+12dB</td> </tr> </tbody> </table>	Command	Threshold	00	-32dB	:	:	3F	-0.5dB	40	0dB	41	+0.5dB	:	:	58	+12dB
Command	Threshold																
00	-32dB																
:	:																
3F	-0.5dB																
40	0dB																
41	+0.5dB																
:	:																
58	+12dB																

AGC_TH2 setting of DRC2 for low frequency band

Default = 40h

Select Address	Explanation of operation																
&h34 [6:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>Threshold</th> </tr> </thead> <tbody> <tr> <td>00</td> <td>-32dB</td> </tr> <tr> <td>:</td> <td>:</td> </tr> <tr> <td>3F</td> <td>-0.5dB</td> </tr> <tr> <td>40</td> <td>0dB</td> </tr> <tr> <td>41</td> <td>+0.5dB</td> </tr> <tr> <td>:</td> <td>:</td> </tr> <tr> <td>58</td> <td>+12dB</td> </tr> </tbody> </table>	Command	Threshold	00	-32dB	:	:	3F	-0.5dB	40	0dB	41	+0.5dB	:	:	58	+12dB
Command	Threshold																
00	-32dB																
:	:																
3F	-0.5dB																
40	0dB																
41	+0.5dB																
:	:																
58	+12dB																

Low frequency band A_RATE setting (It is the transition time of a compression curve at the time of an attack.)
DRC1 and DRC2 for low frequency band are individually setting.

Default = 3h

Select Address	Explanation of operation																							
DRC1 &h32 [6:4] DRC2 &h36 [6:4]	<table border="1"> <thead> <tr> <th>Command</th> <th>A_RATE time</th> <th>Command</th> <th>A_RATE time</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>1ms</td> <td>4</td> <td>5ms</td> </tr> <tr> <td>1</td> <td>2ms</td> <td>5</td> <td>10ms</td> </tr> <tr> <td>2</td> <td>3ms</td> <td>6</td> <td>20ms</td> </tr> <tr> <td>3</td> <td>4ms</td> <td>7</td> <td>40ms</td> </tr> </tbody> </table>				Command	A_RATE time	Command	A_RATE time	0	1ms	4	5ms	1	2ms	5	10ms	2	3ms	6	20ms	3	4ms	7	40ms
Command	A_RATE time	Command	A_RATE time																					
0	1ms	4	5ms																					
1	2ms	5	10ms																					
2	3ms	6	20ms																					
3	4ms	7	40ms																					

Low frequency band R_RATE setting (It is the transition time of an extension curve at the time of release.)
DRC1 and DRC2 for low frequency band are individually setting.

Default = Bh

Select Address	Explanation of operation																																							
DRC1 &h32 [3:0] DRC2 &h36 [3:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>R_RATE time</th> <th>Command</th> <th>R_RATE time</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0.125s</td> <td>8</td> <td>2s</td> </tr> <tr> <td>1</td> <td>0.1825s</td> <td>9</td> <td>2.5s</td> </tr> <tr> <td>2</td> <td>0.25s</td> <td>A</td> <td>3s</td> </tr> <tr> <td>3</td> <td>0.5s</td> <td>B</td> <td>4s</td> </tr> <tr> <td>4</td> <td>0.75s</td> <td>C</td> <td>5s</td> </tr> <tr> <td>5</td> <td>1s</td> <td>D</td> <td>6s</td> </tr> <tr> <td>6</td> <td>1.25s</td> <td>E</td> <td>7s</td> </tr> <tr> <td>7</td> <td>1.5s</td> <td>F</td> <td>8s</td> </tr> </tbody> </table>				Command	R_RATE time	Command	R_RATE time	0	0.125s	8	2s	1	0.1825s	9	2.5s	2	0.25s	A	3s	3	0.5s	B	4s	4	0.75s	C	5s	5	1s	D	6s	6	1.25s	E	7s	7	1.5s	F	8s
Command	R_RATE time	Command	R_RATE time																																					
0	0.125s	8	2s																																					
1	0.1825s	9	2.5s																																					
2	0.25s	A	3s																																					
3	0.5s	B	4s																																					
4	0.75s	C	5s																																					
5	1s	D	6s																																					
6	1.25s	E	7s																																					
7	1.5s	F	8s																																					

A_TIME1 setting of DRC1 for low frequency band (Detection time setting of attack operation)
DRC1 and DRC2 for low frequency band are individually setting.

Default = 1h

Select Address	Explanation of operation																																							
DRC1 &h33 [7:4] DRC1 &h37 [7:4]	<table border="1"> <thead> <tr> <th>Command</th> <th>A_TIME time</th> <th>Command</th> <th>A_TIME time</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0ms</td> <td>8</td> <td>6ms</td> </tr> <tr> <td>1</td> <td>0.5ms</td> <td>9</td> <td>7ms</td> </tr> <tr> <td>2</td> <td>1ms</td> <td>A</td> <td>8ms</td> </tr> <tr> <td>3</td> <td>1.5ms</td> <td>B</td> <td>9ms</td> </tr> <tr> <td>4</td> <td>2ms</td> <td>C</td> <td>10ms</td> </tr> <tr> <td>5</td> <td>3ms</td> <td>D</td> <td>20ms</td> </tr> <tr> <td>6</td> <td>4ms</td> <td>E</td> <td>30ms</td> </tr> <tr> <td>7</td> <td>5ms</td> <td>F</td> <td>40ms</td> </tr> </tbody> </table>				Command	A_TIME time	Command	A_TIME time	0	0ms	8	6ms	1	0.5ms	9	7ms	2	1ms	A	8ms	3	1.5ms	B	9ms	4	2ms	C	10ms	5	3ms	D	20ms	6	4ms	E	30ms	7	5ms	F	40ms
Command	A_TIME time	Command	A_TIME time																																					
0	0ms	8	6ms																																					
1	0.5ms	9	7ms																																					
2	1ms	A	8ms																																					
3	1.5ms	B	9ms																																					
4	2ms	C	10ms																																					
5	3ms	D	20ms																																					
6	4ms	E	30ms																																					
7	5ms	F	40ms																																					


R_TIME setting of DRC for low frequency band (Detection time setting of release operation)
DRC1 and DRC2 for low frequency band are individually setting.

Default = 3h

Select Address	Explanation of operation																							
DRC1 &h33 [2:0] DRC2 &h37 [2:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>R_TIME time</th> <th>Command</th> <th>R_TIME time</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>5ms</td> <td>4</td> <td>100ms</td> </tr> <tr> <td>1</td> <td>10ms</td> <td>5</td> <td>200ms</td> </tr> <tr> <td>2</td> <td>25ms</td> <td>6</td> <td>300ms</td> </tr> <tr> <td>3</td> <td>50ms</td> <td>7</td> <td>400ms</td> </tr> </tbody> </table>				Command	R_TIME time	Command	R_TIME time	0	5ms	4	100ms	1	10ms	5	200ms	2	25ms	6	300ms	3	50ms	7	400ms
Command	R_TIME time	Command	R_TIME time																					
0	5ms	4	100ms																					
1	10ms	5	200ms																					
2	25ms	6	300ms																					
3	50ms	7	400ms																					


[Question]

What is the purpose of DRC for all frequency bands?

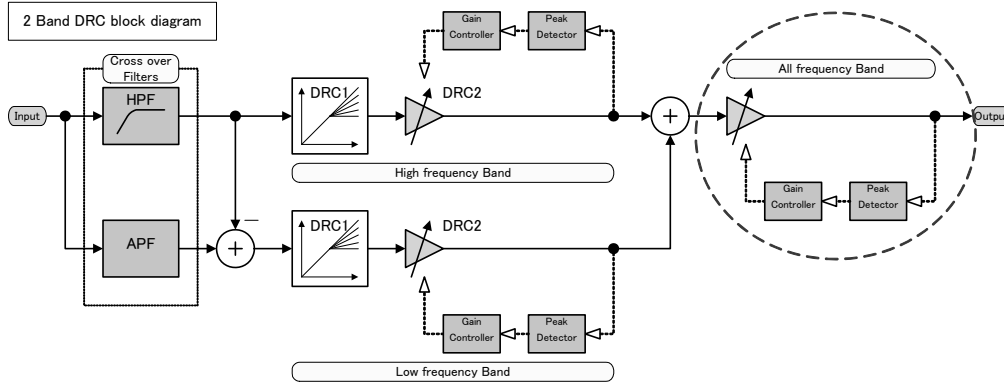


[Answer]

The purpose is for keeping constant the output level in the crossover point of low frequency band and high frequency band. A frequency characteristic figure with a cross over frequency 1.2kHz of DRC for low frequency band and DRC for high frequency band is shown below.

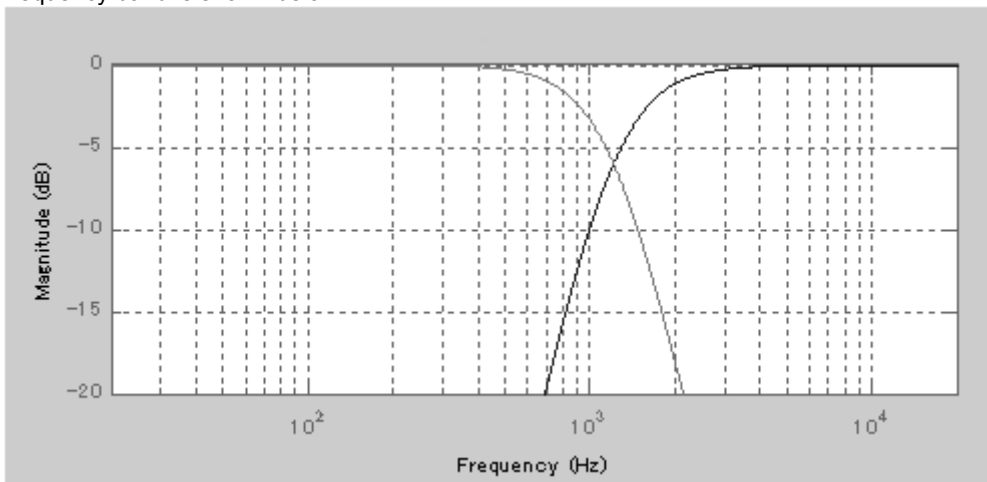

Next, the graph of AGC_TH=0dB, cross over frequency = 1.2kHz, and the frequency vs. output gain when not using all the DRC for all frequency bands is shown.

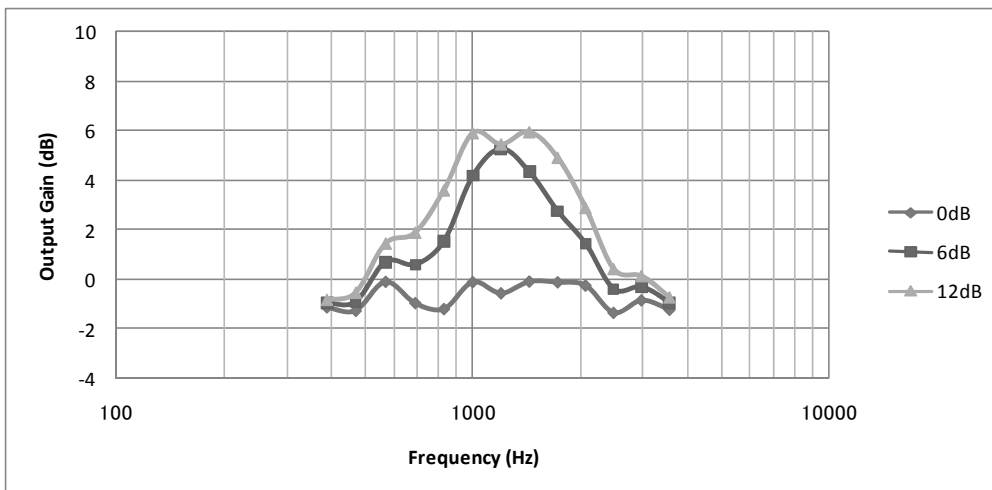

Input level 0dB is a flat. However, on an input level of +6dB or +12dB, it is over 0dB of a compression level near the cross over frequency.

In order to prevent this phenomenon, DRC for all frequency bands is used. However, when this phenomenon does not exist in a problem, I think that it is not necessary to use DRC for all frequency bands.

AGC_TH of DRC for all frequency band sets up AGC_TH2 value of the higher one, when AGC_TH2 differ by DRC for high frequency band, and DRC for low frequency band.

【Question】

Recommendation value setting of 2 band DRC ?

【Answer】

The recommendation value of 2 band DRC was examined to speaker protection using FPD TV.

- A_RATE : 4ms
- R_RATE : 2s or more
- A_TIME : 0.5ms
- R_TIME : 50ms or more

It is not uncomfortable to a music source to arrange all DRC (low frequency band, high frequency band, all frequency band) with the same value.

【Question】


When master volume is increased, why is it that only the sound of a high region becomes large?

【Answer】


It investigated about the cross over frequency and the relation of AGC_TH2 of DRC for high frequency band.

Its sound energy decreases, so that music data becomes high frequency. When a cross over frequency is set up highly, unless it lowers AGC_TH2 of DRC for high frequency band, when master volume is increased, the effect by limit cannot be heard.

The red line shows the Peak level.

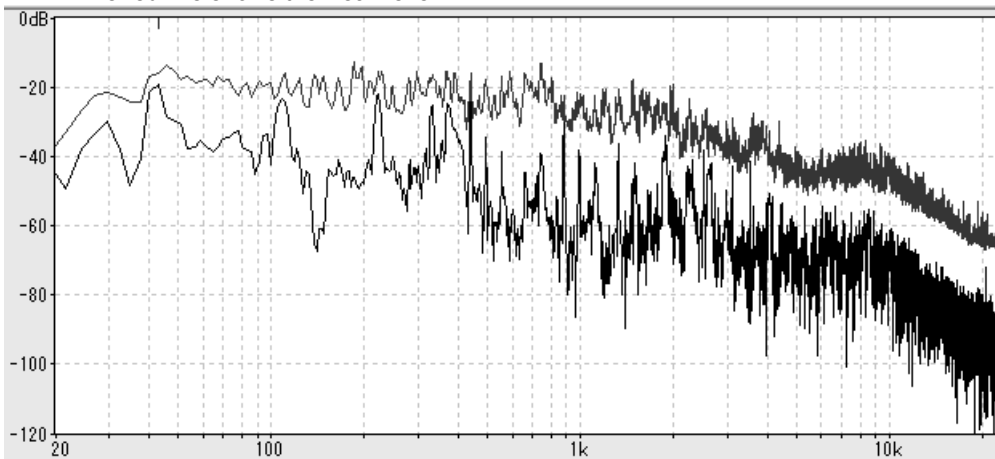

About the amount of adjustments of AGC_TH2 of DRC for high frequency band.

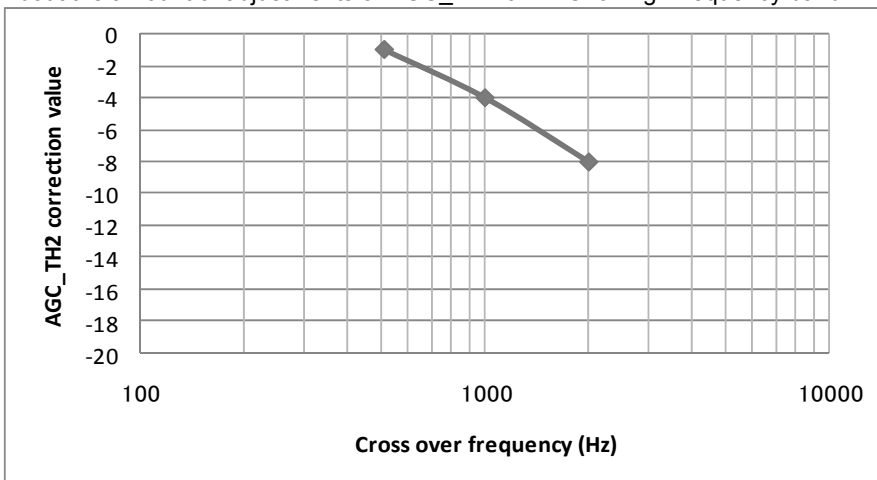

Please use as a standard of the adjustment value from AGC_TH2 value of DRC for low frequency band. Moreover, the amount of adjustments decreases by setting up a cross over frequency lowness.

1-11. Post-scaler

To prevent from an overflow in the DSP, it adjusts a gain with the scaler. An adjustable range can be set up at a 0.5dB step from +48dB to -79dB. Post-scaler does not have a smooth transition function.
(Same control of Lch/Rch.)

Default = 60h

Select Address	Explanation of operation																				
&h13 [7:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>Gain</th> </tr> </thead> <tbody> <tr> <td>00</td> <td>+48dB</td> </tr> <tr> <td>01</td> <td>+47.5dB</td> </tr> <tr> <td>⋮</td> <td>⋮</td> </tr> <tr> <td>60</td> <td>0dB</td> </tr> <tr> <td>61</td> <td>-0.5dB</td> </tr> <tr> <td>62</td> <td>-1dB</td> </tr> <tr> <td>⋮</td> <td>⋮</td> </tr> <tr> <td>FE</td> <td>-79dB</td> </tr> <tr> <td>FF</td> <td>-∞</td> </tr> </tbody> </table>	Command	Gain	00	+48dB	01	+47.5dB	⋮	⋮	60	0dB	61	-0.5dB	62	-1dB	⋮	⋮	FE	-79dB	FF	-∞
Command	Gain																				
00	+48dB																				
01	+47.5dB																				
⋮	⋮																				
60	0dB																				
61	-0.5dB																				
62	-1dB																				
⋮	⋮																				
FE	-79dB																				
FF	-∞																				

1-12. Fine Post-scaler

An adjustable range can be set up at a 0.1dB step from +0.7dB to -0.8dB. Fine Post-scaler does not have a smooth transition function.
(Independent control of Lch/Rch.)


Default=8h

Select Address	Explanation of operation																																				
Lch &h14 [7:4] Rch &h14 [3:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>Gain</th> <th>Command</th> <th>Gain</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>-0.8dB</td> <td>8</td> <td>0dB</td> </tr> <tr> <td>1</td> <td>-0.7dB</td> <td>9</td> <td>+0.1dB</td> </tr> <tr> <td>2</td> <td>-0.6dB</td> <td>A</td> <td>+0.2dB</td> </tr> <tr> <td>3</td> <td>-0.5dB</td> <td>B</td> <td>+0.3dB</td> </tr> <tr> <td>4</td> <td>-0.4dB</td> <td>C</td> <td>+0.4dB</td> </tr> <tr> <td>5</td> <td>-0.3dB</td> <td>D</td> <td>+0.5dB</td> </tr> <tr> <td>6</td> <td>-0.2dB</td> <td>E</td> <td>+0.6dB</td> </tr> <tr> <td>7</td> <td>-0.1dB</td> <td>F</td> <td>+0.7dB</td> </tr> </tbody> </table>	Command	Gain	Command	Gain	0	-0.8dB	8	0dB	1	-0.7dB	9	+0.1dB	2	-0.6dB	A	+0.2dB	3	-0.5dB	B	+0.3dB	4	-0.4dB	C	+0.4dB	5	-0.3dB	D	+0.5dB	6	-0.2dB	E	+0.6dB	7	-0.1dB	F	+0.7dB
Command	Gain	Command	Gain																																		
0	-0.8dB	8	0dB																																		
1	-0.7dB	9	+0.1dB																																		
2	-0.6dB	A	+0.2dB																																		
3	-0.5dB	B	+0.3dB																																		
4	-0.4dB	C	+0.4dB																																		
5	-0.3dB	D	+0.5dB																																		
6	-0.2dB	E	+0.6dB																																		
7	-0.1dB	F	+0.7dB																																		

1-13. Hard Clipper

When measuring the rated output of the television, THD+N measures in 10%. It can be made to clip with any output amplitude by using a clipper function. For example, the rated output of 10W or 5W can be gained using the amplifier of 15W output.

Hard clip

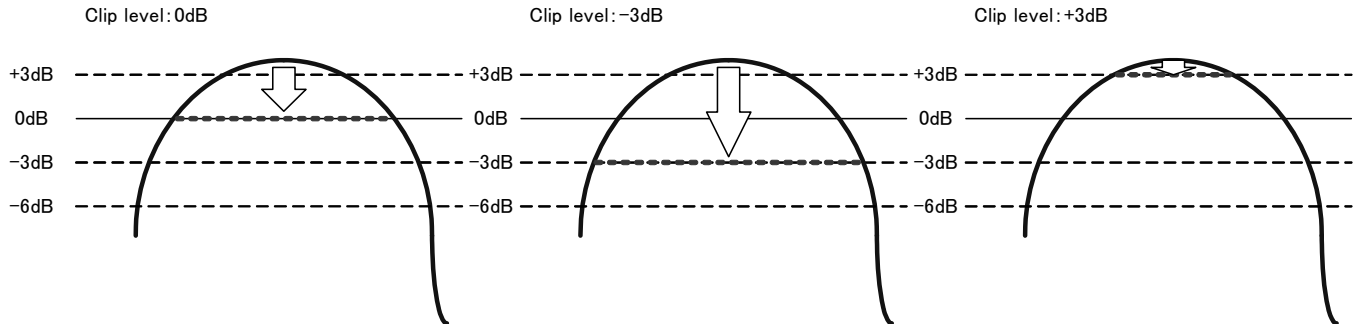

Clipper setting
Default = 1

Select Address	Value	Explanation of operation
&h1A [0]	0	Clipper function is not used.
	1	Hard clipper function is used.

Clip level selection
Default = E1h

Select Address	Explanation of operation																
&h1B [7:0]	<table border="1"> <thead> <tr> <th>Command</th> <th>Gain</th> </tr> </thead> <tbody> <tr> <td>00</td> <td>-22.5dB</td> </tr> <tr> <td>⋮</td> <td>⋮</td> </tr> <tr> <td>E0</td> <td>-0.1dB</td> </tr> <tr> <td>E1</td> <td>0dB</td> </tr> <tr> <td>E2</td> <td>+0.1dB</td> </tr> <tr> <td>⋮</td> <td>⋮</td> </tr> <tr> <td>FF</td> <td>+3dB</td> </tr> </tbody> </table>	Command	Gain	00	-22.5dB	⋮	⋮	E0	-0.1dB	E1	0dB	E2	+0.1dB	⋮	⋮	FF	+3dB
	Command	Gain															
	00	-22.5dB															
	⋮	⋮															
	E0	-0.1dB															
	E1	0dB															
	E2	+0.1dB															
	⋮	⋮															
	FF	+3dB															

1-14. DC cut HPF (Back)

DC offset element of the digital signal outputted from audio DSP is cut by this HPF.

The cutoff frequency f_c of HPF uses the 1Hz filter, and the degree uses the first-order filter.

Default = 1

Select Address	Value	Explanation of operation
&h18 [0]	0	Not use
	1	Use

1-15. RAM clear

The data RAM of DSP and coefficient RAM are cleared.

40us or more is required until all the data is cleared.

Clear of the data RAM

Default = 1

Select Address	Value	Explanation of operation
&h01 [7]	0	Normal
	1	Clear operation

Clear of coefficient RAM


Default = 1

Select Address	Value	Explanation of operation
&h01 [6]	0	Normal
	1	Clear operation

1-16. Audio Output Level Meter

It is possible to output the peak level of the PCM data inputted into a PWM processor.
 A peak value can be read using the 2-wire command interface as 16 bit data of an absolute value.
 The interval holding a peak value can be selected from six steps (50ms step) from 50ms to 300ms.
 A peak hold result can be selected from L channel, R channel, and a monophonic channel $\{(Lch+Rch) / 2\}$.

Audio Output Level Meter block diagram

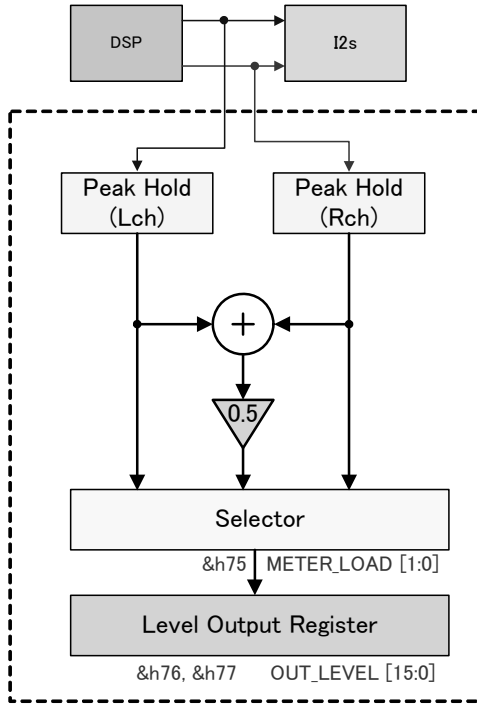

Setting of the peak level hold time interval of Audio Output Level Meter

Default = 00h

Select Address	Explanation of operation	
&h74 [2:0]	Command	Hold time
	0	50ms
	1	100ms
	2	150ms
	3	200ms
	4	250ms
	5	300ms

The signal of Audio Level Meter read-back is selected.
 A value will be taken into a read-only register if a setting value is written in.
 In order to update this register value, it is necessary to write in a setting value again.

Default = 0

Select Address	Value	Explanation of operation
&h75 [1:0]	0	The peak level of L channel
	1	The peak level of R channel
	2	The peak level of monophonic channel $\{(Lch+Rch) / 2\}$

Read-back of Audio Output Level

&h76 (upper 8 bits) and a &h77 (lower 8 bits) commands are read for the maximum within the period appointed by the command &h74 using the 2-wire interface.

(Example)

When FFFFh is read, mean 1.0 (0dBFs).

When 8000h is read, mean 0.5 (-6dBFs).


2. Setting and reading method of parametric equalizer

It explains a detailed sequence of the setting method and the reading method of the parametric equalizer separately for usage.

2-1 PEQ coefficient setting

The parametric equalizer consists of Bi-quad filter as follows. Each coefficient of Bi-quad filter can be written directly. It is S2.21 format, and setting range is $-4 \leq x < +4$.

Moreover, the coefficient address is shown in Table 1.

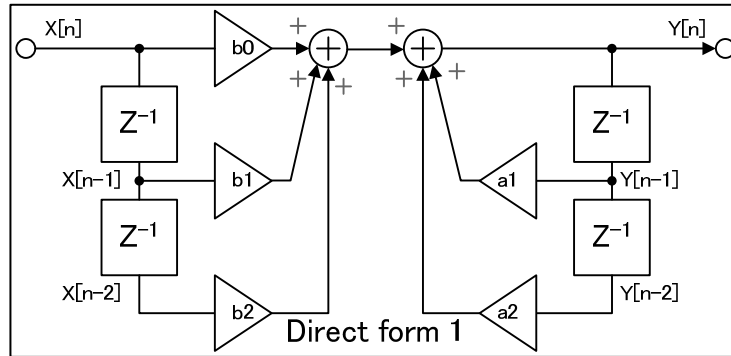

2-1-1 Writing sequence (It sets up in number order)

1. BANK1 to 4 is appointed. (&h60[1:0])
2. Address setting (&h61) (*1)Table 1 is referred to.
3. 24bit coefficient Upper[23:16]bit setting (&h62[7:0])
4. 24bit coefficient Middle[15:8]bit setting (&h63[7:0])
5. 24bit coefficient Lower [7:0]bit setting (&h64[7:0])
6. The writing of coefficients are performed. (&h65[0] = 1) (*2)

(*2) After writing complete of coefficients is cleared automatically. It is not necessary to transmit h65[0] =L. Coefficient writing takes about 100μsec.100μsec should not change an address setup and several 24-bit setup after coefficient write-in execution.

(ex) When 0x3DEDE7 is written in BANK1, same L/Rch, 16band BQ1 b0

1. &h60 = 0*h (BANK1 is appointed.)
2. &h61 = 00h (16band BQ1 b0 is appointed)
3. &h62 = 3Dh (Upper[23:16] is setting)
4. &h63 = EDh (Middle[15:8] is setting)
5. &h64 = E7h (Lower[7:0] is setting)
6. &h65 = 01h (Coefficient transfer) (*3)

(*3) After writing complete of coefficients is cleared automatically.

7. 100μsec or more μsec wait

The writing of other coefficients is performed.

2-1-2 Read-back sequence (It sets up in number order)

1. BANK1 to 4 is appointed. (&h60[3:2])
2. Address setting (&h61) (*4)Table 1 is referred to.
3. Setting of a read-back register address (&hD0)
4. Read-back of the 24bit coefficient Upper[23:16]bit (&h66[7:0])
5. Read-back of the 24bit coefficient Middle[15:8]bit (&h67[7:0])
6. Read-back of the 24bit coefficient Lower[7:0]bit (&h68[7:0])

2-1-3 When the coefficient of PEQ is set up directly and a soft transition is performed

1. Set PEQ coefficient to soft transition address whose address is 50-54. Please refer to Table1.
Since in the case of &h60[4]=1(Enable L/R independent setting) and &h53 [5:4] =0 a soft transition is carried out and it is set to LR simultaneous , please write a coefficient in both LR address.
In the case of &h53[5:4]=1, coefficient is set to only Lch address.
In the case of &h53[5:4]=2, coefficient is set to only Rch address.
2. Select PEQ channel that is performed soft transition by setting &h51[4:0] address.
3. &h58[0]=1h : Start soft transition (After the completion of soft transition this register is automatically cleared by 0 h)
4. Wait soft transition completion(about 24msec), or read command &h59 [0], and stand by until it is cleared by 0 h.

Table1. Specified coefficient

&h61[6:0]	Specified coefficient	&h61[6:0]	Specified coefficient	&h61[6:0]	Specified coefficient
00	16BandBQ1 b0	23	16BandBQ8 b0	46	16BandBQ15 b0
01	16BandBQ1 b1	24	16BandBQ8 b1	47	16BandBQ15 b1
02	16BandBQ1 b2	25	16BandBQ8 b2	48	16BandBQ15 b2
03	16BandBQ1 a1	26	16BandBQ8 a1	49	16BandBQ15 a1
04	16BandBQ1 a2	27	16BandBQ8 a2	4A	16BandBQ15 a2
05	16BandBQ2 b0	28	16BandBQ9 b0	4B	16BandBQ16 b0
06	16BandBQ2 b1	29	16BandBQ9 b1	4C	16BandBQ16 b1
07	16BandBQ2 b2	2A	16BandBQ9 b2	4D	16BandBQ16 b2
08	16BandBQ2 a1	2B	16BandBQ9 a1	4E	16BandBQ16 a1
09	16BandBQ2 a2	2C	16BandBQ9 a2	4F	16BandBQ16 a2
0A	16BandBQ3 b0	2D	16BandBQ10 b0	50	Smooth BQ b0
0B	16BandBQ3 b1	2E	16BandBQ10 b1	51	Smooth BQ b1
0C	16BandBQ3 b2	2F	16BandBQ10 b2	52	Smooth BQ b2
0D	16BandBQ3 a1	30	16BandBQ10 a1	53	Smooth BQ a1
0E	16BandBQ3 a2	31	16BandBQ10 a2	54	Smooth BQ a2
0F	16BandBQ4 b0	32	16BandBQ11 b0	55	DRC_HPF b0
10	16BandBQ4 b1	33	16BandBQ11 b1	56	DRC_HPF b1
11	16BandBQ4 b2	34	16BandBQ11 b2	57	DRC_HPF b2
12	16BandBQ4 a1	35	16BandBQ11 a1	58	DRC_HPF a1
13	16BandBQ4 a2	36	16BandBQ11 a2	59	DRC_HPF a2
14	16BandBQ5 b0	37	16BandBQ12 b0	5A	DRC_APF b0
15	16BandBQ5 b1	38	16BandBQ12 b1	5B	DRC_APF b1
16	16BandBQ5 b2	39	16BandBQ12 b2	5C	DRC_APF b2
17	16BandBQ5 a1	3A	16BandBQ12 a1	5D	DRC_APF a1
18	16BandBQ5 a2	3B	16BandBQ12 a2	5E	DRC_APF a2
19	16BandBQ6 b0	3C	16BandBQ13 b0		
1A	16BandBQ6 b1	3D	16BandBQ13 b1		
1B	16BandBQ6 b2	3E	16BandBQ13 b2		
1C	16BandBQ6 a1	3F	16BandBQ13 a1		
1D	16BandBQ6 a2	40	16BandBQ13 a2		
1E	16BandBQ7 b0	41	16BandBQ14 b0		
1F	16BandBQ7 b1	42	16BandBQ14 b1		
20	16BandBQ7 b2	43	16BandBQ14 b2		
21	16BandBQ7 a1	44	16BandBQ14 a1		
22	16BandBQ7 a2	45	16BandBQ14 a2		

When L/R independent, Lch:&h61[7]=0, Rch: &h61[7]=1

When L/R same, &h61[7] is not reflected.

3. The mute function by a terminal

BM5480MUV has a mute function of audio DSP by a terminal.

It is possible to perform mute of the output from Audio DSP by setting a MUTEX terminal to "L."

Transition time setting at the time of mute is as follows.

Smooth transition mute time setting

The transition time when changing to a mute state is selected.


The soft transition time at the time of mute release is 10.7ms fixed.

Default = 3

Select Address	Value	Explanation of operation
&h15 [1:0]	0	10.7ms
	1	21.4ms
	2	42.7ms
	3	85.4ms

&h15[1:0] Mute time setting

It is only operated by mute terminal.

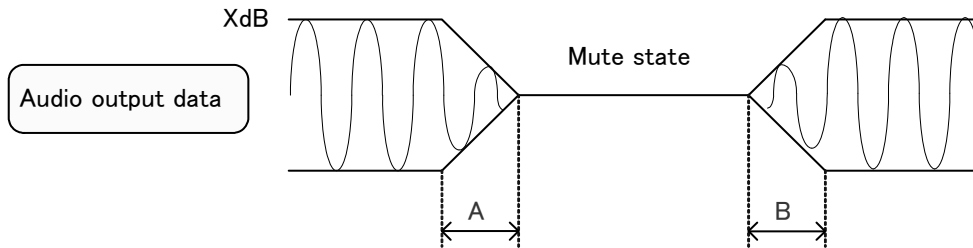

&h15[1:0] setting

Command	A	B
0	10.7ms	10.7ms
1	21.4ms	10.7ms
2	42.7ms	10.7ms
3	85.4ms	10.7ms


Smooth transition mute release time setting

Time after detecting mute release until it actually begins mute release operation is set up.

Default = 0

Select Address	Value	Explanation of operation
&h15 [5:4]	0	0ms
	1	100ms
	2	200ms
	3	300ms

Operation of mute delay &h15[5:4]


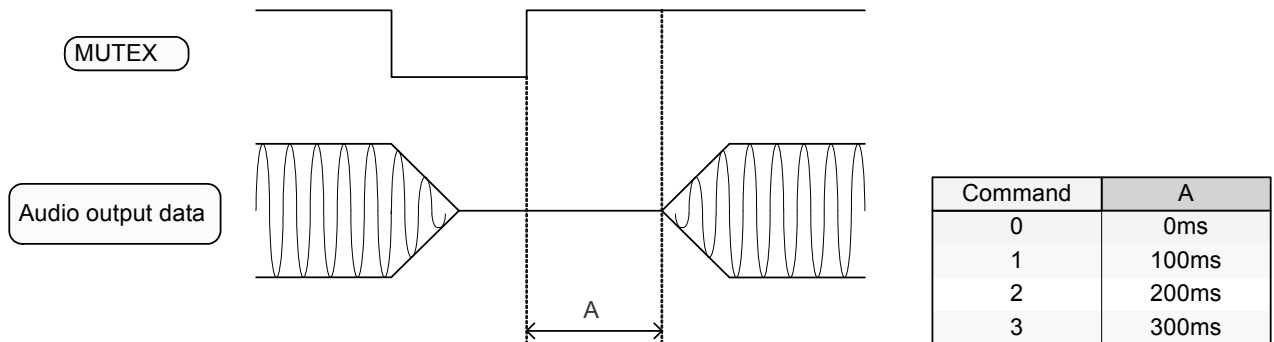


【Question】

When mute release is performed, what happens during mute operation?
Moreover, when there is release delay time, what happens?


【Answer】

When mute release is performed during mute operation, mute release operation is started in an instant.
(When delay setting is 0) Return time at this time becomes shorter than mute release time (for example, 10ms).
Next, when there is setting of release delay time, a delay timer starts a count from the time of performing mute release, and mute release operation is started after delay time completing.
When mute release time setting is set to 10ms, it is designing so that a mute release curve may draw f curve.

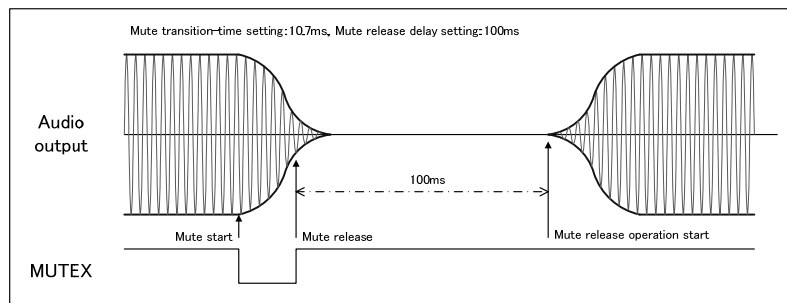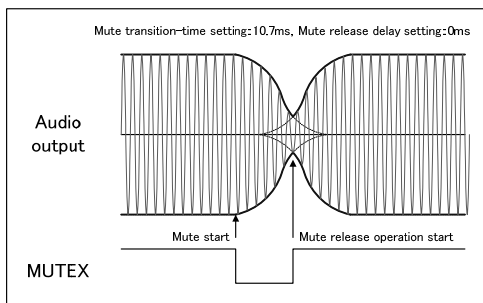

4. Small signal input detection function

There is a function which detects the audio data input of a non-signal or a small signal. This function is used in order to reduce the standby power consumption of an audio set. Setting of a detection level and detection time can be performed. If the signal below a setting detection level continues in both L channel and R channel, a small signal detection flag will become "H". A detection result can be read from command &h72 [2:0]. The point which acts as a monitor of the small signal becomes input data of audio DSP block.

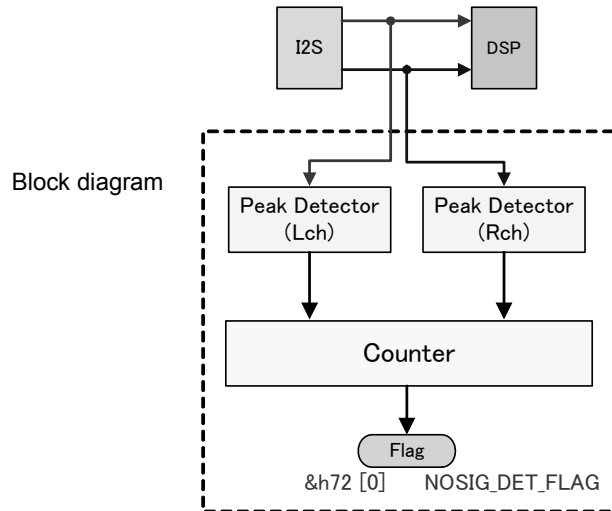

Detection level setting

Default = 00h

Select Address	Explanation of operation					
&h70 [4:0]	Command	Level	Command	Level	Command	Level
	00	-∞	08	-77dB	10	-69dB
	01	-96dB	09	-76dB	11	-68dB
	02	-92dB	0A	-75dB	12	-67dB
	03	-88dB	0B	-74dB	13	-66dB
	04	-84dB	0C	-73dB	14	-65dB
	05	-80dB	0D	-72dB	15	-64dB
	06	-79dB	0E	-71dB	16	-62dB
07	-78dB	0F	-70dB	17	-60dB	

Detection time setting

Default = 0

Select Address	Value	Explanation of operation
&h71 [1:0]	0	42.7ms
	1	85.4ms
	2	170.7ms
	3	341.4ms



* Sampling frequency is value of Fs = 48kHz. In the case of Fs = 44.1kHz, it will be about 1.09 times the setting value.

Detection flag read-back (Read Only)

Select Address	Value	Explanation of operation
&h72 [0]	0	Un-detecting.
	1	Detecting

5. LEVEL DRC

When the signal below a setting detection level and continues the setting time in both L channel and R channel, Mute function will be run. (Smooth transition mute)
 Mute threshold level has hysteresis of 6dB. Small signal detect is run back channel mixer block.

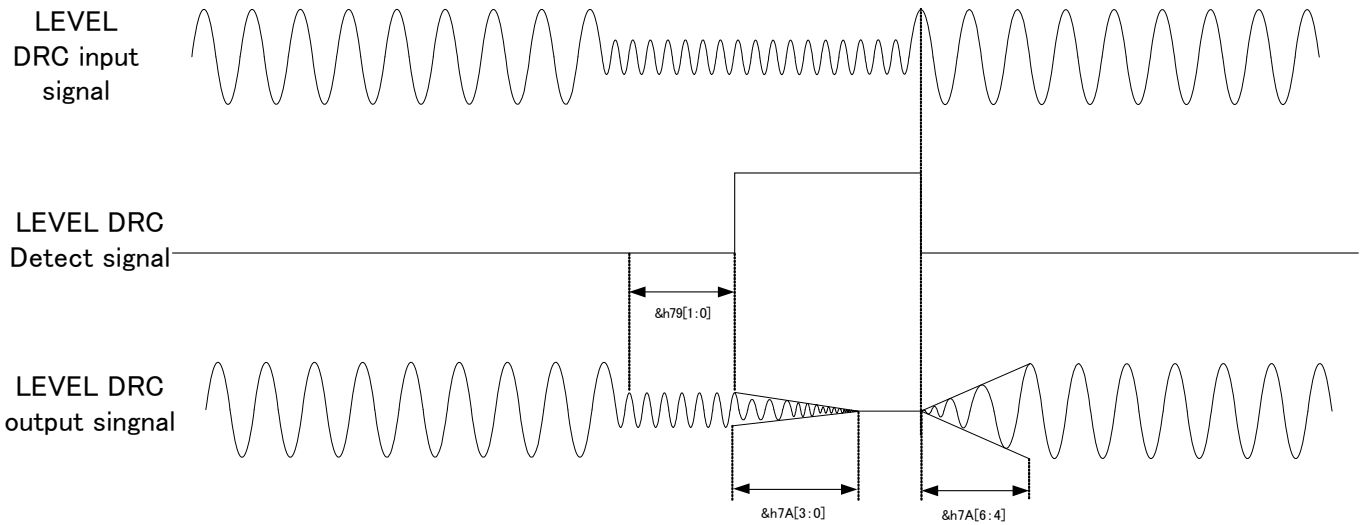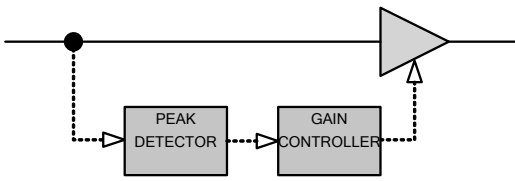

LEVEL DRC ON/OFF

Default = 1

Select Address	Value	Explanation of operation
&h78 [4]	0	OFF
	1	ON

LEVEL DRC Detect level setting
 Release level is +6dB of this setting.

Default=0h

Select Address	Explanation of operation			
&h78 [3:0]	Command	Level	Command	Level
	0	-96dB	8	-48dB
	1	-90dB	9	-42dB
	2	-84dB	A	-36dB
	3	-78dB	B	-30dB
	4	-72dB	C	-
	5	-66dB	D	-
	6	-60dB	E	-
	7	-54dB	F	-

Detect time setting

Default=3h

Select Address	Explanation of operation	
&h79 [1:0]	Command	Time
	0	42.7ms
	1	85.4ms
	2	170.7ms
	3	341.4ms

*Above is the value of FS=48kHz. FS=44.1kHz : Above value × 1.09

LEVEL DRC smooth transition mute release time setting

Default=3h

Select Address	Explanation of operation			
&h7A [6:4]	Command	Time	Command	Time
	0	1ms	4	5ms
	1	2ms	5	10ms
	2	3ms	6	20ms
	3	4ms	7	40ms

*Above is the value of FS=48kHz. FS=44.1kHz : Above value × 1.09

LEVEL DRC smooth transition mute time setting

Default=Bh

Select Address	Explanation of operation			
&h7A [3:0]	Command	Time	Command	Time
	0	0.125S	8	2S
	1	0.1825S	9	2.5S
	2	0.25S	A	3S
	3	0.5S	B	4S
	4	0.75S	C	5S
	5	1S	D	6S
	6	1.25S	E	7S
	7	1.5S	F	8S

*Above is the value of FS=48kHz. FS=44.1kHz : Above value × 1.09


LEVEL DRC Detect signal read out (Read Only)

Select Address	Value	Explanation of operation
&h7B [0]	0	No detect
	1	Detect

6. Clock stop detection and detection of BCLK frequency begin too low or too high or asynchronous state detection

6-1 Clock stop detection

BM5480MUV needs some clock source for generating proper clock to process Audio data. By stopping these clock sources, these clocks to process Audio data also stop. To prevent noise sounds, we need to detect BCLK or LRCLK stop condition. As we detect stop flag that is to be valid, output is gone to mute state (mute instantly).

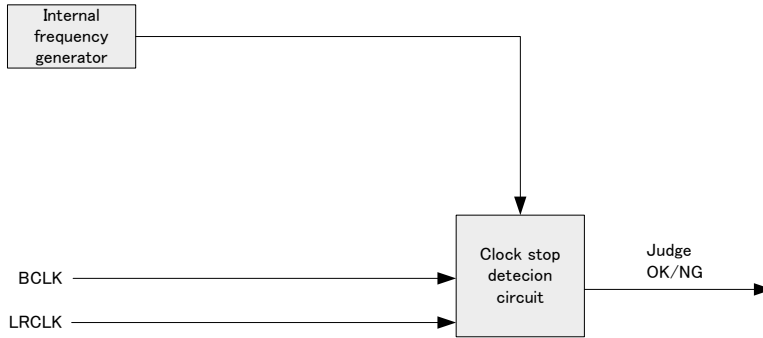

Each detect condition is set by below command. We can check detected result by reading back flag register. These flags are cleared only by sending specified commands.

LRCLK stop detection time
Default = 2h(LRCK)

Select Address	Value	Operation
LRCLK &h07 [2:0]	0	10 μs~20 μs
	1	20 μs~40 μs
	2	50 μs~100 μs
	3	100 μs~200 μs
	4	200 μs~400 μs
	5	300 μs~600 μs
	6	400 μs~800 μs
	7	500 μs~1000 μs

※Detection time has the above-mentioned variation within the limits.

BCLK stop detection time
Default = 0h(BCK)

Select Address	Value	Operation
BCLK &h08 [6:4]	0	10 μs~20 μs
	1	20 μs~40 μs
	2	50 μs~100 μs
	3	100 μs~200 μs
	4	200 μs~400 μs
	5	300 μs~600 μs
	6	400 μs~800 μs
	7	500 μs~1000 μs

※Detection time has the above-mentioned variation within the limits.

Stop detection flag read back register (Read Only)

Select Address	Value	Operation
&h09 [5]	0	Normal
	1	Detection of LRCLK stop flag
&h09 [4]	0	Normal
	1	Detection of BCLK stop flag

Stop detection flag clear register (Write Only)

Select Address	Operation
&h09 [1]	LRCLK stop detection flag is cleared by writing 1.
&h09 [0]	BCLK stop detection flag is cleared by writing 1.

※When using a clock shutdown auto return facility (Chapter 17), the above-mentioned flag is cleared automatically.

LRCLK stop flag valid or invalid selection

Default = 0h

Select Address	Value	Operation
&h07 [3]	0	Valid
	1	Invalid

BCLK stop flag valid or invalid selection

Default = 0h

Select Address	Value	Operation
&h08 [7]	0	Valid
	1	Invalid

6-2 Synchronous blank detection

As for synchronous blank detecting function, it detects as synchronous blank error when it counts between the rising edges of LRCK with internal clock (49.152MHz), and it shifts more than the definite value, and whether PLL is normally locked is judged.

Input sampling frequency	32kHz, 44.1kHz, 48kHz
Count value (Start of counting from 0)	1023

As for the detection result, reading from the register is possible. As a result of the judgment as synchronous blank once, it is not cleared until a clear command is transmitted even if the state of the clock returns normally. Moreover, the setting of the detection approval frequency is also possible, and if the error more than the predetermined number is detected, the flag (&h06[1]) becomes "1" by the command.

Synchronous blank flag reading register (Read Only)

Select Address	Value	Explanation of operation
&h06 [1]	0	Normal
	1	Synchronous blank detect

Synchronous blank flag clear register(Write Only)

Select Address	Explanation of operation
&h06 [0]	When "1" is written, the synchronous blank flag is cleared.

*When the clock stop automatic return function (Chapter 7) is used, these flags are cleared by the automatic operation.

Synchronous blank count setting
Default = 2h

Select Address	Explanation of operation
&h06 [6:4]	1 or more is set. (It should be set from 1 to 7) If synchronous blank more than the set number of count is detected, & h06[1] becomes "1".

6-3 BCLK high or low speed detection

BCLK high or low speed detection function is that judge BCLK speed being too high or low by measuring by using internal clock(12MHz to 25MHz).

When using a BCLK speed detection, speed failure detection can be more correctly performed by making a command set reflect about an input sample rate.

When you validate sample rate setting, please be sure to set up the sample ring rate inputted with &h0c [1:0] command. A high speed and the low-speed detection flag can set up validity and the disabled, respectively, and if the validated flag is materialized, mute (mute instantly) will be carried out.

Valid or invalid frequency value setting up by &h0C[1:0] command.
Default = 0h

Select Address	Value	Operation
&h0A [3]	0	Valid
	1	Invalid

Setting of sampling rate
Default = 0h

Select Address	Value	Operation
&h0C [1:0]	0	48kHz
	1	44.1kHz
	2	32kHz

The constraints of a high speed or a low-speed condition
Default = 0h

Select Address	Value	Operation
&h0A [2]	0	±10%
	1	±20%

We can check detection result by reading back.

The result judged that is once unusual is not cleared until it transmits a clear command, even if the condition of a clock returns to normal. We can set up

We can set up the constraints of the count of formation, and it does not set a flag until it detects it by count continuation.

BCLK high speed flag(Read Only)

Select Address	Value	Operation
&h0A [1]	0	Normal
	1	High speed detection flag

BCLK low speed flag(Read Only)

Select Address	Value	Operation
&h0B [1]	0	Normal
	1	Low speed detection flag

High speed detection clears register(Write Only)

Select Address	Operation
&h0A [0]	If "1" writes in, a high speed detection flag will be cleared.

※When using a clock shutdown auto return facility (Chapter 7), the above-mentioned flag is cleared automatically.

Low speed detection clear register(Write Only)

Select Address	Operation
&h0B [0]	If "1" writes in, a high speed detection flag will be cleared.

※When using a clock shutdown auto return facility (Chapter 7), the above-mentioned flag is cleared automatically.

A constraint of the count of judging with high speed flag detection

Default = 2h

Select Address	Operation
&h0A [6:4]	Please set up one or more. (1-7 are set up) A will become "&h0A[1]=1" if the BCLK high speed condition more than the count of setting up is detected continuously.

A constraint of the count of judging with low speed flag detection

Default = 2h

Select Address	Operation
&h0B [6:4]	Please set up one or more. (1-7 are set up) A will become "&h0B[1]=1" if the BCLK low speed condition more than the count of setting up is detected continuously.

High speed detection flag valid or invalid

Default = 0h

Select Address	Value	Operation
&h0A [7]	0	Valid
	1	Invalid

Low speed detection flag valid or invalid

Default = 0h

Select Address	Value	Operation
&h0B [7]	0	Valid
	1	Invalid

The frequency range of BCLK by which high speed detection or low speed detection is carried out becomes below.

Setting1	Setting2	Low speed	High speed
10% (&h0A[2]=0)	48kHz (&h0C[1:0]=0)	Under 20.0k to 41.3kHz	Over 55.6k to 111.4kHz
	44.1kHz (&h0C[1:0]=1)	Under 18.9k to 38.0kHz	Over 51.1k to 102.4kHz
	32kHz (&h0C[1:0]=2)	Under 13.7k to 27.6kHz	Over 37.1k to 74.3kHz
20% (&h0A[2]=1)	48kHz (&h0C[1:0]=0)	Under 19.2k to 38.4kHz	Over 62.4k to 128.4kHz
	44.1kHz (&h0C[1:0]=1)	Under 17.6k to 35.3kHz	Over 57.3k to 114.7kHz
	32kHz (&h0C[1:0]=2)	Under 12.8k to 25.6kHz	Over 41.6k to 83.2kHz

7. Auto recovery from clock error function

Detection flag and a BCLK high speed, and low speed detection flag formation, it will be in a mute condition (mute instantly) about an output.

In that case, if the clock error auto return facility is enabled, when it returns to a normal input, a mute condition will be canceled automatically.

When the clock error auto return facility is repeated, it is necessary to control a series of operations called a mute-on and flag clear command transmission, an internal-RAM-data clear, and mute release from an external microcomputer.

Since it is invalid immediately after a wake-up, &h0D[6] =1 is set up before mute release, and it recommends validating.

Valid or invalid auto recover from clock error

Default = 0h

Select Address	Value	Operation
&h0D [6]	0	Invalid
	1	Valid

Each error flag can be read from the following addresses. When 1 is read from a read address, the error flag stands. Moreover, a flag is not cleared until it writes 0 in the target address, even if error status will be canceled, once a flag leaves.

Error flag read register

Select Address	Operation
&h0E [6]	Asynchronous flag
&h0E [4]	LRCLK stop flag
&h0E [3]	BCLK stop flag
&h0E [2]	BCLK high speed detection flag
&h0E [1]	BCLK low speed detection flag

8. The wake-up Procedure of power-up


It recommends starting power-up in the following Procedures.

1. Power up
 - Wait over 10msec
2. Release reset (RSTX=H)
3. &h0C[1:0]=*h : Sampling rate (Please set up 0h in the case of 48kHz, set up 1h in the case of 44.1kHz and 2h in 32kHz.)
 - Please input BCLK and LRCLK
4. &hE9=10h : changing clock to normal state
 - Wait over 5msec
5. &h0x01=00h : Set RAM clear OFF
6. &h0D[6]=1h : Valid auto recover from clock error
7. &h0E[7:1]=0h : Clear error flag
8. &h92[4:0]=11h : PWM setting1
9. &h93[4:0]=1Ch : PWM setting2
10. &h94[4:0]=15h : PWM setting3
11. &h95[4:0]=04h : PWM setting4
12. Please set up DSP function such as volume, PEQ, DRC, and Scaler etc.
13. MUTEX=H : Release mute


9. The operating procedure in a status with an unstable clock

In the segment where the input of I2S signal of BCLK, LRCLK, and SDATA may become unstable, please set to MUTEX=L and carry out mute.

- 1.MUTEX=L
- After stabilizing I2S input, it is 20 ms or more WAIT.
- 2.MUTEX=H

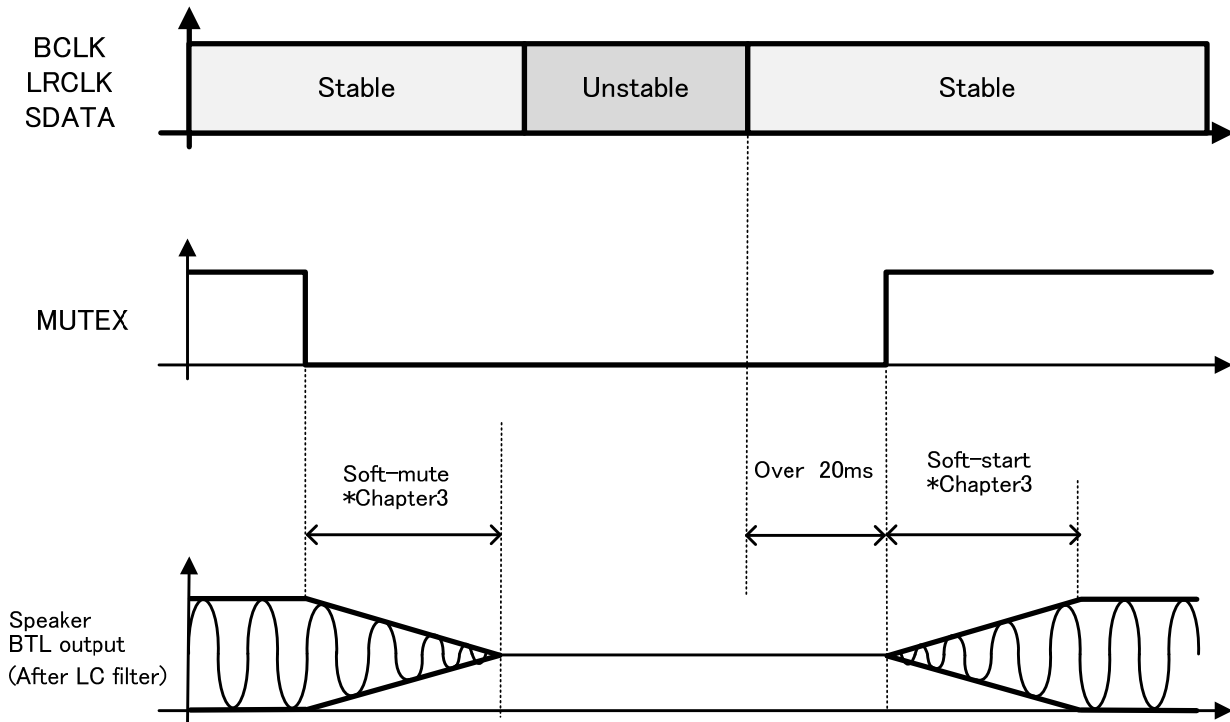

● Application Circuit Example (Stereo BTL output, $R_{L1}=8\Omega$)

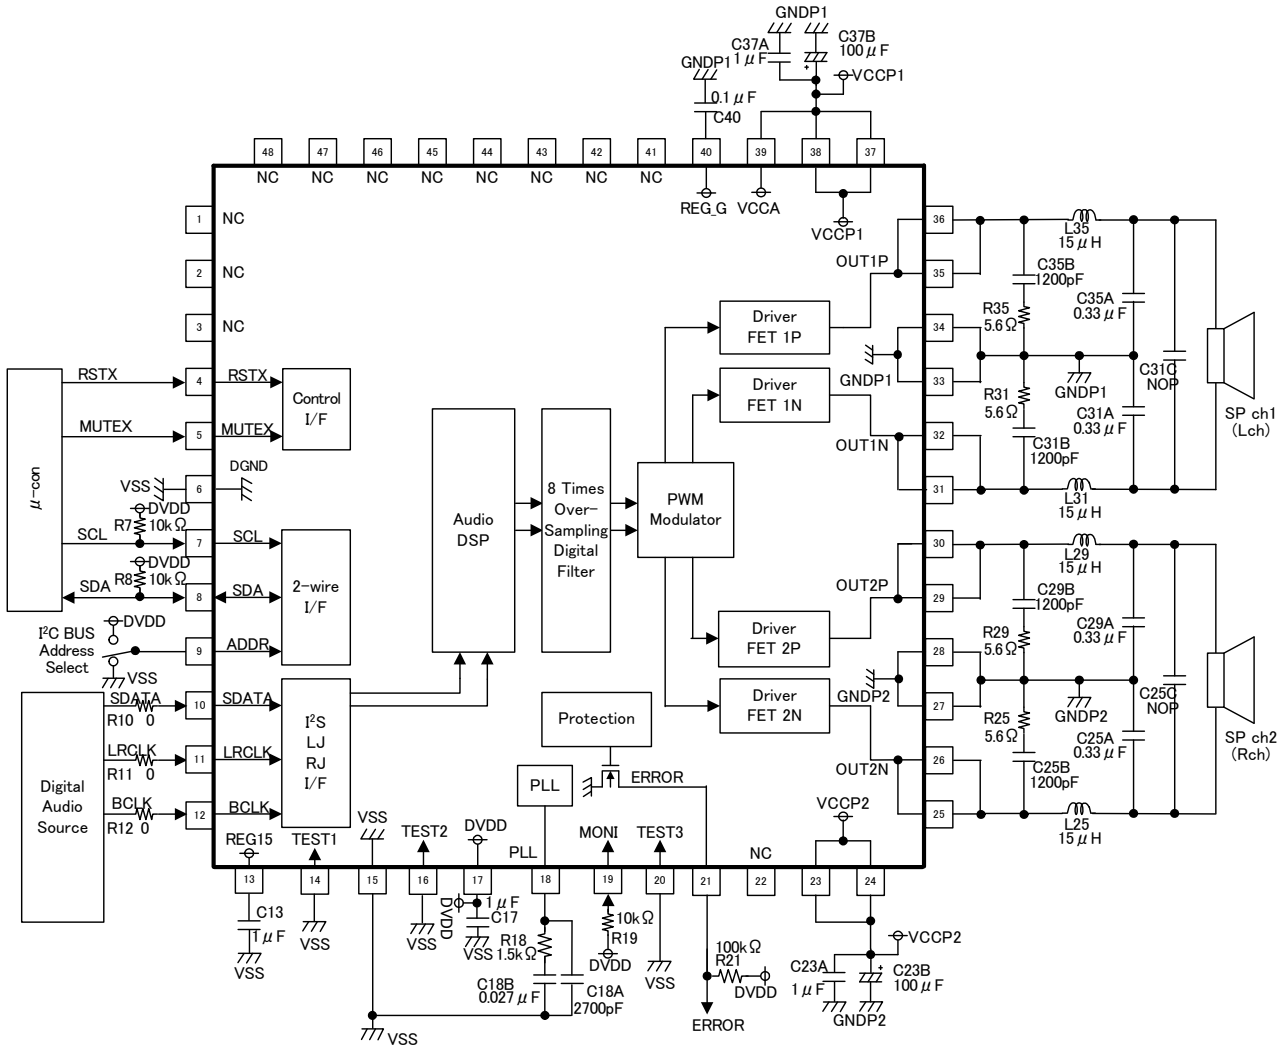


● BOM list (Stereo BTL output, $R_{L1}=8\Omega$)

Parts	Parts No.	Value	Company	Product No.	Rated Voltage	Tolerance	Size
Inductor	L25, L29, L31, L35	15uH	TOKO	B1047AS-150M	-	(±20%)	7.6mm×7.6mm
Resistor	R25, R29 R31, R35	5.6Ω	ROHM	MCR03EZPJ5R6	1/10W	J(±5%)	1.6mm×0.8mm
	R18	1.5kΩ		MCR01MZPF1501	1/16W	F(±1%)	1.0mm×0.5mm
	R7, R8, R19	10kΩ		MCR01MZPJ1002	1/16W	J(±5%)	1.0mm×0.5mm
	R21	100kΩ		MCR01MZPJ1003	1/16W	J(±5%)	1.0mm×0.5mm
	Capacitor	C25B, C29B C31B, C35B		1200pF	MURATA	GRM188B11H122KA01	50V
C18A	2700pF	GRM033B10J272KA01	6.3V	B(±10%)		0.6mm×0.3mm	
C18B	0.027uF	GRM033B10J273KE01	6.3V	B(±10%)		0.6mm×0.3mm	
C25A, C29A, C31A, C35A,	0.33uF	GRM219B31H34KA87	50V	B(±10%)		2.0mm×1.25mm	
C23A, C37A ※	1uF	GRM21BB31H105KA12	50V	B(±10%)		2.0mm×1.25mm	
C13, C17	1uF	GRM185B31A105KE43	10V	B(±10%)		1.6mm×0.8mm	
C40	0.1uF	GRM188B11A104KA92D	10V	B(±10%)		1.6mm×0.8mm	
C23B, C37B	100uF	PANASONIC	ECA1VMH101	35V		±20%	φ8mm×11.5mm

※Please put the C23A and C37A near the VCCP1 and VCCP2 pins on the board.

●Application Circuit Example (Monaural BTL output, $R_{L1}=8\Omega$)

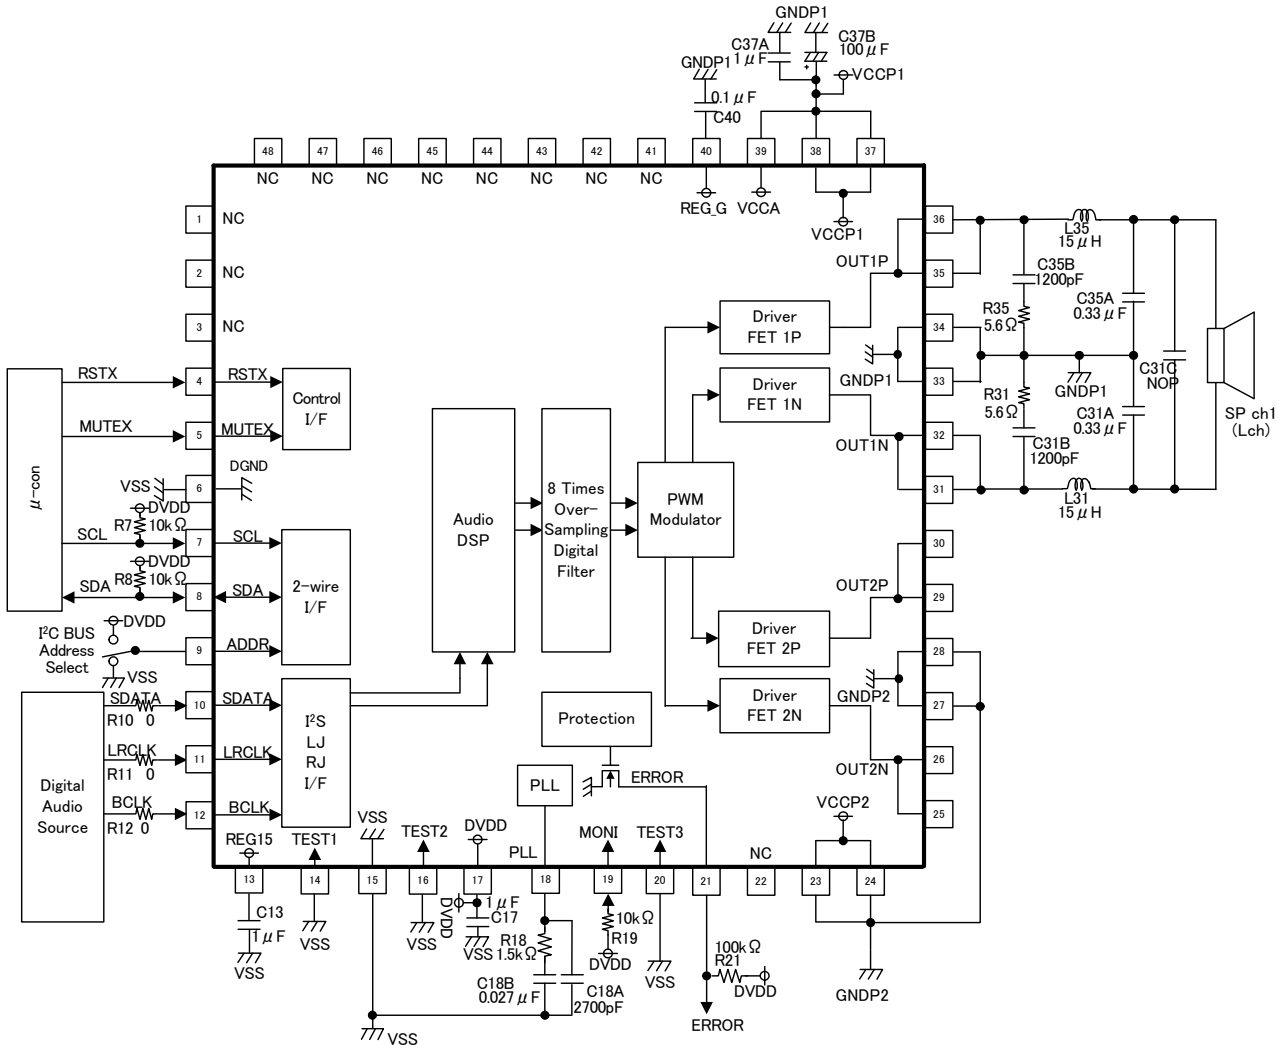

●BOM list (Monaural BTL output, $R_{L1}=8\Omega$)

Parts	Parts No.	Value	Company	Product No.	Rated Voltage	Tolerance	Size
Inductor	L31, L35	15uH	TOKO	B1047AS-150M	-	(±20%)	7.6mm×7.6mm
Resister	R31, R35	5.6Ω	ROHM	MCR03EZPJ5R6	1/10W	J(±5%)	1.6mm×0.8mm
	R18	1.5kΩ		MCR01MZPF1501	1/16W	F(±1%)	1.0mm×0.5mm
	R7, R8, R19	10kΩ		MCR01MZPJ1002	1/16W	J(±5%)	1.0mm×0.5mm
	R21	100kΩ		MCR01MZPJ1003	1/16W	J(±5%)	1.0mm×0.5mm
Capacitor	C31B, C35B	1200pF	MURATA	GRM188B11H122KA01	50V	B(±10%)	1.6mm×0.8mm
	C18A	2700pF		GRM033B10J272KA01	6.3V	B(±10%)	0.6mm×0.3mm
	C18B	0.027uF		GRM033B10J273KE01	6.3V	B(±10%)	0.6mm×0.3mm
	C31A, C35A,	0.33uF		GRM219B31H34KA87	50V	B(±10%)	2.0mm×1.25mm
	C37A ※	1uF		GRM21BB31H105KA12	50V	B(±10%)	2.0mm×1.25mm
	C13, C17	1uF		GRM185B31A105KE43	10V	B(±10%)	1.6mm×0.8mm
	C40	0.1uF		GRM188B11A104KA92D	10V	B(±10%)	1.6mm×0.8mm
	C37B	100uF	PANASONIC	ECA1VMH101	35V	±20%	φ8mm×11.5mm


※Please put the C37A near the VCCP1 pins on the board.

● Selection of Components Externally Connected

1) Output LC Filter Circuit

An output filter is required to eliminate radio-frequency components exceeding the audio-frequency region supplied to a load (speaker). Because this IC uses sampling clock frequencies from 256kHz($f_s=32\text{kHz}$) to 384kHz($f_s=48\text{kHz}$) in the output PWM signals, the high-frequency components must be appropriately removed.

This section takes an example of an LC type LPF shown below, in which coil L and capacitor C compose a differential filter with an attenuation property of -12dB/oct. A large part of switching currents flow to capacitor C, and only a small part of the currents flow to speaker R_{L1} . This filter reduces unwanted emission this way. In addition, coil L and capacitor Cg composes a filter against in-phase components, reducing unwanted emission further.

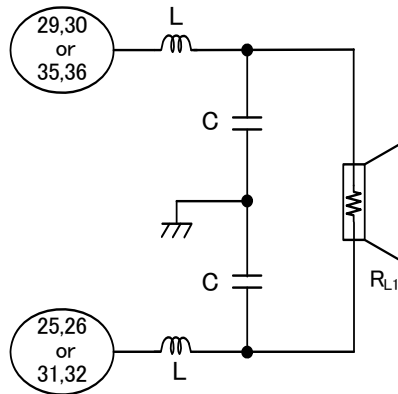

Following presents output LC filter constants with typical load impedances.

R_L	L	C
$4\ \Omega$	$10\ \mu\text{H}$	$1\ \mu\text{F}$
$6\ \Omega$	$10\ \mu\text{H}$	$0.33\ \mu\text{F}$
$8\ \Omega$	$15\ \mu\text{H}$	$0.33\ \mu\text{F}$

Use coils with a low direct-current resistance and with a sufficient margin of allowable currents. A high direct-current resistance causes power losses. In addition, select a closed magnetic circuit type product in normal cases to prevent unwanted emission.

Use capacitors with a low equivalent series resistance, and good impedance characteristics at high frequency ranges (100kHz or higher). Also, select an item with sufficient withstand voltage because flowing massive amount of high-frequency currents is expected.

2) The value of the LC filter circuit computed equation

The output LC filter circuit of BD5452AMUV is as it is shown in Figure .33. The LC filter circuit of Figure .33 is thought to substitute it like Figure .34 on the occasion of the computation of the value of the LC filter circuit.

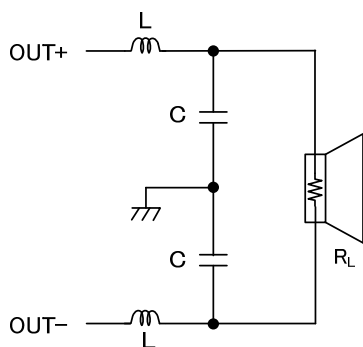


Figure .33 Output LCfilter 1

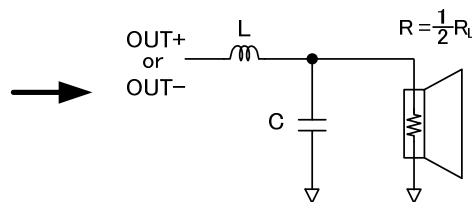


Figure .34 Output LCfilter 2

The transfer function H(s) of the LC filter circuit of Figure-34 becomes the following.

$$H(s) = \frac{\frac{1}{LC}}{s^2 + \frac{1}{CR}s + \frac{1}{LC}} = \frac{\omega^2}{s^2 + \frac{\omega}{Q}s + \omega^2}$$

The ω and Q become the followings here.

$$\omega^2 = \frac{1}{LC} \quad \omega = 2\pi f_{CL} \quad f_{CL} = \frac{1}{2\pi\sqrt{LC}}$$

$$Q = R\sqrt{\frac{C}{L}} = \frac{1}{2}R_L\sqrt{\frac{C}{L}}$$

Therefore, L and C become the followings.

$$L = \frac{1}{\omega^2 C} = \frac{R_L}{4\pi^2 f_{CL}^2 Q} \quad C = \frac{Q}{\omega R} = \frac{Q}{\pi f_{CL} R_L}$$

The R_L and L should be made known, and f_{CL} is set up, and C is decided.

3) The settlement of the L value of the coil

A standard for selection of the L value of a coil to use is to take the following back anti-matter into consideration except for the factor such as a low cost-ization, miniaturization, pale pattern.

①When L value was made small.

- (1) Circuit electric currents increase without a signal. And, efficiency in the low output gets bad.
- (2) Direct current resistance value is restrained small when the coil of other L value and size are made the same. Therefore, maximum output is easy to take out. And, it can be used in the low power supply voltage because DC electric current (allowable electric current) value can be taken greatly.

②When L value was made large.

- (1) Circuit electric current is restrained low without a signal. Efficiency in the low output improves.
- (2) Direct current resistance value grows big when the coil of other L value and size are made the same. Therefore, maximum output is hard to take out. And, because it becomes small, use becomes difficult 【 the DC electric current (allowable electric current) value 】 in the low power supply voltage, too.

4) The settlement of the f_{CL}

As for the settlement of the fixed number of the LC filter circuit, it is taken into consideration about two points of the following, and set up.

①The PWM sampling frequency f_{PWM} (=8fS) of BM5480MUV is set up in 384kHz (@fS=48kHz).

It is set up with $f_C < f_{PWM}$ to restrain career frequency omission after the LC filter circuit.

②When f_C is lowered too much, the voltage profit of the voice obi stage (especially, the neighborhood of 20kHz) declines in the speaker output frequency character of the difference movement mode.

And, the speaker output frequency character of the difference movement mode becomes the following.

RL=8Ω				RL=6Ω				RL=4Ω			
L[μH]	C[μF]	fc[kHz]	Q	L[μH]	C[μF]	fc[kHz]	Q	L[μH]	C[μF]	fc[kHz]	Q
10	0.1	75.32	0.40	10	0.1	51.01	0.30	10	0.1	32.19	0.20
	0.15	80.85	0.49		0.15	54.76	0.37		0.15	33.35	0.24
	0.22	86.79	0.59		0.22	56.73	0.44		0.22	34.55	0.30
	0.33	89.92	0.73		0.33	63.1	0.54		0.33	35.8	0.36
	0.47	86.79	0.87		0.47	66.68	0.65		0.47	38.37	0.43
	1.0	69.01	1.26		1.0	62.29	0.95		1.0	44.1	0.63
15	0.1	46.99	0.33	15	0.1	33.11	0.24	15	0.1	21.68	0.16
	0.15	49.66	0.40		0.15	34.36	0.30		0.15	22.08	0.20
	0.22	53.46	0.48		0.22	35.65	0.36		0.22	22.49	0.24
	0.33	57.54	0.59		0.33	38.37	0.44		0.33	22.91	0.30
	0.47	59.7	0.71		0.47	41.3	0.53		0.47	23.77	0.35
	1.0	52.75	1.03		1.0	44.67	0.77		1.0	27.47	0.52
22	0.1	30.76	0.27	22	0.1	22.49	0.20	22	0.1	14.72	0.13
	0.15	31.92	0.33		0.15	22.91	0.25		0.15	14.72	0.17
	0.22	33.73	0.40		0.22	23.77	0.30		0.22	15	0.20
	0.33	36.31	0.49		0.33	24.66	0.37		0.33	15.28	0.24
	0.47	39.08	0.58		0.47	26.06	0.44		0.47	15.56	0.29
	1.0	39.30	0.85		1.0	30.05	0.64		1.0	17.33	0.43

5) About the EMI countermeasure

As a part EMI countermeasure except for the output LC filter recommended with P.81/93 to P.82/93, It can be confirmed with following;

- Chip Common Mode Choke Coil(DLY5ATN401) manufactured by Murata +1000pF(50V,Tolerance:B,1608),
- Chip inductor LCC3225T2R2MR manufactured by TAIYOUDEN +1000pF(50V,Tolerance:B,1608)

6) The settlement of the snubber

The Snubber circuit must be optimized for application circuit to reduce the overshoot and undershoot of output PWM.

- ① Measure the spike resonance frequency f_1 of the PWM output wave shape (When it stands up.) by using FET probe in the OUT terminal. (Figure. 35) The FET probe is to monitor very near pin and shorten ground lead at the time of that.
- ② Measure resonance frequency f_2 of the spike as a snubber circuit fixed number $R=0\Omega$ (Only with the condenser C, to connect GND) At this time, the value of the condenser C is adjusted until it becomes half of the frequency ($2f_2=f_1$) of the resonance frequency f_1 of ①. The value of C which it could get here is three times of the parasitic capacity C_p that a spike is formed. ($C=3C_p$)
- ③ Parasitic inductance L_p is looked for at the next formula.

$$L_p = \frac{1}{(2\pi f_1)^2 C_p}$$

- ④ The character impedance Z of resonance is looked for from the parasitic capacity C_p and the parasitism inductance L_p at the next formula.

$$Z = \sqrt{\frac{L_p}{C_p}}$$

- ⑤ A snubber circuit fixed number R is set up in the value which is the same as the character impedance Z. A snubber circuit fixed number C is set up in the value of 4-10 times of the parasitic capacity C_p . ($C=4C_p$ to $10C_p$) Decide it with trade-off with the character because switching electric currents increase when the value of C is enlarged too much.

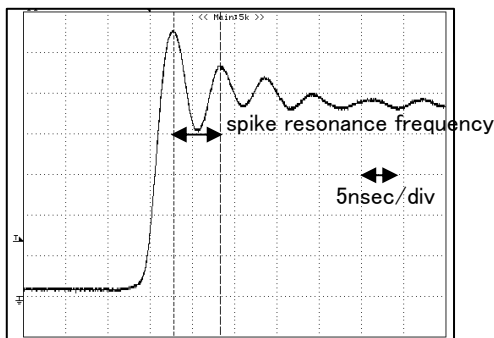


Figure .35 PWM Output waveform (measure of spike resonance frequency)

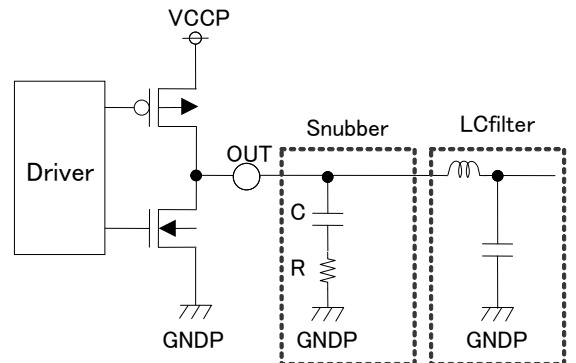


Figure .36 snubber schematic

Following presents Snubber filter constants with the recommendation value at ROHM 4 layer board.

R_L	C25B,C29B, C31B,C35B	R25,R29, R31,R35
4 Ω	3300pF	5.6 Ω
6 Ω	3300pF	5.6 Ω
8 Ω	1200pF	5.6 Ω

●Level Diagram of Audio Signal

Level diagram of audio signal is shown the below figure. Speaker output level is depended on I2S digital audio input level, DSP gain, PWM gain, BTL gain and Loss of power stage and low pass filter.
 I2S input level is full-scale signal, the supply voltage of the block is DVDD, therefore, 0dBFS is equal to DVDD voltage [Vpp]. DSP gain is set by 2 wire control variably, and -0.5dB is set at PWM Modulator block usually. At the Power stage, the PWM Modulator output is shifted PWM signal level from DVDD to VCC, and added loss of the output transistor resistance rDS and DC resistance of coil rDC.

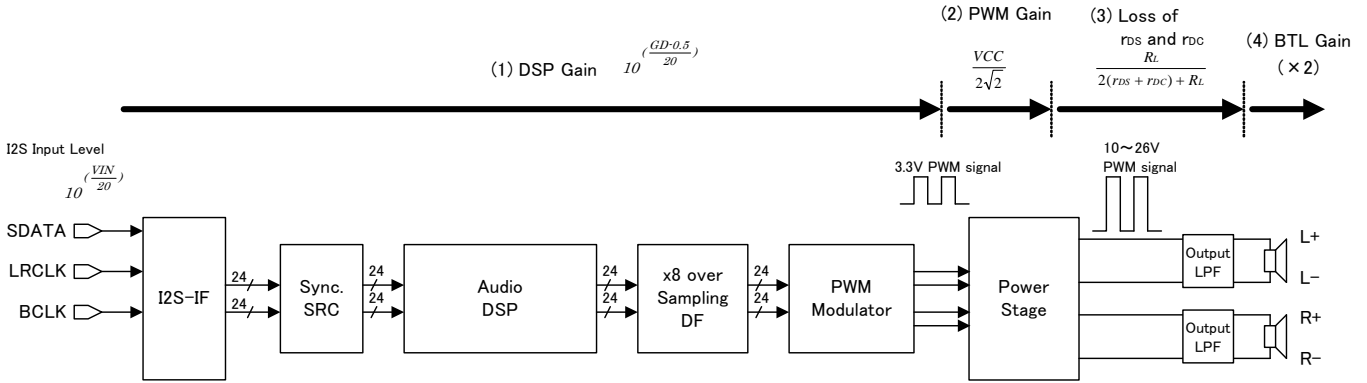


Figure.37 : Level Diagram of Audio Signal

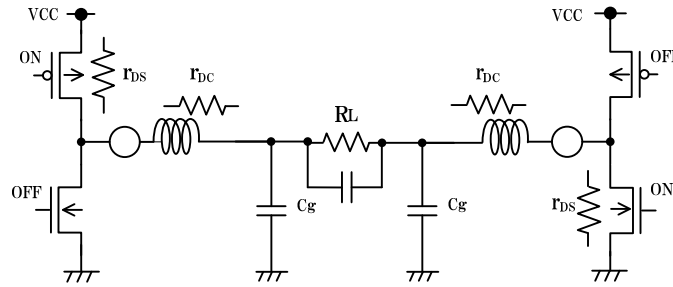


Figure.38 : Output LPF circuit

In Bridge-Tied-Load (BTL) connection, the following formula gives an approximate value of output power P_o at non-clipping output waveform:

$$P_o = \frac{\left(10^{\frac{VIN}{20}} \times 10^{\frac{(GD-0.5)}{20}} \times \frac{VCC}{2\sqrt{2}} \times 2 \times \frac{R_L}{2 \times (r_{DS} + r_{DC}) + R_L} \right)^2}{R_L}$$


- VIN : I2S Input level [dBFS]
- GD : DSP gain [dB]
- VCC : Power supply voltage of Power stage [V]
- $DVDD$: Power supply voltage of DSP block [V]
- RL : Load impedance [Ω]
- rDS : Turn-on resistance of output MOS Tr. [Ω]
(*typ.*=180m Ω)
- rDC : DC resistance of output LPF coil [Ω]

If the circuit is driven further until an output waveform is clipped, an output power higher than that without distortion is obtained. In general a clipped output is quantified where "THD+N = 1% and 10%," and a maximum output power under that status is calculated by the following formula:

$$P_{O(1\%)} = \frac{\left(10^{(-0.5/20)} \times \frac{VCC}{\sqrt{2}} \times \frac{R_L}{2(r_{DS} + r_{DC}) + R_L} \right)^2}{R_L} [W]$$

$$P_{O(10\%)} = P_{O(1\%)} \times 1.25 [W]$$

● Power Dissipation (VQFN048V7070)

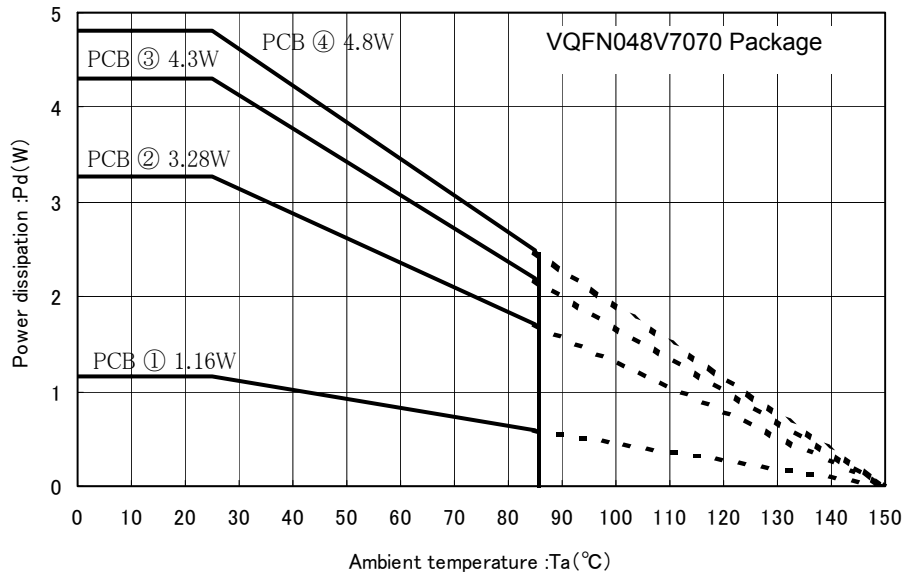

Measuring instrument: TH-156 (Shibukawa Kuwano Electrical Instruments Co., Ltd.)

Measuring conditions: Installation on ROHM's board

Board size: 114.3mm × 76.2mm × 1.6mm (with thermal via on board)

Material: FR4

- The board and exposed heat sink on the back of package are connected by soldering.

PCB (1): 1- layer board (back copper foil size: 34.09mm²), $\theta_{ja} = 107.8^{\circ}\text{C}/\text{W}$

PCB (2): 2- layer board (back copper foil size: 5505mm²), $\theta_{ja} = 38.1^{\circ}\text{C}/\text{W}$

PCB (3): 4- layer board (Top and bottom layer back copper foil size: 34.09mm², 2nd and 3rd layer back copper foil size: 5505mm²), $\theta_{ja} = 29.1^{\circ}\text{C}/\text{W}$

PCB (4): 4- layer board (back copper foil size: 5505mm²), $\theta_{ja} = 25.9^{\circ}\text{C}/\text{W}$

Use a thermal design that allows for a sufficient margin in light of the power dissipation (Pd) in actual operating conditions. This IC exposes its frame of the backside of package. Note that this part is assumed to use after providing heat dissipation treatment to improve heat dissipation efficiency. Try to occupy as wide as possible with heat dissipation pattern not only on the board surface but also the backside.

Full Digital speaker amplifier is high efficiency and low heat generation by comparison with conventional Analog power amplifier. However, In case it is operated continuously by maximum output power, Power dissipation (Pdiss) might exceed package dissipation. Please consider about heat design that Power dissipation (Pdiss) does not exceed Package dissipation (Pd) in average power (Poav). (T_{jmax} : Maximum junction temperature=150°C, T_a : Peripheral temperature[°C], θ_{ja} : Thermal resistance of package[°C/W], Poav : Average power[W], η : Efficiency)

Package dissipation : $P_d (W) = (T_{jmax} - T_a) / \theta_{ja}$

Power dissipation : $P_{diss} (W) = P_{oav} \times (1/\eta - 1)$

●I/O equivalence circuit (Provided pin voltages are typ. Values)

Pin No.	Pin name	Pin voltage	Pin explanation	Internal equivalence circuit
4	RSTX	0V	Reset pin for Digital circuit H:Reset OFF L:Reset ON	
5	MUTEX	0V	Speaker output mute control pin H:Mute OFF L:Mute ON	
6	DGND	0V	GND pin for Digital I/O	—
7	SCL	—	2 wire transmit clock input pin • Please notice. Absolute Maximum Voltage is 4.5V.	
8	SDA	—	2 wire data input/output pin • Please notice. Absolute Maximum Voltage is 4.5V.	
9	ADDR	0V	2 wire Slave address select pin	
10	SDATA	3.3V	Digital sound signal input pin	
11	LRCLK			
12	BCLK			
19	MONI	3.3V	TEST pin. Please pull up to DVDD.	
15	VSS	0V	GND pin for Digital block	—
18	PLL	1V	PLL's filter pin	

●I/O equivalence circuit (Provided pin voltages are typ. Values)

Pin No.	Pin name	Pin voltage	Pin explanation	Internal equivalence circuit
17	DVDD	3.3V	Power supply pin for Digital I/O.	—
14 16	TEST1 TEST2	— —	Test pin Please connect to VSS.	
13	REG15	1.5V	Internal power supply pin for Digital circuit	
20	TEST3	—	Test pin Please connect to VSS.	
21	ERROR	3.3V	Error flag pin H: While Normal L: While Error	
22 41 42 43 44 45 46 47 48 1 2 3	NC	—	Non Connection Pin	—

●I/O equivalence circuit (Provided pin voltages are typ. Values)

Pin No.	Pin name	Pin voltage	Pin explanation	Internal equivalence circuit
23 24	VCCP2	VCC	Power supply pin for ch2 PWM signal	
25 26	OUT2N	VCC ~ 0V	Output pin of ch2 positive PWM Please connect to Output LPF.	
27 28	GNDP2	0V	GND pin for ch2 PWM signal	
29 30	OUT2P	VCC ~ 0V	Output pin of ch2 negative PWM Please connect to Output LPF.	
31 32	OUT1N	VCC ~ 0V	Output pin of ch1 negative PWM Please connect to Output LPF.	
33 34	GNDP1	0V	GND pin for ch1 PWM signal	
35 36	OUT1P	VCC ~ 0V	Output pin of ch1 positive PWM Please connect to Output LPF.	
37 38	VCCP1	VCC	Power supply pin for ch1 PWM signal	
39	VCCA	VCC	Power supply pin for Analog signal	-
40	REG_G	5.5V	Internal power supply pin for gate driver Please connect the capacitor.	

●Operational Notes

1) Absolute maximum ratings

Use of the IC in excess of absolute maximum ratings such as the applied voltage or operating temperature range may result in IC damage. Assumptions should not be made regarding the state of the IC (short mode or open mode) when such damage is suffered. A physical safety measure such as a fuse should be implemented when use of the IC in a special mode where the absolute maximum ratings may be exceeded is anticipated.

2) Power supply lines

As return of current regenerated by back EMF of output coil happens, take steps such as putting capacitor between power supply and GND as an electric pathway for the regenerated current. Be sure that there is no problem with each property such as emptied capacity at lower temperature regarding electrolytic capacitor to decide capacity value. If the connected power supply does not have sufficient current absorption capacity, regenerative current will cause the voltage on the power supply line to rise, which combined with the product and its peripheral circuitry may exceed the absolute maximum ratings. It is recommended to implement a physical safety measure such as the insertion of a voltage clamp diode between the power supply and GND pins.

3) GND potential (Pin 6, 15, 27, 28, 33, 34)

Any state must become the lowest voltage about DGND, VSS, GNPD1 and GNPD2 terminal.

4) Input terminal

The parasitic elements are formed in the IC because of the voltage relation. The parasitic element operating causes the wrong operation and destruction. Therefore, please be careful so as not to operate the parasitic elements by impressing to input terminals lower voltage than DGND and VSS. Please do not apply the voltage to the input terminal when the power-supply voltage is not impressed.

5) Actions in strong magnetic field

Use caution when using the IC in the presence of a strong magnetic field as doing so may cause the IC to malfunction.

6) Thermal shutdown circuit

This product is provided with a built-in thermal shutdown circuit. When the thermal shutdown circuit operates, the output transistors are placed under open status. The thermal shutdown circuit is primarily intended to shut down the IC avoiding thermal runaway under abnormal conditions with a chip temperature exceeding $T_{jmax} = 150^{\circ}\text{C}$.

7) Shorts between pins and miss-installation

When mounting the IC on a board, pay adequate attention to orientation and placement discrepancies of the IC. If it is miss-installed and the power is turned on, the IC may be damaged. It also may be damaged if it is shorted by a foreign substance coming between pins of the IC or between a pin and a power supply or a pin and a GND.

8) Power supply on/off (Pin 23,24,37,38, 39)

In case power supply is started up, RSTX(Pin 4) and MUTEX(Pin 5) always should be set Low. And in case power supply is shut down, it should be set Low likewise. Then it is possible to eliminate pop noise when power supply is turned on/off. And also, all power supply terminals should start up and shut down together.

9) ERROR terminal (Pin 21)

An error flag is outputted when Output short protection or DC voltage protection. This flag is the function which the condition of this product is shown in.

10) N.C. terminal (Pin 22)

N.C. terminal (Non Connection Pin) does not connect to the inside circuit. Therefore, possible to use open.

11) TEST terminal (Pin 14, 16, 20)

TEST terminal connects with ground to prevent the malfunction by external noise.

12) Precautions for Speaker-setting

If the impedance characteristics of the speakers at high-frequency range while increase rapidly, the IC might not have stable-operation in the resonance frequency range of the LC-filter. Therefore, consider adding damping-circuit, etc., depending on the impedance of the speaker.

13) External capacitor

In order to use a ceramic capacitor as the external capacitor, determine the constant with consideration given to a degradation in the nominal capacitance due to DC bias and changes in the capacitance due to temperature, etc.

14) About the rush current


For ICs with more than one power supply, it is possible that rush current may flow instantaneously due to the internal powering sequence and delays. Therefore, give special consideration to power coupling capacitance, power wiring, width of GND wiring, and routing of wiring.

Status of this document

The Japanese version of this document is formal specification. A customer may use this translation version only for a reference to help reading the formal version.

If there are any differences in translation version of this document formal version takes priority

● Ordering Information




Package
MUV:
VQFN48V7070P

Packaging and forming specification
E2: Embossed tape and reel


● Physical Dimensions Tape and Reel Information

VQFN48V7070P

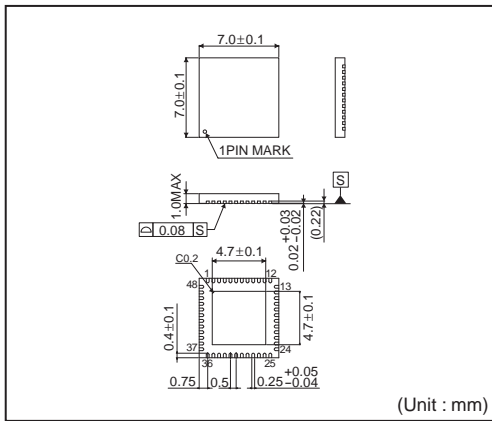


<Tape and Reel information>

Tape	Embossed carrier tape
Quantity	1500pcs
Direction of feed	E2 (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

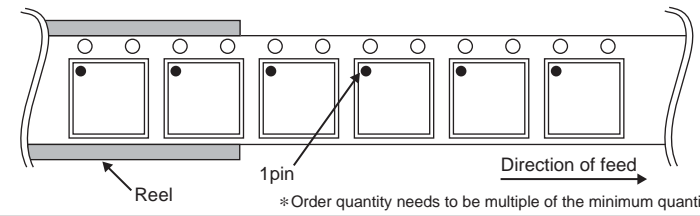

● Marking Diagram

VQFN48V7070P (TOP VIEW)

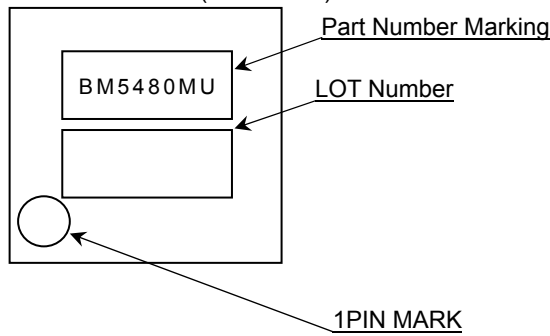

Notice

●General Precaution

- 1) Before you use our Products, you are requested to carefully read this document and fully understand its contents. ROHM shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any ROHM's Products against warning, caution or note contained in this document.
- 2) All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using ROHM's Products, please confirm the latest information with a ROHM sales representative.

●Precaution on using ROHM Products

- 1) Our Products are designed and manufactured for application in ordinary electronic equipments (such as AV equipment, OA equipment, telecommunication equipment, home electronic appliances, amusement equipment, etc.). If you intend to use our Products in devices requiring extremely high reliability (such as medical equipment, transport equipment, traffic equipment, aircraft/spacecraft, nuclear power controllers, fuel controllers, car equipment including car accessories, safety devices, etc.) and whose malfunction or failure may cause loss of human life, bodily injury or serious damage to property ("Specific Applications"), please consult with the ROHM sales representative in advance. Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of any ROHM's Products for Specific Applications.
- 2) ROHM designs and manufactures its Products subject to strict quality control system. However, semiconductor products can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against the physical injury, damage to any property, which a failure or malfunction of our Products may cause. The following are examples of safety measures:
 - [a] Installation of protection circuits or other protective devices to improve system safety
 - [b] Installation of redundant circuits to reduce the impact of single or multiple circuit failure
- 3) Our Products are designed and manufactured for use under standard conditions and not under any special or extraordinary environments or conditions, as exemplified below. Accordingly, ROHM shall not be in any way responsible or liable for any damages, expenses or losses arising from the use of any ROHM's Products under any special or extraordinary environments or conditions. If you intend to use our Products under any special or extraordinary environments or conditions (as exemplified below), your independent verification and confirmation of product performance, reliability, etc. prior to use, must be necessary:
 - [a] Use of our Products in any types of liquid, including water, oils, chemicals, and organic solvents
 - [b] Use of our Products outdoors or in places where the Products are exposed to direct sunlight or dust
 - [c] Use of our Products in places where the Products are exposed to sea wind or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - [d] Use of our Products in places where the Products are exposed to static electricity or electromagnetic waves
 - [e] Use of our Products in proximity to heat-producing components, plastic cords, or other flammable items
 - [f] Sealing or coating our Products with resin or other coating materials
 - [g] Use of our Products without cleaning residue of flux (even if you use no-clean type fluxes, cleaning residue of flux is recommended); or Washing our Products by using water or water-soluble cleaning agents for cleaning residue after soldering
 - [h] Use of the Products in places subject to dew condensation
- 4) The Products are not subject to radiation-proof design.
- 5) Please verify and confirm characteristics of the final or mounted products in using the Products.
- 6) In particular, if a transient load (a large amount of load applied in a short period of time, such as pulse) is applied, confirmation of performance characteristics after on-board mounting is strongly recommended. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.
- 7) De-rate Power Dissipation (Pd) depending on Ambient temperature (Ta). When used in sealed area, confirm the actual ambient temperature.
- 8) Confirm that operation temperature is within the specified range described in the product specification.
- 9) ROHM shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

● **Precaution for Mounting / Circuit board design**

- 1) When a highly active halogenous (chlorine, bromine, etc.) flux is used, the residue of flux may negatively affect product performance and reliability.
- 2) In principle, the reflow soldering method must be used; if flow soldering method is preferred, please consult with the ROHM representative in advance.

For details, please refer to ROHM Mounting specification

● **Precautions Regarding Application Examples and External Circuits**

- 1) If change is made to the constant of an external circuit, please allow a sufficient margin considering variations of the characteristics of the Products and external components, including transient characteristics, as well as static characteristics.
- 2) You agree that application notes, reference designs, and associated data and information contained in this document are presented only as guidance for Products use. Therefore, in case you use such information, you are solely responsible for it and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.

● **Precaution for Electrostatic**

This Product is electrostatic sensitive product, which may be damaged due to electrostatic discharge. Please take proper caution in your manufacturing process and storage so that voltage exceeding the Products maximum rating will not be applied to Products. Please take special care under dry condition (e.g. Grounding of human body / equipment / solder iron, isolation from charged objects, setting of Ionizer, friction prevention and temperature / humidity control).

● **Precaution for Storage / Transportation**

- 1) Product performance and soldered connections may deteriorate if the Products are stored in the places where:
 - [a] the Products are exposed to sea winds or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - [b] the temperature or humidity exceeds those recommended by ROHM
 - [c] the Products are exposed to direct sunshine or condensation
 - [d] the Products are exposed to high Electrostatic
- 2) Even under ROHM recommended storage condition, solderability of products out of recommended storage time period may be degraded. It is strongly recommended to confirm solderability before using Products of which storage time is exceeding the recommended storage time period.
- 3) Store / transport cartons in the correct direction, which is indicated on a carton with a symbol. Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.
- 4) Use Products within the specified time after opening a humidity barrier bag. Baking is required before using Products of which storage time is exceeding the recommended storage time period.

● **Precaution for Product Label**

QR code printed on ROHM Products label is for ROHM's internal use only.

● **Precaution for Disposition**

When disposing Products please dispose them properly using an authorized industry waste company.

● **Precaution for Foreign Exchange and Foreign Trade act**

Since our Products might fall under controlled goods prescribed by the applicable foreign exchange and foreign trade act, please consult with ROHM representative in case of export.

● **Precaution Regarding Intellectual Property Rights**

- 1) All information and data including but not limited to application example contained in this document is for reference only. ROHM does not warrant that foregoing information or data will not infringe any intellectual property rights or any other rights of any third party regarding such information or data. ROHM shall not be in any way responsible or liable for infringement of any intellectual property rights or other damages arising from use of such information or data.:
- 2) No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the information contained in this document.

●Other Precaution

- 1) The information contained in this document is provided on an "as is" basis and ROHM does not warrant that all information contained in this document is accurate and/or error-free. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.
- 2) This document may not be reprinted or reproduced, in whole or in part, without prior written consent of ROHM.
- 3) The Products may not be disassembled, converted, modified, reproduced or otherwise changed without prior written consent of ROHM.
- 4) In no event shall you use in any way whatsoever the Products and the related technical information contained in the Products or this document for any military purposes, including but not limited to, the development of mass-destruction weapons.
- 5) The proper names of companies or products described in this document are trademarks or registered trademarks of ROHM, its affiliated companies or third parties.