NICHIA CORPORATION SPECIFICATIONS FOR UV LED

NSSU100CT

- Pb-free Reflow Soldering Application
- Built-in ESD Protection Device
- RoHS Compliant



SPECIFICATIONS

(1) Absolute Maximum Ratings

Item	Symbol	Absolute Maximum Rating	Unit
Forward Current	\mathbf{I}_{F}	25	mA
Pulse Forward Current	${ m I}_{\sf FP}$	80	mA
Allowable Reverse Current	I_{R}	85	mA
Power Dissipation	P _D	100	mW
Operating Temperature	T _{opr}	-30~85	°C
Storage Temperature	T _{stg}	-40~100	°C
Junction Temperature	T,	100	°C

^{*} Absolute Maximum Ratings at T_A =25°C.

(2) Initial Electrical/Optical Characteristics

Item	Symbol	Condition	Тур	Unit
Forward Voltage	V_{F}	I _F =20mA	3.6	V
Radiant Flux	Фе	I _F =20mA	4500	μW
Peak Wavelength	λp	I _F =20mA	365	nm
Spectrum Half Width	Δλ	I _F =20mA	15	nm

^{*} Characteristics at $T_A=25$ °C.

^{*} I_{FP} conditions with pulse width $\leq\!10\text{ms}$ and duty cycle $\leq\!10\%.$

 $^{^{}st}$ Radiant Flux value is traceable to the CIE 127:2007-compliant national standards.

RANKS

Item	Rank	Min	Max	Unit
Forward Voltage	-	-	4	V
Radiant Flux	8	6800	9600	
	7	4800	6800	μW
	6	3400	4800	
Peak Wavelength	Ua	360	370	nm

^{*} Ranking at $T_A=25$ °C.

The percentage of each rank in the shipment shall be determined by Nichia.

^{*} Tolerance of measurements of the Forward Voltage is ± 0.05 V.

^{*} Tolerance of measurements of the Radiant Flux is $\pm 10\%$.

^{*} Tolerance of measurements of the Peak Wavelength is ±3nm.


^{*} Basically, a shipment shall consist of the LEDs of a combination of the above ranks.


OUTLINE DIMENSIONS


Cathode

* 本製品はRoHS指令に適合しております。 This product complies with RoHS Directive. NSSU100C 管理番号 No. STS-DA7-1140


(単位 Unit: mm, 公差 Tolerance: ±0.2)

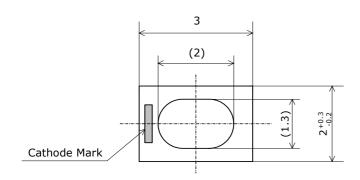






項目 Item	内容 Description	
パッケージ材質 Package Materials	セラミックス Ceramics	
封止樹脂材質 Encapsulating Resin Materials	シリコーン樹脂 Silicone Resin	
電極材質 Electrodes Materials	金メッキ Au-plated	
質量 Weight	0.020g(TYP)	



Anode


SOLDERING

• Recommended Reflow Soldering Condition(Lead-free Solder) • Recommended Manual Soldering Condition



Temperature	350°C Max
Soldering Time	3sec Max


• Recommended Soldering Pad Pattern




- * The product is designed to be reflow soldered to a PCB. If you use dip soldering for the products, Nichia cannot guarantee its reliability.
- * Reflow soldering must not be performed more than twice. Manual soldering must only be done once.
- * Care should be taken to avoid cooling at a rapid rate and ensure the peak temperature ramps down slowly.
- * Customer is advised to use nitrogen reflow soldering as air flow process can cause optical degradation due to the heat and atmosphere of reflow soldering.
- * Since silicone used as encapsulating resin in this product is a soft material, do not press on the encapsulant. Failure to comply might lead to nicks, chip-outs, delamination and deformation of the encapsulant, wire breakage and an adverse effect on product reliability.
- * Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used.
 - It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.
- * When soldering, avoid applying any stress to the LED package while heated.

TAPE AND REEL DIMENSIONS

Label

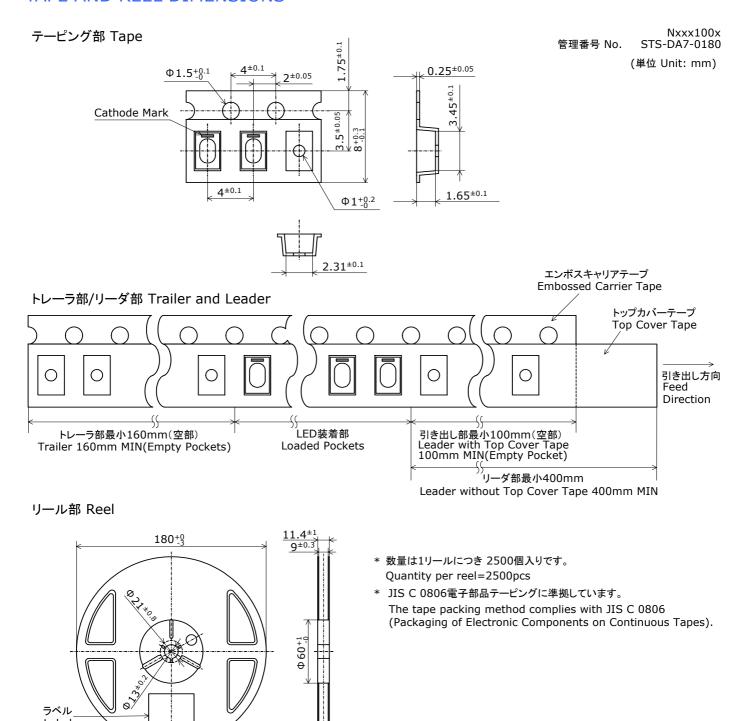

PACKAGING - TAPE & REEL

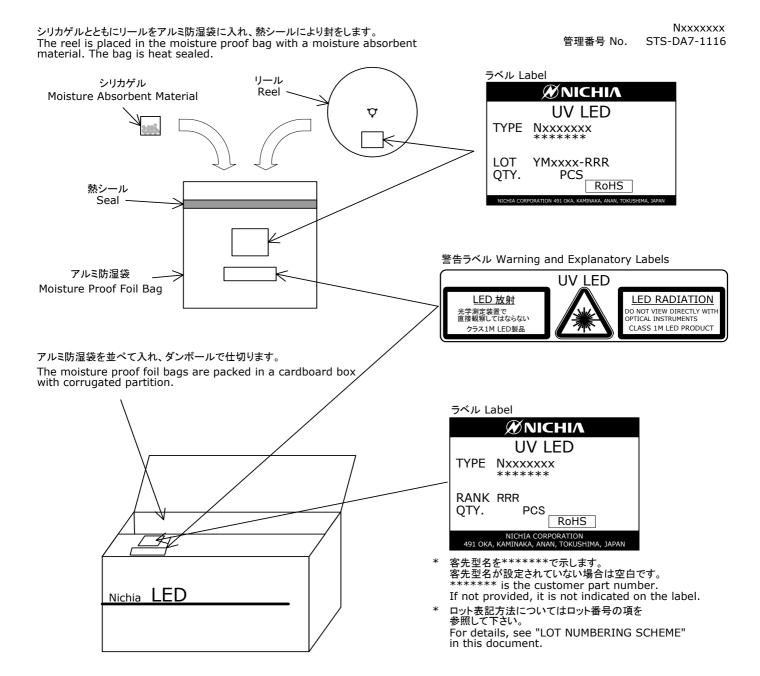

- * 本製品はテーピングしたのち、輸送の衝撃から保護するためダンボールで梱包します。
 The products are taped and reeled, and then packed in moisture-proof bags.
 The moisture-proof bags are packed in cardboard boxes to prevent damage during shipment.
- * 取り扱いに際して、落下させたり、強い衝撃を与えたりしますと、製品を損傷させる原因になりますので注意して下さい。 Do not drop the cardboard box or expose it to shock. If the box falls, the products could be damaged.
- * ダンボールには防水加工がされておりませんので、梱包箱が水に濡れないよう注意して下さい。 The cardboard box is not water-resistant. Do not expose to water.
- * 輸送、運搬に際して弊社よりの梱包状態あるいは同等の梱包を行って下さい。 Customer is advised to pack the products in the original packaging or equivalent in transit.

LOT NUMBERING SCHEME

Lot Number is presented by using the following alphanumeric code.

YMxxxx - RRR

Y - Year

Year	Y
2009	9
2010	А
2011	В
2012	C
2013	D
2014	Е

M - Month

Month	М	Month	М
1	1	7	7
2	2	8	8
3	3	9	9
4	4	10	Α
5	5	11	В
6	6	12	С


xxxx-Nichia's Product Number

RRR-Ranking by Wavelength, Ranking by Radiant Flux

NSSU100C 管理番号 No. STS-DA7-1146


周囲温度-許容順電流特性

Ambient Temperature vs **Allowable Forward Current**



デューティー比-許容順電流特性

Duty Ratio vs Allowable Forward Current 100




OPTICAL CHARACTERISTICS

* 本特性は参考です。 All characteristics shown are for reference only and are not guaranteed.


350

NSSU100C 管理番号 No. STS-DA7-1147

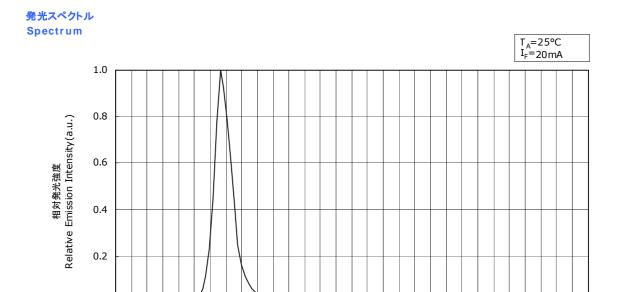

400

指向特性 Directivity 0.0 L

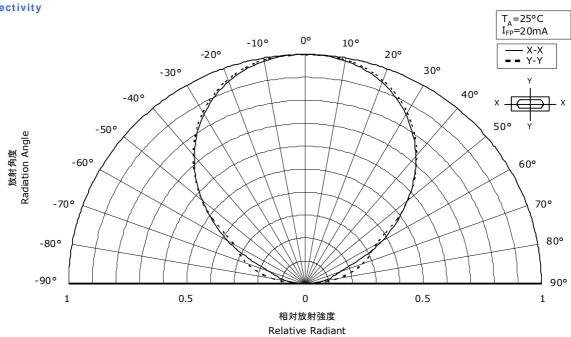

450 波長 Wavelength(nm) 500

550


600

FORWARD CURRENT CHARACTERISTICS / TEMPERATURE CHARACTERISTICS

* 本特性は参考です。 All characteristics shown are for reference only and are not guaranteed. NSSU100C 管理番号 No. STS-DA7-1148




Forward Voltage vs Forward Current




周囲温度-順電圧特性

Ambient Temperature vs Forward Voltage $I_{FP}=5$ mA $I_{FP}=2$ 0 mA $I_{FP}=6$ 0 mA




順電流-相対放射束特性

Forward Current vs



周囲温度-相対放射束特性

Ambient Temperature vs Relative Radiant Flux




Ambient Temperature(°C)

FORWARD CURRENT CHARACTERISTICS / TEMPERATURE CHARACTERISTICS


* 本特性は参考です。 NSSU100C All characteristics shown are for reference only and are not guaranteed. 管理番号 No. STS-DA7-1149





周囲温度-ピーク波長特性

Ambient Temperature vs Peak Wavelength



Ambient Temperature(°C)

RELIABILITY

(1) Tests and Results

Test	Reference Standard	Test Conditions	Test Duration	Failure Criteria #	Units Failed/Tested
Resistance to Soldering Heat (Reflow Soldering)	JEITA ED-4701 300 301	T _{sld} =260°C, 10sec, 2reflows, Precondition: 30°C, 70%RH, 168hr		#1	0/50
Solderability (Reflow Soldering)	JEITA ED-4701 303 303A	T _{sld} =245±5°C, 5sec, Lead-free Solder(Sn-3.0Ag-0.5Cu)		#2	0/50
Temperature Cycle	JEITA ED-4701 100 105	-40°C(30min)~25°C(5min)~ 100°C(30min)~25°C(5min)	100cycles	#1	0/50
Moisture Resistance (Cyclic)	JEITA ED-4701 200 203	25°C~65°C~-10°C, 90%RH, 24hr per cycle	10cycles	#1	0/50
High Temperature Storage	JEITA ED-4701 200 201	T _A =100°C	1000hours	#1	0/50
Temperature Humidity Storage	JEITA ED-4701 100 103	T _A =60°C, RH=90%	1000hours	#1	0/50
Low Temperature Storage	JEITA ED-4701 200 202	T _A =-40°C	1000hours	#1	0/50
Room Temperature Operating Life		T _A =25°C, I _F =25mA	1000hours	#1	0/50
High Temperature Operating Life		T _A =85°C, I _F =7.5mA	1000hours	#1	0/50
Temperature Humidity Operating Life		60°C, RH=90%, I _F =20mA	500hours	#1	0/50
Low Temperature Operating Life		T _A =-30°C, I _F =20mA	1000hours	#1	0/50
Vibration	JEITA ED-4701 400 403	200m/s ² , 100~2000~100Hz, 4cycles, 4min, each X, Y, Z	48minutes	#1	0/50
Board Bending	JEITA ED-4702B 003	1bend to a deflection of 3mm for 5±1sec		#1	0/50
Soldering Joint Shear Strength	JEITA ED-4702B 002 3	5N, 10±1sec		#1	0/50

NOTES:

Measurements are performed after allowing the LEDs to return to room temperature.

(2) Failure Criteria

Criteria #	Items	Conditions	Failure Criteria
	Forward Voltage(V _F)	I _F =20mA	>U.S.L.×1.1
#1	Radiant Flux(Φ_E)	I _F =20mA	<l.s.l.×0.7< td=""></l.s.l.×0.7<>
#2	Solderability	-	Less than 95% solder coverage

 $\hbox{U.S.L.: Upper Specification Limit} \qquad \hbox{L.S.L.: Lower Specification Limit}$

CAUTIONS

(1) Storage


	Conditions	Temperature	Humidity	Time
	Before Opening Aluminum Bag	≤30°C	≤90%RH	Within 1 Year from Delivery Date
Storage	After Opening Aluminum Bag	≤30°C	≤70%RH	≤168hours
Baking		65±5°C	-	≥24hours


- This product is compliant to JEDEC MSL 3 or equivalent. See IPC/JEDEC STD-020 for the details of the moisture sensitivity levels.
- Interface delamination can occur due to vaporization and expansion of absorbed moisture
 in the LED packages caused by soldering heat, which may result in degradation in optical performance.
 To minimize moisture absorption into the products during the transportation and storage, the products are packed
 in a moisture-proof aluminum bag. Desiccants (silica gel) inside the packing turn from blue to red as it absorbs moisture.
- After opening the moisture-proof aluminum bag, the products should be completed soldering process within the range of the conditions above. If unused LEDs remain, they should be stored with desiccants (silica gel) in hermetically sealed container. Nichia recommends using the original moisture-proof bag for storage.
- After the "Period After Opening" specified above, or if the desiccants (silica gel) are no longer blue, the products need to be baked.

 Note that baking must only be done once.
- Although the leads or electrode pads (anode and cathode) of the product are plated with gold,
 prolonged exposure to a corrosive environment might cause the gold plated the leads or electrode pads to tarnish,
 and thus leading to difficulties in soldering. If unused LEDs remain, they must be stored in a hermetically sealed container.
 Nichia recommends using the original moisture-proof bag for storage.
- Do not use sulfur-containing materials in commercial products. Some materials, such as seals and adhesives, may contain sulfur. The contaminated plating of LEDs might cause an open circuit. Silicone rubber is recommended as a material for seals. Bear in mind, the use of silicones may lead to silicone contamination of electrical contacts inside the products, caused by low molecular weight volatile siloxane.
- To avoid condensation, the products must not be stored in the areas where temperature and humidity fluctuate greatly.

(2) Directions for Use

• In designing a circuit, the current through each LED must not exceed the Absolute Maximum Rating specified for each LED. It is recommended to use Circuit B which regulates the current flowing through each LED. In the meanwhile, when driving LEDs with a constant voltage in Circuit A, the current through the LEDs may vary due to the variation in Forward Voltage characteristics of the LEDs.





- This product should be operated in forward bias. A driving circuit must be designed so that the product is not subjected to either forward or reverse voltage while it is off. In particular, if a reverse voltage is continuously applied to the product, such operation can cause migration resulting in LED damage.
- For stabilizing the LED characteristics, it is recommended to operate at 10% of the rated current or higher.
- For outdoor use, necessary measures should be taken to prevent water, moisture and salt air damage.
- This LED also emits visible light. Please take notice of visible light spectrum, in case you use this LED as light source of sensors etc.

(3) Handling Precautions

- When handling the product, do not touch it directly with bare hands as it may contaminate the surface and affect on optical characteristics. In the worst cases, excessive force to the product might result in catastrophic failure due to package damage and/or wire breakage.
- When handling the product with tweezers, make sure that excessive force is not applied to the resin portion of the product. Failure to comply can cause the resin portion of the product to be cut, chipped, delaminated and/or deformed, and wire to be broken, and thus resulting in catastrophic failure.
- If the product is dropped, it might be damaged.
- Do not stack assembled PCBs together. Failure to comply can cause the resin portion of the product to be cut, chipped, delaminated and/or deformed, and wire to be broken, and thus resulting in catastrophic failure.

(4) Design Consideration

- PCB warpage after mounting the products onto a PCB can cause the package to break.
 The LEDs should be placed so as to minimize the stress on the LEDs due to PCB bow and twist.
- The position and orientation of the LEDs affect how much mechanical stress is exerted on the LEDs placed near the score lines.

 The LEDs should be placed so as to minimize the stress on the LEDs due to board flexing.
- Board separation must be performed using special jigs, not with hands.
- If an aluminum PCB is used, customer is advised to verity the PCB with the products before use. Thermal stress during use can cause the solder joints to crack.

(5) Electrostatic Discharge (ESD)

• The products are sensitive to static electricity or surge voltage. An ESD event may damage its die or reduce its reliability performance. When handling the products, measures against electro static discharge, including the followings, are strongly recommended.

Eliminating the charge;

Wrist strap, ESD footwear and garments, ESD floors

Grounding the equipment and tools at workstation

ESD table/shelf mat (conductive materials)

- Proper grounding techniques are required for all devices, equipment and machinery used in the assembly of the products.

 Also note that surge protection should be considered in the design of customer products.
- If tools or equipment contain insulating materials, such as glass or plastic, proper measures against electro static discharge, including the followings, are strongly recommended.

Dissipating the charge with conductive materials

Preventing the charge generation with moisture

Neutralizing the charge with ionizers

- When performing the characteristics inspection of the LEDs in your application, customer is advised to check on the LEDs whether or not they are damaged by ESD. Such damage can be detected during forward voltage measurement at low current. (the recommended current is 1mA or lower)
- ESD-damaged LEDs may have a current flow at low voltage.

Failure Criteria: V_F <2.0V at I_F =0.5mA

(6) Thermal Management

• Thermal management is an important factor when designing your product by using the LEDs.

The rise in LED die temperature can be affected by PCB thermal resistance or/and LED spacing as mounted on the board. Customer is advised to design the product to ensure that the LED die temperature does not exceed the required maximum Junction Temperature (T_1) .

• Drive current should be determined for the surrounding ambient temperature (TA) to dissipate the heat from the product.

(7) Cleaning

- If required, isopropyl alcohol (IPA) should be used. Other solvents may cause premature failure to the LEDs due to the damage to the resin portion. The effects of such solvents should be verified prior to use.

 In addition, the use of CFCs such as Freon is heavily regulated.
- Ultrasonic cleaning is not recommended for the LEDs since it may adversely effect on the LEDs by the ultrasonic power and LED assembled condition.

If it is unavoidable, customer is advised to check prior to use that the cleaning will not damage the LEDs.

(8) Eye Safety

- The International Electrical Commission (IEC) published in 2006, IEC 62471:2006 Photobiological safety of lamps and lamp systems which includes LEDs within its scope. Meanwhile LEDs were removed from the scope of the IEC 60825-1:2007 laser safety standard, the 2001 edition of which included LED sources within its scope. However, keep it mind that some countries and regions have adopted standards based on the IEC laser safety standard IEC 60825-1:2001 which includes LEDs within its scope. Following IEC 62471:2006, most of Nichia LEDs can be classified as belonging to either Exempt Group or Risk Group 1. Especially a high-power LED, that emits light containing blue wavelengths, may be in Risk Group 2. Great care should be taken when viewing directly the LED driven at high current or the LED with optical instruments, which greatly increase the hazard to your eyes.
- Viewing a flashing light may cause eye discomfort. When incorporating the LED into your product, precaution should be taken to avoid adverse effect on human body caused by the light stimulus.
- The products are UV light LEDs, and radiate intense UV light during operation. Since UV light can be harmful to eyes,
 do NOT look directly into the UV light, even through an optical instrument. In case of the light reflection,
 UV protective glasses are required to use in order to avoid damage by the light.

(9) Others

- The LEDs described in this brochure are intended to be used for ordinary electronic equipment (such as office equipment, communications equipment, measurement instruments and household appliances).
 Consult Nichia's sales staff in advance for information on the applications in which exceptional quality and reliability are required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health (such as for airplanes, aerospace, submersible repeaters, nuclear reactor control system, automobiles, traffic control equipment, life support systems and safety devices).
- The customer shall not reverse engineer by disassembling or analysis of the LEDs without having prior written consent from Nichia. When defective LEDs are found, the customer shall inform Nichia directly before disassembling or analysis.
- Customer and Nichia shall agree the official specification of supplied products prior to the start of a customer's volume production.
- The appearance and specifications of the product may be modified for improvement without notice.