

G3VM-202J1

MOS FET Relays

Two Channels and an 8-pin SOP Package in 200-V Load Voltage Series.



- Continuous load current of 200 mA.

RoHS compliant




Note: The actual product is marked differently from the image shown here.

Application Examples

- Communication equipment
- Test & Measurement equipment
- Data loggers
- Amusement equipment

Terminal Arrangement/Internal Connections

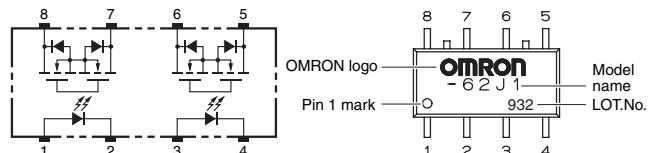

Note: The actual product is marked differently from the image shown here.

List of Models

Package type	Contact form	Terminals	Load voltage (peak value)*	Model	Minimum package quantity	
					Number per tube	Number per tape and reel
SOP8	2a (DPST-NO)	Surface-mounting Terminals	200 V	G3VM-202J1	50	-
				G3VM-202J1 (TR)	-	2,500

* The AC peak and DC value are given for the load voltage.

Absolute Maximum Ratings (Ta = 25°C)


Item		Symbol	Rating	Unit	Measurement conditions
Input	LED forward current	I _F	50	mA	
	Repetitive peak LED forward current	I _{FP}	1	A	100 µs pulses, 100 pps
	LED forward current reduction rate	ΔI _F /°C	-0.5	mA/°C	Ta ≥ 25°C
	LED reverse voltage	V _R	5	V	
Output	Connection temperature	T _J	125	°C	
	Load voltage (AC peak/DC)	V _{OFF}	200	V	
	Continuous load current (AC peak/DC)	I _O	200	mA	
	ON current reduction rate	ΔI _O /°C	-2.0	mA/°C	Ta ≥ 25°C
Dielectric strength between I/O (See note 1.)		V _{I-O}	1500	Vrms	AC for 1 min
Ambient operating temperature		T _a	-40 to +85	°C	With no icing or condensation
Ambient storage temperature		T _{STG}	-55 to +125	°C	With no icing or condensation
Soldering temperature		-	260	°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V _F	1.0	1.15	1.3	V I _F = 10 mA
	Reverse current	I _R	-	-	10	µA V _R = 5 V
	Capacity between terminals	C _T	-	30	-	pF V = 0, f = 1 MHz
	Trigger LED forward current	I _{FT}	-	1	3	mA I _O = 200 mA
Output	Maximum resistance with output ON	R _{ON}	-	5	8	Ω I _F = 5 mA, I _O = 200 mA
	Current leakage when the relay is open	I _{LEAK}	-	-	1.0	µA V _{OFF} = 200 V
	Capacity between terminals	C _{OFF}	-	100	-	pF V = 0, f = 1 MHz
	Capacity between I/O terminals	C _{I-O}	-	0.8	-	pF f = 1 MHz, V _s = 0 V
Insulation resistance between I/O terminals		R _{I-O}	1000	-	-	MΩ V _{I-O} = 500 VDC, RoHs ≤ 60 %
Turn-ON time		t _{ON}	-	0.6	1.5	ms I _F = 5 mA, R _L = 200 Ω, V _{DD} = 20 V (See note: 2)
Turn-OFF time		t _{OFF}	-	0.1	1	ms V _{DD} = 20 V (See note: 2)

Note: 2. Turn-ON and Turn-OFF Times




■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V_{DD}	-	150	200	V
Operating LED forward current	I_F	5	7.5	25	mA
Continuous load current (AC peak/DC)	I_o	-	-	130	mA
Ambient operating temperature	T_a	-20	-	65	°C

■ Engineering Data


LED forward current vs. Ambient temperature

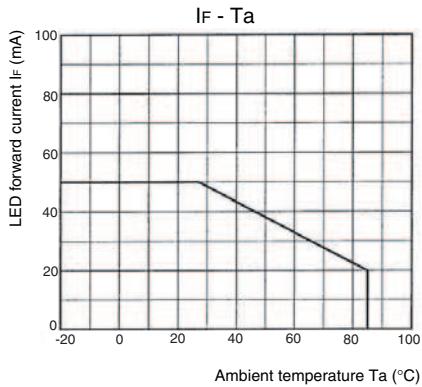


Continuous load current vs. Ambient temperature

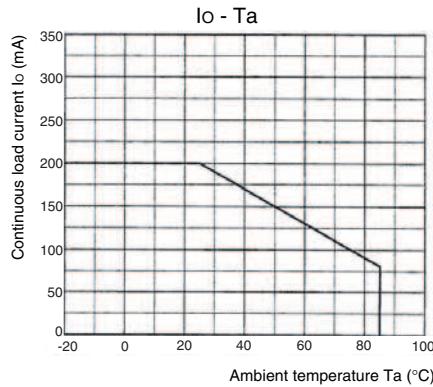


LED forward current vs. LED forward voltage

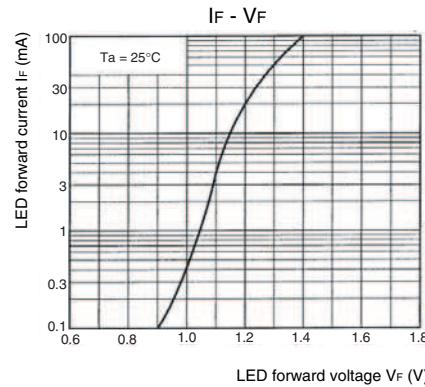


Continuous load current vs. On-state voltage

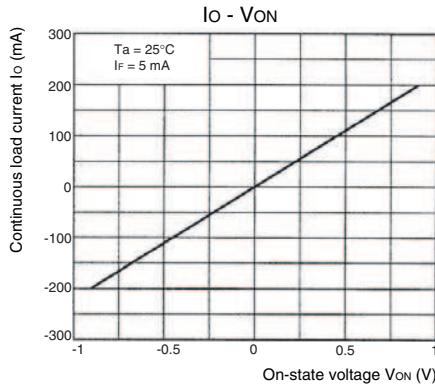


On-state resistance vs. Ambient temperature

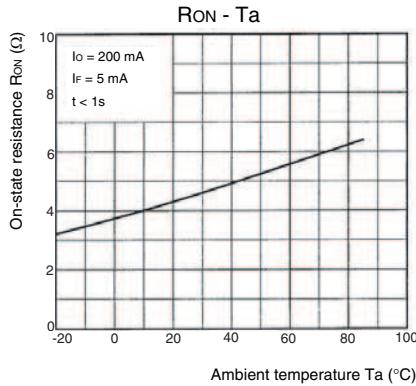


Trigger LED forward current vs. Ambient temperature

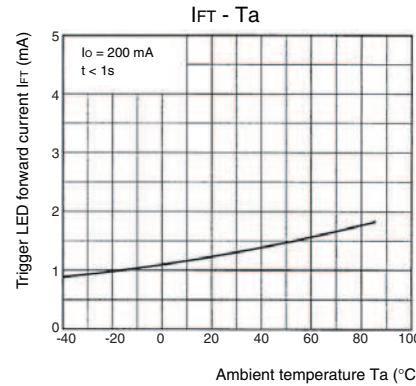


Turn ON, Turn OFF time vs. LED forward current

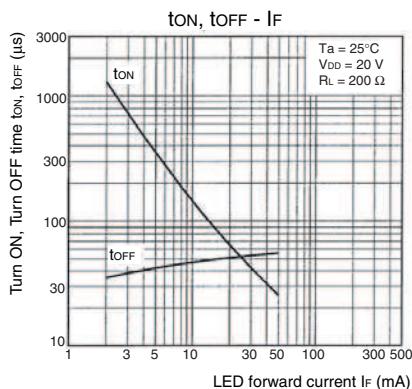

Turn ON, Turn OFF time vs. Ambient temperature

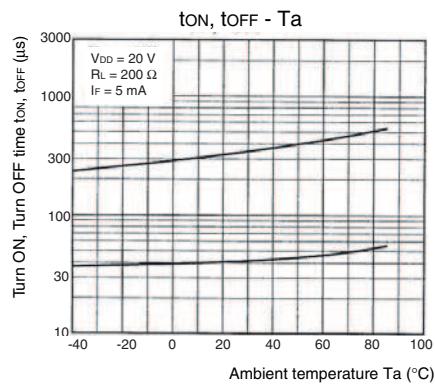

Current leakage vs. Ambient temperature

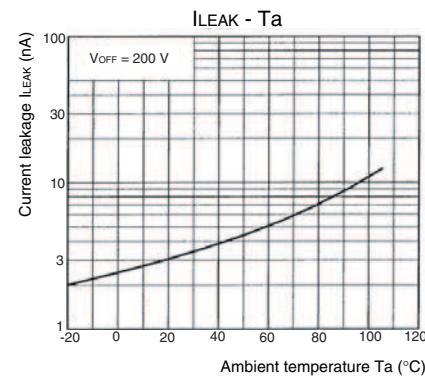

■ Safety Precautions

- Refer to "Common Precautions" for all G3VM models.


Appearance/Dimensions

SOP8 type

■ Appearance

SOP (Small Outline Package)

SOP8

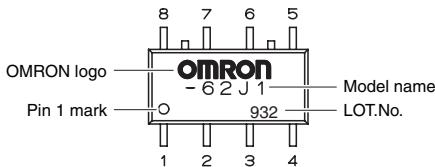

Note: The actual product is marked differently from the image shown here.


■ SOP8

(Unit: mm)




Surface-mounting Terminals

Weight: 0.2 g

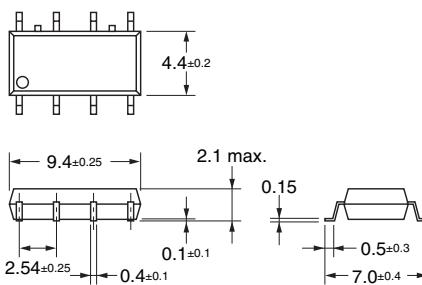

Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: www.omron.com/ecb

Cat. No. K163-E1-01
0412(0412)(O)