

---

## 8V INPUT LOW SUPPLY CURRENT VOLTAGE REGULATOR

---

NO.EA-038-130422

### OUTLINE

The RN5RT Series are CMOS-based voltage regulator ICs with high output voltage accuracy and low supply current developed. Each of these voltage regulator ICs consists of a voltage reference unit, an error amplifier, output voltage setting resistors and a current limit circuit. The output voltage of these ICs is fixed with high accuracy.

The built-in Driver Transistor of low ON Resistance permits developing of low dropout CMOS type regulator as RN5RT Series. Even if  $V_{OUT}$  is shorted to GND, the current limit circuit protects the ICs from destruction. Furthermore, these ICs have a chip enable function, so that the supply current on standby can be minimized.

Since the package for these ICs is the SOT-23-5 (Mini-mold) package, high density mounting of the ICs on boards is possible.


### FEATURES

- Supply Current ..... Typ. 4 $\mu$ A (except  $I_{CEL}$ )
- Standby Current ..... Typ. 0.1 $\mu$ A
- Dropout Voltage ..... Typ. 0.3V ( $I_{OUT}=60\text{mA}$ , RN5RT30A)
- Temperature-Drift Coefficient of Output Voltage ..... Typ.  $\pm 100\text{ppm}/^\circ\text{C}$
- Line Regulation. .... Typ. 0.15%/V
- Input Voltage Range ..... Max. 8.0V
- Output Voltage Range..... 2.0V to 6.0V (0.1V steps)
- Output Voltage Accuracy.....  $\pm 2.0\%$
- Built-in Fold Back Protection Circuit ..... Typ. 30mA (Current at short mode)
- Package ..... SOT-23-5

### APPLICATION

- Power source for battery-powered equipment.
- Power source for cellular phones, cameras, VCRs, camcorders, hand-held audio instruments and hand-held communication equipment.
- Power source for domestic appliances.

## BLOCK DIAGRAM

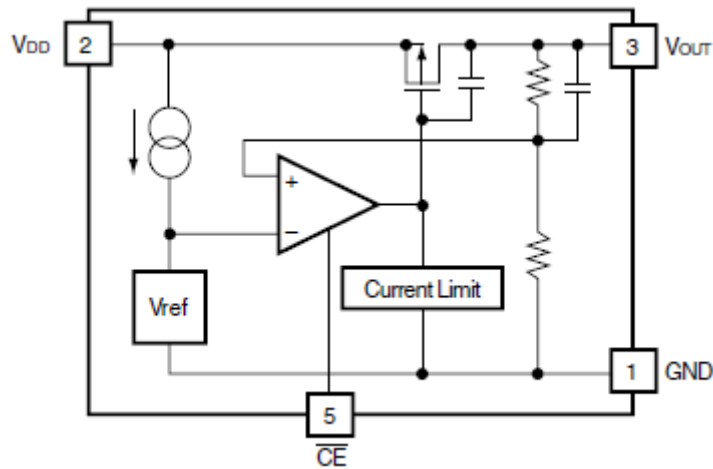


## SELECTION GUIDE

The output voltage for the ICs can be selected at the user's request.

Product Name	Package	Quantity per Reel	Pb Free	Halogen Free
RN5RTxxAA-TR-FE	SOT-23-5	3,000 pcs	Yes	Yes
xx: The output voltage can be designated in the range from 1.2V (12) to 6.0V (60) in 0.1V steps.				

## PIN CONFIGURATION



## PIN DESCRIPTION

● SOT-23-5

Pin No	Symbol	Pin Description
1	GND	Ground Pin
2	V <sub>DD</sub>	Input Pin
3	V <sub>OUT</sub>	Output Pin
4	NC	No Connection
5	$\overline{\text{CE}}$	Chip Enable Pin

## ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Rating	Unit
$V_{IN}$	Input Voltage	9	V
$V_{CE}$	Input Voltage ( $\overline{CE}$ )	-0.3 to $V_{IN}+0.3$	V
$V_{OUT}$	Output Voltage	-0.3 to $V_{IN}+0.3$	V
$I_{OUT}$	Output Current	150	mA
$P_D$	Power Dissipation* (SOT-23-5)	420	mW
$T_{opt}$	Operating Temperature Range	-40 to 85	°C
$T_{stg}$	Storage Temperature Range	-55 to 125	°C
$T_{solder}$	Lead Temperature (Soldering)	260°C , 10s	

\*) For Power Dissipation, please refer to PACKAGE INFORMATION.

### ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field.

The functional operation at or over these absolute maximum ratings is not assured.

### RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

## ELECTRICAL CHARACTERISTICS

## • RN5RT30A

T<sub>opt</sub>=25°C

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V <sub>OUT</sub>	Output Voltage	V <sub>IN</sub> =4.0V, I <sub>OUT</sub> =10mA	2.940	3.000	3.060	V
I <sub>OUT</sub>	Output Current	V <sub>IN</sub> =4.0V	40	60		mA
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation	V <sub>IN</sub> =4.0V 1mA ≤ I <sub>OUT</sub> ≤ 60mA		40	80	mV
V <sub>DIF</sub>	Dropout Voltage	I <sub>OUT</sub> =60mA		0.3	0.5	V
I <sub>SS</sub>	Supply Current	V <sub>IN</sub> =4.0V (except I <sub>CEL</sub> )		4.0	10	μA
I <sub>standby</sub>	Supply Current (Standby)	V <sub>IN</sub> =V <sub>CE</sub> =4.0V		0.1	1.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation	I <sub>OUT</sub> =30mA V <sub>OUT</sub> +0.5V ≤ V <sub>IN</sub> ≤ 8.0V	0.00	0.15	0.30	%/V
V <sub>IN</sub>	Input Voltage				8	V
$\frac{\Delta V_{OUT}}{\Delta T_{opt}}$	Output Voltage Temperature Coefficient	I <sub>OUT</sub> =10mA -40°C ≤ T <sub>opt</sub> ≤ 85°C		±100		ppm/°C
I <sub>lim</sub>	Short Current Limit	V <sub>OUT</sub> =0V		30		mA
V <sub>CEH</sub>	$\overline{CE}$ Input Voltage "H"		1.5			V
V <sub>CEL</sub>	$\overline{CE}$ Input Voltage "L"				0.25	V
I <sub>CEH</sub>	$\overline{CE}$ Input Current "H"	V <sub>CE</sub> =V <sub>IN</sub>		0.0	0.1	μA
I <sub>CEL</sub>	$\overline{CE}$ Input Current "L"	V <sub>CE</sub> =0V	-4.0	-2.0	-0.1	μA

## • RN5RT40A

Topt=25°C

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V <sub>OUT</sub>	Output Voltage	V <sub>IN</sub> =5.0V, I <sub>OUT</sub> =10mA	3.920	4.000	4.080	V
I <sub>OUT</sub>	Output Current	V <sub>IN</sub> =5.0V	50	80		mA
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation	V <sub>IN</sub> =5.0V 1mA≤I <sub>OUT</sub> ≤80mA		40	80	mV
V <sub>DIF</sub>	Dropout Voltage	I <sub>OUT</sub> =80mA		0.3	0.5	V
I <sub>SS</sub>	Supply Current	V <sub>IN</sub> =5.0V (except I <sub>CEL</sub> )		4	10	μA
I <sub>standby</sub>	Supply Current (Standby)	V <sub>IN</sub> =V <sub>CE</sub> =5.0V		0.1	1.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation	I <sub>OUT</sub> =30mA V <sub>OUT</sub> +0.5V≤V <sub>IN</sub> ≤8.0V		0.15	0.30	%/V
V <sub>IN</sub>	Input Voltage				8	V
$\frac{\Delta V_{OUT}}{\Delta T_{opt}}$	Output Voltage Temperature Coefficient	I <sub>OUT</sub> =10mA -40°C≤T <sub>opt</sub> ≤85°C		±100		ppm/°C
I <sub>lim</sub>	Short Current Limit	V <sub>OUT</sub> =0V		30		mA
V <sub>CEH</sub>	$\overline{CE}$ Input Voltage “H”		1.5			V
V <sub>CEL</sub>	$\overline{CE}$ Input Voltage “L”				0.25	V
I <sub>CEH</sub>	$\overline{CE}$ Input Current “H”	V <sub>CE</sub> =V <sub>IN</sub>		0.0	0.1	μA
I <sub>CEL</sub>	$\overline{CE}$ Input Current “L”	V <sub>CE</sub> =0V	-4.0	-2.0	-0.1	μA

## • RN5RT50A

Topt=25°C

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V <sub>OUT</sub>	Output Voltage	V <sub>IN</sub> =6.0V, I <sub>OUT</sub> =10mA	4.900	5.000	5.100	V
I <sub>OUT</sub>	Output Current	V <sub>IN</sub> =6.0V	65	100		mA
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation	V <sub>IN</sub> =6.0V 1mA≤I <sub>OUT</sub> ≤100mA		40	80	mV
V <sub>DIF</sub>	Dropout Voltage	I <sub>OUT</sub> =100mA		0.3	0.5	V
I <sub>SS</sub>	Supply Current	V <sub>IN</sub> =6.0V (except I <sub>CEL</sub> )		4	10	μA
I <sub>standby</sub>	Supply Current (Standby)	V <sub>IN</sub> =V <sub>CE</sub> =6.0V		0.1	1.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation	I <sub>OUT</sub> =30mA V <sub>OUT</sub> +0.5V≤V <sub>IN</sub> ≤8.0V		0.15	0.30	%/V
V <sub>IN</sub>	Input Voltage				8	V
$\frac{\Delta V_{OUT}}{\Delta T_{opt}}$	Output Voltage Temperature Coefficient	I <sub>OUT</sub> =10mA -40°C≤T <sub>opt</sub> ≤85°C		±100		ppm/°C
I <sub>lim</sub>	Short Current Limit	V <sub>OUT</sub> =0V		30		mA
V <sub>CEH</sub>	$\overline{CE}$ Input Voltage “H”		1.5			V
V <sub>CEL</sub>	$\overline{CE}$ Input Voltage “L”				0.25	V
I <sub>CEH</sub>	$\overline{CE}$ Input Current “H”	V <sub>CE</sub> =V <sub>IN</sub>		0.0	0.1	μA
I <sub>CEL</sub>	$\overline{CE}$ Input Current “L”	V <sub>CE</sub> =0V	-4.0	-2.0	-0.1	μA


## ELECTRICAL CHARACTERISTICS BY OUTPUT VOLTAGE

Part Number	Output Voltage				Output Current			Load Regulation			Dropout Voltage			Supply Current		
	V <sub>OUT</sub> (V)				I <sub>OUT</sub> (mA)			ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> (mA)			V <sub>DIF</sub> (V)			I <sub>SS</sub> (μA)		
	Conditions	Min.	Typ.	Max.	Conditions	Min.	Typ.	Conditions	Typ.	Max.	Conditions	Typ.	Max.	Conditions	Typ.	Max.
RN5RT20A	V <sub>IN</sub> -V <sub>OUT</sub> =1.0V  I <sub>OUT</sub> =10mA	1.960	2.000	2.040	V <sub>IN</sub> -V <sub>OUT</sub> =1.0V	25	40	V <sub>IN</sub> -V <sub>OUT</sub> =1.0V  1mA ≤ I <sub>OUT</sub> ≤ 40mA	40	80	0.3	0.5	V <sub>IN</sub> -V <sub>OUT</sub> =1.0V (except I <sub>CEL</sub> )	4.0	10	
RN5RT21A																
RN5RT22A																
RN5RT23A																
RN5RT24A																
RN5RT25A																
RN5RT26A																
RN5RT27A																
RN5RT28A																
RN5RT29A																
RN5RT30A																
RN5RT31A																
RN5RT32A																
RN5RT33A																
RN5RT34A																
RN5RT35A																
RN5RT36A																
RN5RT37A																
RN5RT38A																
RN5RT39A																
RN5RT40A																
RN5RT41A																
RN5RT42A																
RN5RT43A																
RN5RT44A																
RN5RT45A																
RN5RT46A																
RN5RT47A																
RN5RT48A																
RN5RT49A																
RN5RT50A																
RN5RT51A																
RN5RT52A																
RN5RT53A																
RN5RT54A																
RN5RT55A																
RN5RT56A																
RN5RT57A																
RN5RT58A																
RN5RT59A																
RN5RT60A																

T<sub>opt</sub>=25°C

Supply Current (Standby)			Line Regulation			Input Voltage	Output Voltage Temperature Coefficient		Short Current Limit		CE Input Voltage		CE Input Current						
											"H"	"L"	"H"			"L"			
Istandby (μA)			ΔV <sub>OUT</sub> /ΔV <sub>IN</sub> (%/V)			V <sub>IN</sub> (V)	ΔV <sub>OUT</sub> /ΔT (ppm/°C)		I <sub>lim</sub> (mA)		V <sub>CEH</sub> (V)	V <sub>CEL</sub> (V)	I <sub>CEH</sub> (μA)			I <sub>CEL</sub> (μA)			
Conditions	Typ.	Max.	Conditions	Typ.	Max.	Max.	Conditions	Typ.	Conditions	Typ.	Min.	Max.	Conditions	Typ.	Max.	Conditions	Min.	Typ.	Max.
V <sub>IN</sub> -V <sub>OUT</sub> =1.0V	0.1	1.0	I <sub>OUT</sub> =30mA V <sub>OUT</sub> +0.5V ≤V <sub>IN</sub> ≤8V	0.15	0.3	8	I <sub>OUT</sub> =10mA -40°C ≤T <sub>opt</sub> ≤85°C	±100	V <sub>OUT</sub> =0V	30	1.5	0.25	V <sub>CE</sub> =V <sub>IN</sub>	0	0.1	V <sub>CE</sub> =0V	-4.0	-2.0	-0.1

## OPERATION

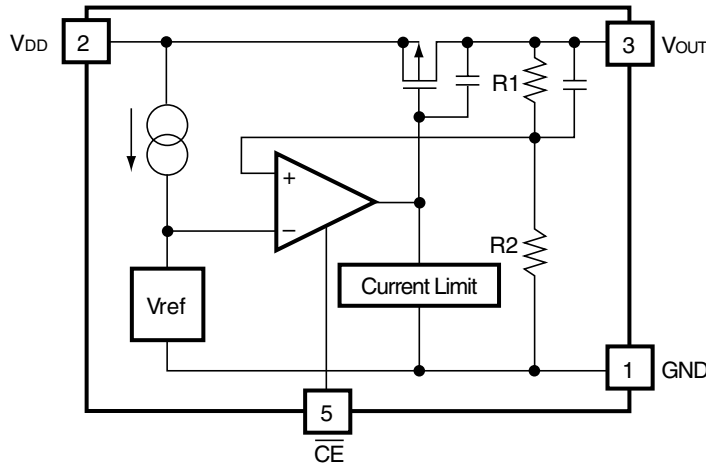

In these ICs, the output voltage  $V_{OUT}$  is detected by feed-back registers R1, R2, and the detected output voltage is compared with a reference voltage by the error amplifier, so that a constant voltage is output.

A current limit circuit working for short protection and a chip enable circuit for standby function are included.

## TEST CIRCUITS

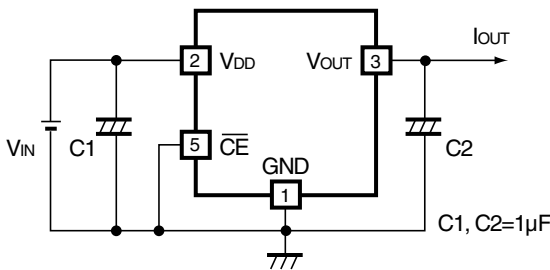


Fig.1 Standard Test Circuit

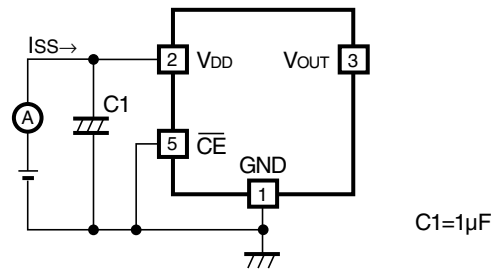


Fig.2 Supply Current Test Circuit




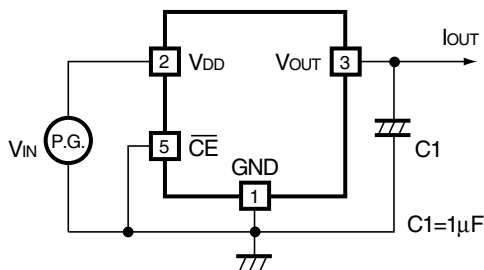




Fig.3 Line Transient Response Test Circuit





# TYPICAL CHARACTERISTICS

## 1) Output Voltage vs. Output Current

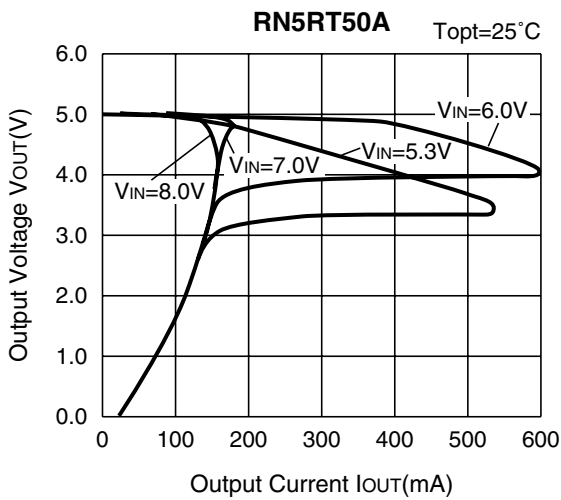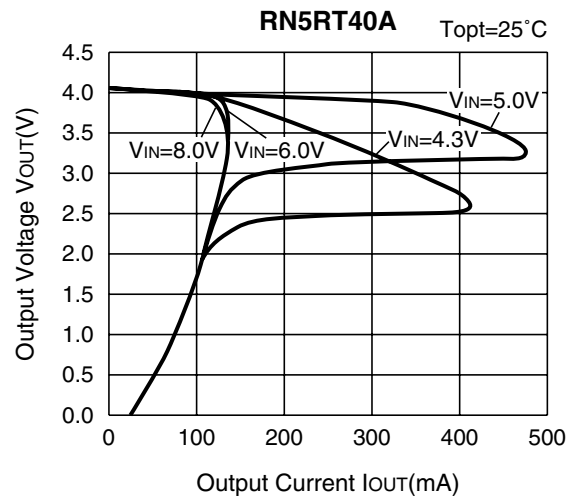
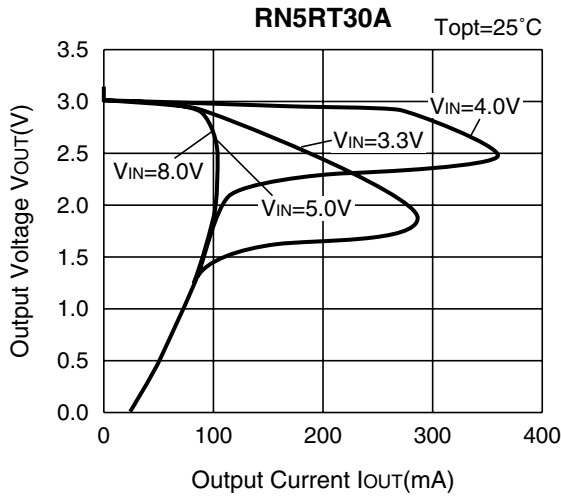



## 2) Output Voltage vs. Input Voltage

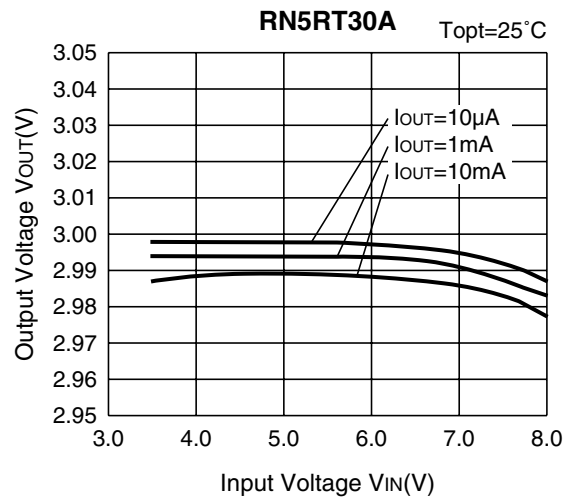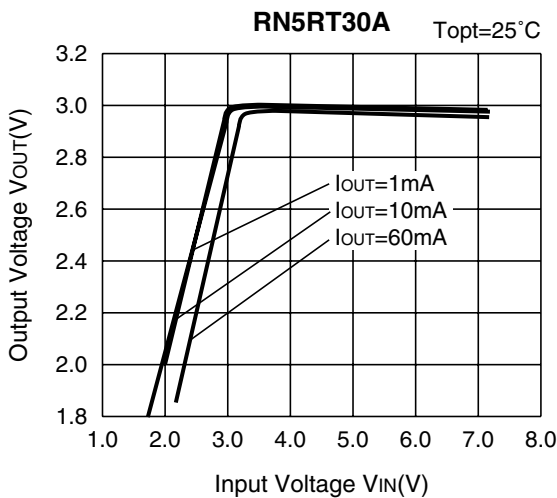

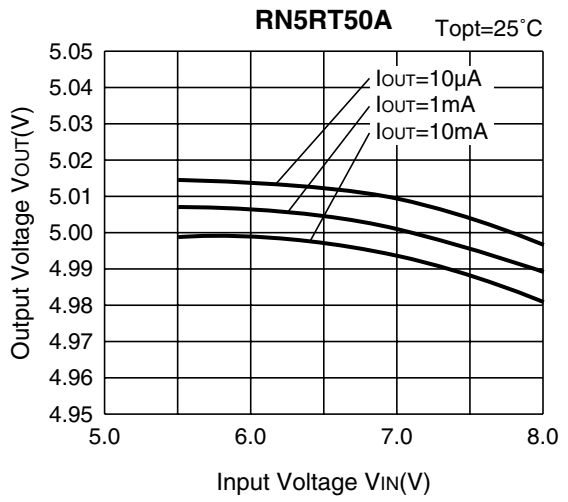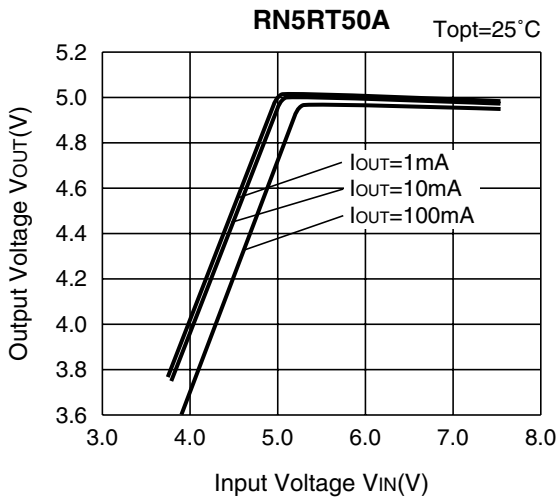
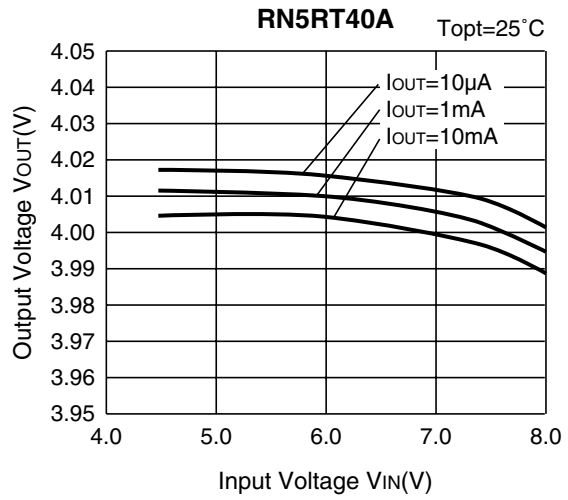
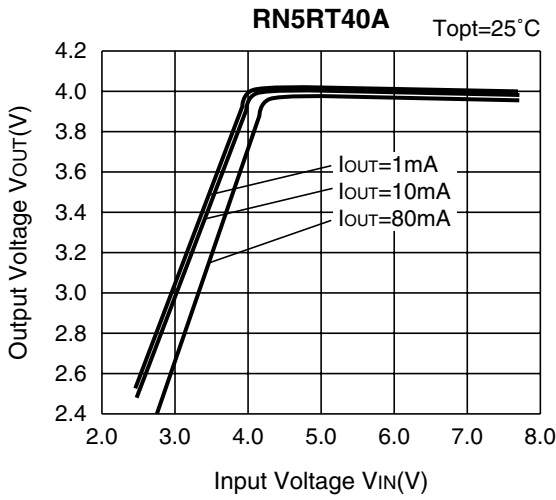


**3) Dropout Voltage vs. Output Current**


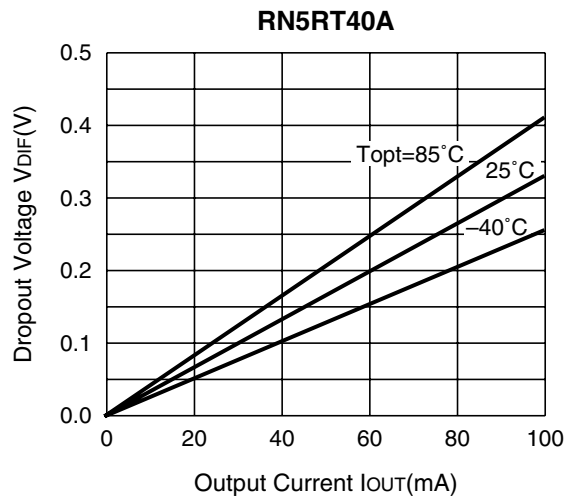
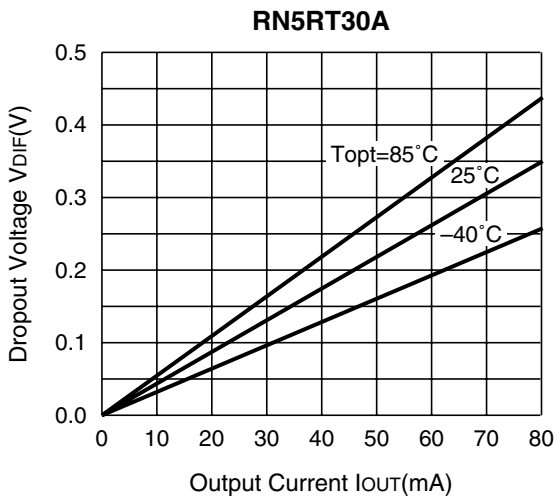


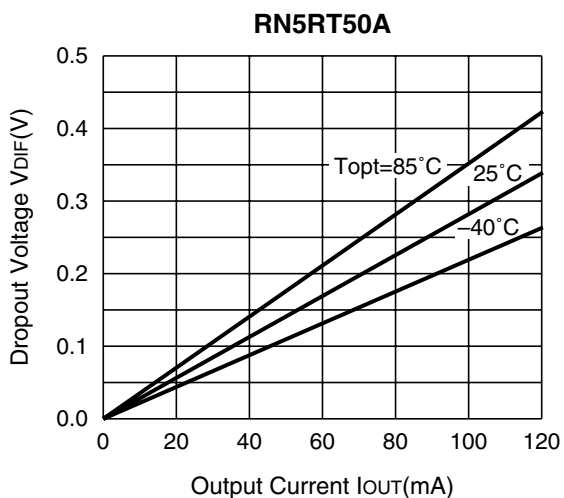



4) Output Voltage vs. Temperature

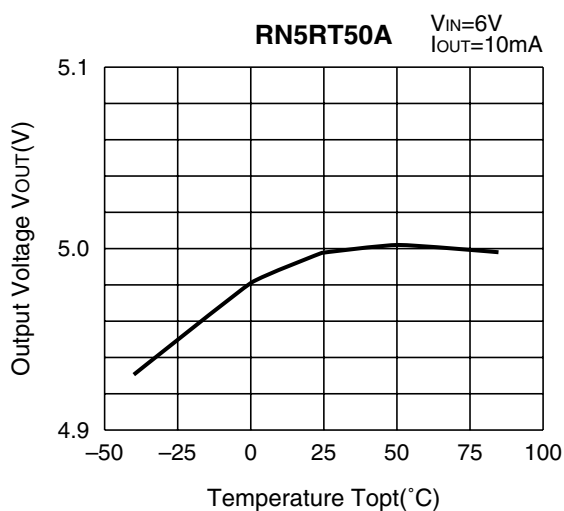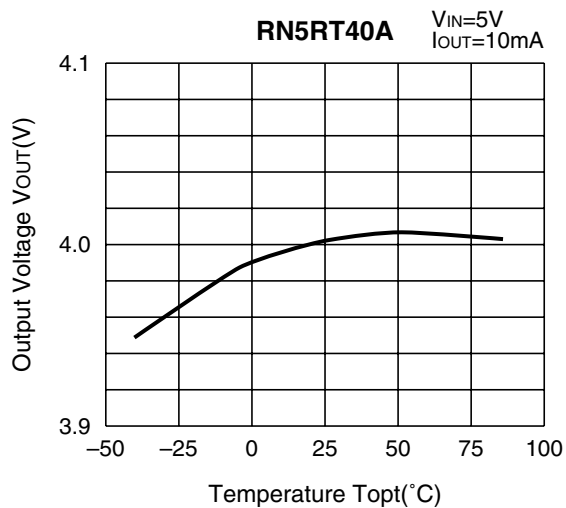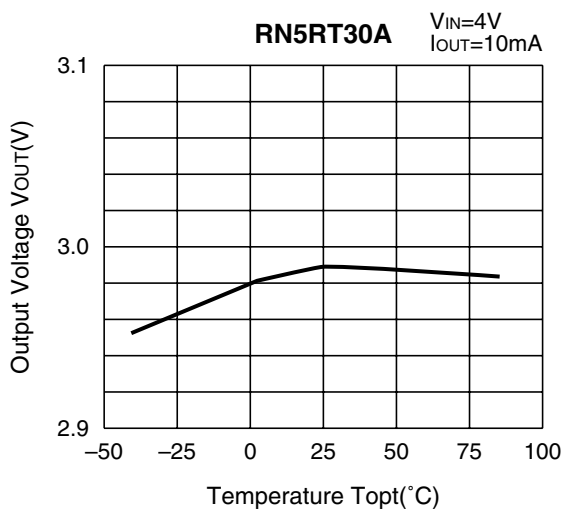


**5) Supply Current vs. Input Voltage**

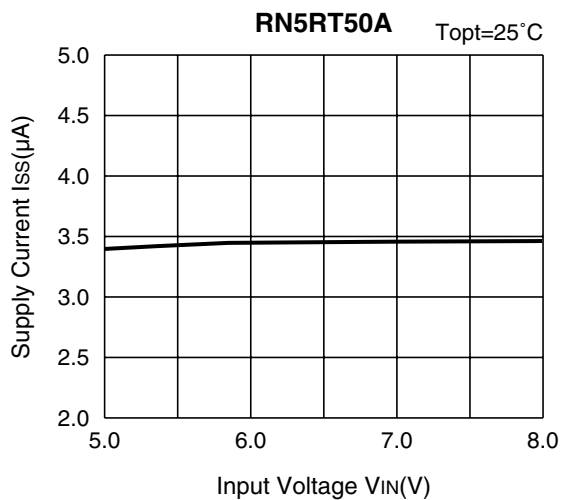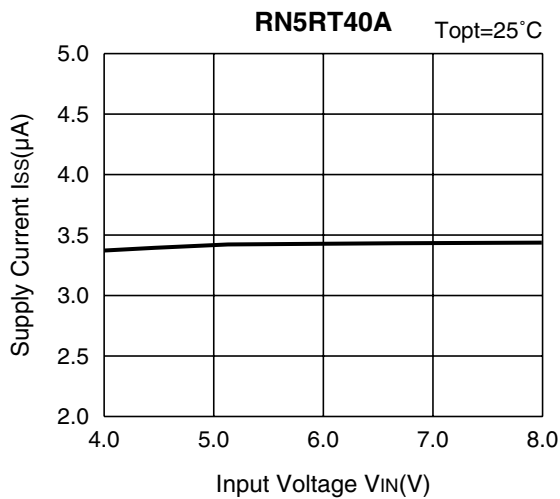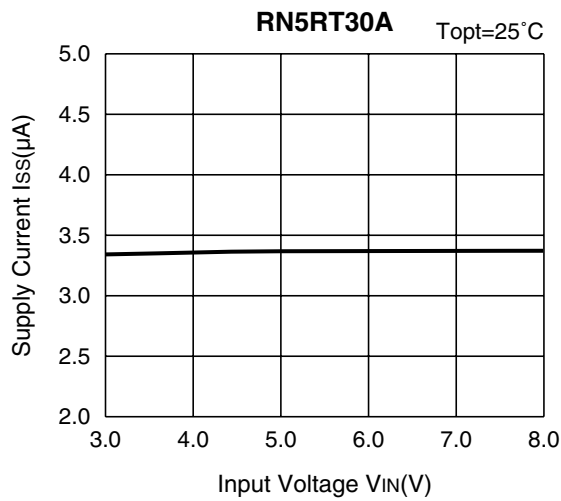


**6) Supply Current vs. Temperature**

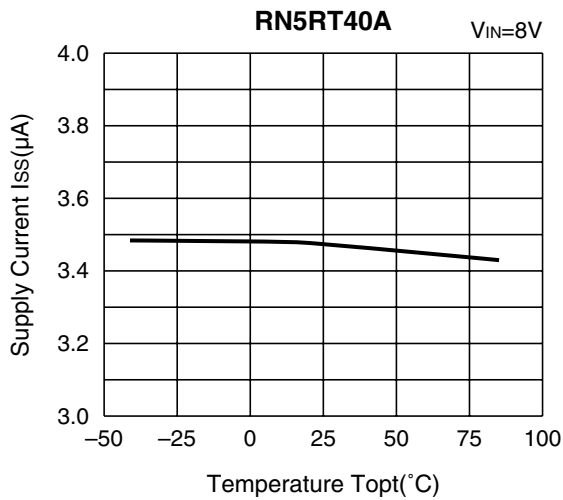
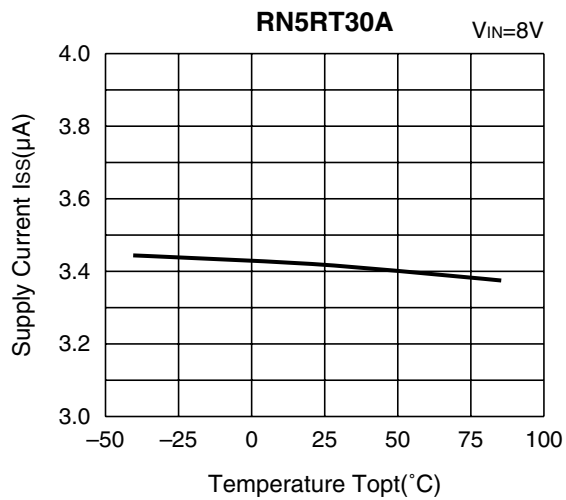


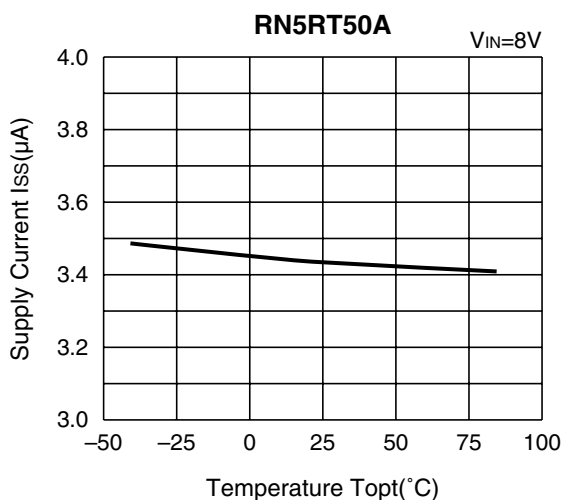


**7) Dropout Voltage vs. Set Output Voltage**

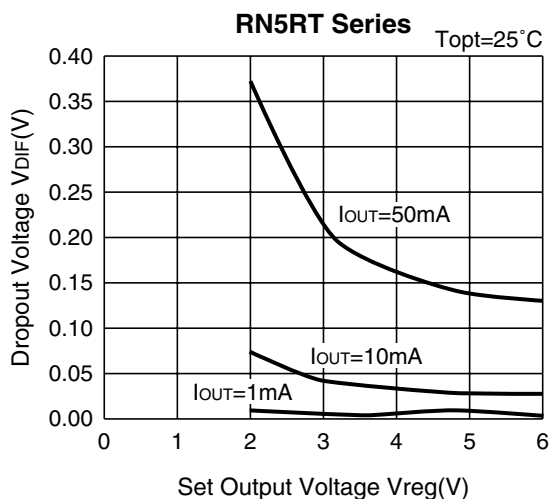

**8) Line Transient Response**

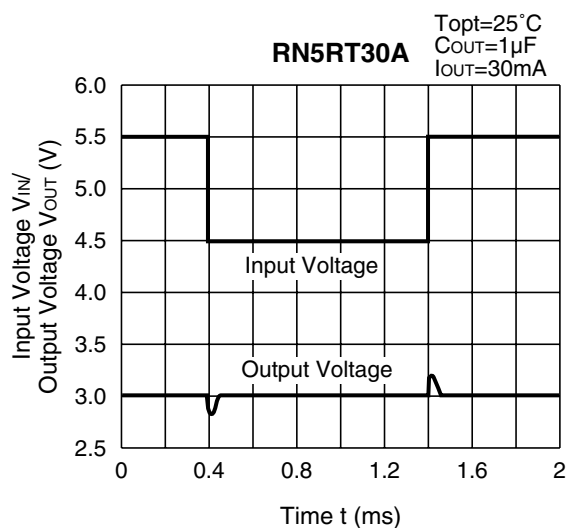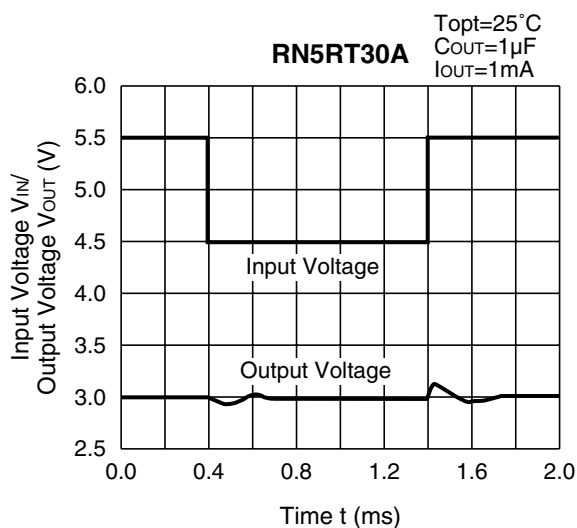

## TYPICAL APPLICATION

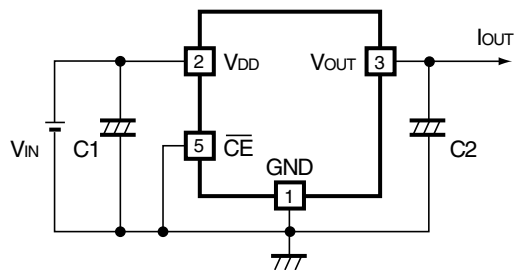

In the RN5RT Series, a constant voltage can be obtained without using capacitor C1 and C2. However, when the wire connected to  $V_{IN}$  is long, use a capacitor C1. Transient noise of output voltage occurred due to load deviation can be reduced by using a capacitor C2.

Insert capacitors C1 and C2 with the capacitance of  $0.1\mu\text{F}$  to  $2.0\mu\text{F}$  between input/output pins and GND pin with minimum wiring.



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, firecontainment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.



**For the conservation of the global environment, Ricoh is advancing the decrease of the negative environmental impact material.**  
After Apr. 1, 2006, we will ship out the lead free products only. Thus, all products that will be shipped from now on comply with RoHS Directive. Basically after Apr. 1, 2012, we will ship out the Power Management ICs of the Halogen Free products only. (Ricoh Halogen Free products are also Antimony Free.)

## **RICOH** RICOH COMPANY, LTD. Electronic Devices Company

<http://www.ricoh.com/LSI/>

### **RICOH COMPANY, LTD.**

#### **Electronic Devices Company**

#### ● Higashi-Shinagawa Office (International Sales)

3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan  
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

### **RICOH EUROPE (NETHERLANDS) B.V.**

#### ● Semiconductor Support Centre

"Nieuw Kronenburg" Prof. W.H. Keesomlaan 1, 1183 DJ, Amstelveen, The Netherlands  
P.O.Box 114, 1180 AC Amstelveen  
Phone: +31-20-5474-309 Fax: +31-20-5474-791

### **RICOH ELECTRONIC DEVICES KOREA Co., Ltd.**

11 floor, Haesung 1 building, 942, Daechidong, Gangnamgu, Seoul, Korea  
Phone: +82-2-2135-5700 Fax: +82-2-2135-5705

### **RICOH ELECTRONIC DEVICES SHANGHAI Co., Ltd.**

Room403, No.2 Building, 690#Bi Bo Road, Pu Dong New district, Shanghai 201203,  
People's Republic of China  
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

### **RICOH COMPANY, LTD.**

#### **Electronic Devices Company**

#### ● Taipei office

Room109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)  
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623