



Micro Commercial Components



Micro Commercial Components  
 20736 Marilla Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

2N3501

**NPN  
 BIPOLAR  
 TRANSISTOR**

**150 Volts  
 500mAmps  
 TO-39 Package**

**Features**


- Meets MIL-S-19500/366
- Collector-Base Voltage 150V
- Collector Current: 500 mA
- Fast Switching 1265 nS
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)

**Maximum Ratings**

RATING	SYMBOL	MAX.	UNIT
Collector-Emitter Voltage	V <sub>CEO</sub>	150	Vdc
Collector-Base Voltage	V <sub>CBO</sub>	150	Vdc
Emitter-Base Voltage	V <sub>EBO</sub>	6.0	Vdc
Collector Current—Continuous	I <sub>C</sub>	300	mAdc
Total Device Dissipation @ T <sub>A</sub> = 25°C Derate above 25°C	P <sub>D</sub>	1.0 5.71	Watt mW/°C
Total Device Dissipation @ T <sub>C</sub> = 25°C Derate above 25°C	P <sub>D</sub>	5.0 28.6	Watts mW/°C
Operating Temperature Range	T <sub>J</sub>	-55 to +200	°C
Storage Temperature Range	T <sub>S</sub>	-55 to +200	°C
Thermal Resistance, Junction to Ambient	R <sub>θJA</sub>	175	°C/W
Thermal Resistance, Junction to Case	R <sub>θJC</sub>	35	°C/W

Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.

**Mechanical Outline**

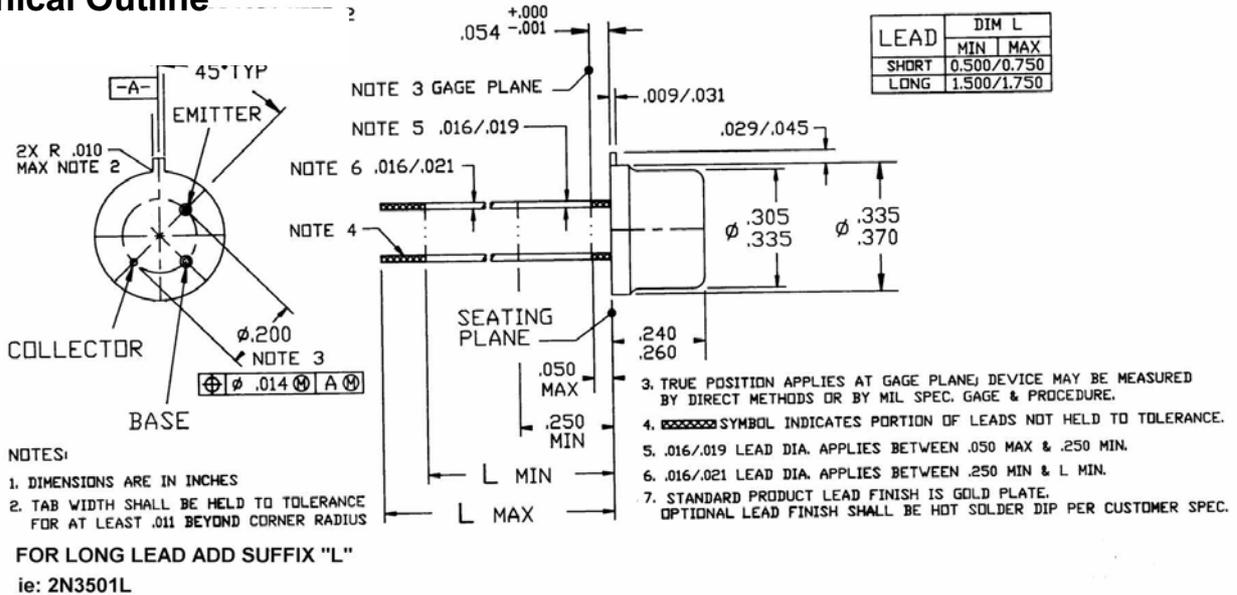

[www.mccsemi.com](http://www.mccsemi.com)

# 2N3501

## Electrical Parameters (T<sub>A</sub> @ 25°C unless otherwise specified)

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNIT
<b>Off Characteristics</b>					
Collector-Emitter Breakdown Voltage(1) (I <sub>C</sub> = 10 mAdc, I <sub>B</sub> = 0)	<b>BV<sub>CEO</sub></b>	150	--	--	Vdc
Collector-Base Breakdown Voltage (I <sub>C</sub> = 10 μAdc, I <sub>E</sub> = 0)	<b>BV<sub>CBO</sub></b>	150	--	--	Vdc
Emitter-Base Breakdown Voltage (I <sub>E</sub> = 10 μAdc, I <sub>C</sub> = 0)	<b>BV<sub>EBO</sub></b>	6.0	--	--	Vdc
Collector Cutoff Current (V <sub>CB</sub> = 75 Vdc, I <sub>E</sub> = 0) (V <sub>CB</sub> = 75 Vdc, I <sub>E</sub> = 0, T <sub>A</sub> = 150°C)	<b>I<sub>CBO</sub></b>	--	--	0.05 50	μAdc
Emitter Cutoff Current (V <sub>EB(off)</sub> = 4.0 Vdc, I <sub>C</sub> = 0)	<b>I<sub>EBO</sub></b>	--	--	25	nAdc
D.C. Current Gain (I <sub>C</sub> = 0.1 mAdc, V <sub>CE</sub> = 10 Vdc) (I <sub>C</sub> = 1.0 mAdc, V <sub>CE</sub> = 10 Vdc) (I <sub>C</sub> = 10 mAdc, V <sub>CE</sub> = 10 Vdc)(1) (I <sub>C</sub> = 150 mAdc, V <sub>CE</sub> = 10 Vdc)(1) (I <sub>C</sub> = 150 mAdc, V <sub>CE</sub> = 10Vdc) @ 55°C (I <sub>C</sub> = 300 mAdc, V <sub>CE</sub> = 10 Vdc)(1)	<b>h<sub>FE</sub></b>	35 50 75 100 45 20	-- -- -- -- -- --	-- -- -- 300 -- --	--
Collector-Emitter Saturation Voltage(1) (I <sub>C</sub> = 10 mAdc, I <sub>B</sub> = 1.0 mAdc) (I <sub>C</sub> = 150 mAdc, I <sub>B</sub> = 15 mAdc)	<b>V<sub>CE(Sat)</sub></b>	-- --	-- --	0.2 0.4	Vdc
Base-Emitter Saturation Voltage(1) (I <sub>C</sub> = 10 mAdc, I <sub>B</sub> = 1.0 mAdc) (I <sub>C</sub> = 150 mAdc, I <sub>B</sub> = 15 mAdc)	<b>V<sub>BE(Sat)</sub></b>	-- --	-- --	0.8 1.2	Vdc
Magnitude of common emitter small-signal short-circuit forward current transfer ratio (V <sub>CE</sub> = 20 Vdc, I <sub>C</sub> = 20 mAdc, f = 100 MHz)	<b> h<sub>fe</sub> </b>	1.5	--	8 --	
Output Capacitance (V <sub>CB</sub> = 10 Vdc, I <sub>E</sub> = 0, 100kHz ≤ f ≤ 1MHz)	<b>C<sub>OBO</sub></b>	--	--	8.0	pf
Input Capacitance (V <sub>EB</sub> = 0.5 Vdc, I <sub>C</sub> = 0, 100kHz ≤ f ≤ 100MHz)	<b>C<sub>IBO</sub></b>	--	--	80	pf
Small -signal Current Gain (I <sub>C</sub> = 10mAdc, V <sub>CE</sub> = 10Vdc, f = 1.0 kHz)	<b>h<sub>fe</sub></b>	75	--	300	
Noise figure (V <sub>CE</sub> = 10Vdc, I <sub>C</sub> = 0.5mAdc; R <sub>g</sub> = 1kohms, f = 1MHz)	<b>NF</b>			16	dB
Noise figure (V <sub>CE</sub> = 10Vdc, I <sub>C</sub> = 0.5mAdc; R <sub>g</sub> = 1kohms, f = 1MHz)	<b>NF</b>			6	dB
Turn - on time (V <sub>EB</sub> = 12Vdc, I <sub>C</sub> = 150mAdc, I <sub>B1</sub> = 15mAdc)	<b>t<sub>on</sub></b>			115	nS
Turn - off time (I <sub>C</sub> = 150mAdc, I <sub>B1</sub> = I <sub>B2</sub> = -15mAdc)	<b>t<sub>off</sub></b>			1150	nS

(1) Pulse Test: Pulse Width ≤ 300 ms, Duty Cycle ≤ 2.0%



Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-BP	Bulk; 50 pcs/Box

**\*\*\*IMPORTANT NOTICE\*\*\***

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*LIFE SUPPORT\*\*\***

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

**\*\*\*CUSTOMER AWARENESS\*\*\***

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.