


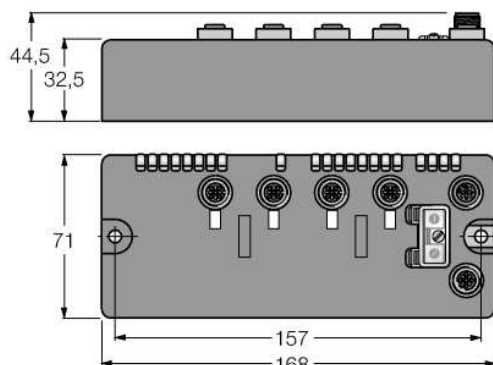

- Compact fieldbus I/O module in IP69K
- DeviceNet™ slave
- 125 / 250 / 500 kbps
- Two 5-pole M12 connectors for fieldbus connection
- 2 rotary switches for node address
- IP69K
- M12 I/O connectors
- LEDs indicating status and diagnostics
- Electronics galvanically separated from the field level via optocouplers
- Simple RFID interface
- Connection of 4 BL ident® read/write heads
- Max cable length of 50 m


Type code	BLCDN-4M12L-2RFID-S-2RFID-S
Ident no.	6811055

Nominal system voltage	24 VDC
System power supply	via DeviceNet
Admissible range V+	18...30VDC
Nominal current V+	80 mA
Max. current V+	4 A

Fieldbus transmission rate	125 / 250 / 500 kbps
Adjustment transmission rate	auto detection
Fieldbus addressing range	0...63
	64...80 (Programmable MACID)
	81...99 (Vendor Specific)
Fieldbus addressing	2 decimally coded rotary switches
Fieldbus connection technology	2 x M12
	5-pole
Fieldbus termination	external
Service interface	RS232 interface
Vendor ID	30
Product type	12
Product code	11055



Technology	
Signal type	Simple RFID Interface
Number of channels	4
Sensor supply	0.5 A per channel, short-circuit proof
Simultaneity factor	1
Transmission rate	115.2 kbps
Cable length	50 m
Electrical isolation	isolation of electronics and field level via optocouplers

Dimensions	1680x 710x 325 mm
Operating temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Relative humidity	15 to 95% (non-condensing)
Vibration test	according to IEC 61131-2
Extended vibration resistance	
- up to 20 g (at 10 to 150 Hz)	For mounting on base plate or machinery
Shock test	according to IEC 61131-2
Electro-magnetic compatibility	according to IEC 61131-2
Protection class	IP69K
Housing material	Glass-filled nylon, nickel plated brass connectors
Housing color	Black
Window material	Lexan
Screw material	Nickel plated brass
Label material	Polyester with Polycarbonate overlay
Ground tab material	Nickel plated brass
Weight	470 ± 20 g
Approvals and certificates	CE, cULus

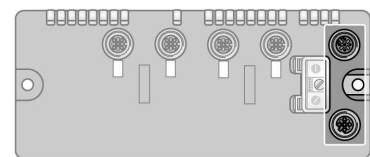


Fieldbus cable (example): RSC RKC 572-2M ident-no. U0323 or
RSC-RKC572-2M ident-no. 6603629

Pin assignment

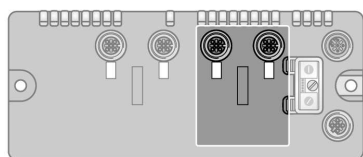



Extension cable (example): RK 4.5T-2-RS 4.5T/S2501 ident-no.
U3-01243 or RK4.5T-2-RS4.5T/S2500 ident-no. 6699200

Connectors .../S2500



Connectors .../S2501

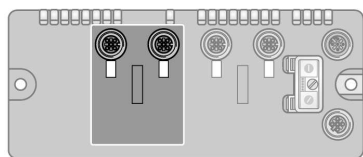

Reference Slot 1

Status: Station LED

LED	Color	Status	Description
IOs		OFF	No power supply
	RED	ON	Insufficient power supply
	RED	FLASHING (1Hz)	Deviating station configuration
	RED	FLASHING (4 Hz)	No module bus communication
	GREEN	ON	Station OK
	GREEN	FLASHING	Force mode active
MNS		OFF	No connection
	GREEN	ON	Fieldbus communication active
	GREEN	FLASHING (1Hz)	Fieldbus communication disabled, device status OK
	RED	ON	Double MAC-ID
	RED	FLASHING	Fieldbus communication timeout
IO	GREEN	ON	I/O slots OK
	GREEN	FLASHING (1Hz)	At least one I/O slot in idle state
	RED	ON	At least one faulty I/O slot
	RED	FLASHING	At least one I/O slot in faulty state

Status: I/O LED, slot 1

LED	Color	Status	Description
D1 *		OFF	Diagnostic disabled
	RED	ON	Station / module bus communication failure
	RED	FLASHING (0.5Hz)	Group diagnostic
RW0 / RW1		OFF	No tag, diagnostic disabled
	GREEN	ON	Tag available
	GREEN	FLASHING (2 Hz)	Data exchange with tag enabled
	RED	ON	Read/write head fault
	RED	FLASHING (2 Hz)	Short-circuit in the supply line of read/write head

* D1 LED also indicates gateway diagnostic

I/O LED Status Slot 2

LED	Colour	Status	Description
D2 *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Any diagnostics active

* D2 LED also reports gateway diagnostics

I/O & Diagnostic Data Map

INPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
RFID 1 ₀	0	Done	Busy	Error	Trans. Conn.	Trans. On	TP	TFR	-
	1	Error Cat. (Category Code)							
	2	Error Desc. (Description Code)							
	3	-	-	-	-	-	-	-	-
	4...11	Read Data (8 Byte)							
RFID 1 ₁	12	Done	Busy	Error	Trans. Conn.	Trans. On	TP	TFR	-
	13	Error Cat. (Category Code)							
	14	Error Desc. (Description Code)							
	15	-	-	-	-	-	-	-	-
	16...23	Read Data (8 Byte)							
RFID 2 ₀	24	Done	Busy	Error	Trans. Conn.	Trans. On	TP	TFR	-
	25	Error Cat. (Category Code)							
	26	Error Desc. (Description Code)							
	27	-	-	-	-	-	-	-	-
	28...35	Read Data (8 Byte)							
RFID 2 ₁	36	Done	Busy	Error	Trans. Conn.	Trans. On	TP	TFR	-
	37	Error Cat. (Category Code)							
	38	Error Desc. (Description Code)							
	39	-	-	-	-	-	-	-	-
	40...47	Read Data (8 Byte)							
Diagnostics	48	Module number reporting diagnostic data							
	49	Replace Station	-	Diagnostics Active	-	-	-	-	-
Slot X (ref. Byte 48)	50	-	-	-	-	-	RFID X ₀ Trans. PS Off	-	-
	51	-	-	-	-	RFID X ₀ Trans. PS Error	-	-	RFID X ₀ Trans. Hardware Error
	52	-	-	-	-	-	RFID X ₁ Trans. PS Off	-	-
	53	-	-	-	-	RFID X ₁ Trans. PS Error	-	-	RFID X ₁ Trans. Hardware Error
OUTPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
RFID 1 ₀	0	Transceiver	Next	Tag ID	Read	Write	Tag Info.	Trans. Info.	Reset
	1	-	-	-	-	-	Byte Count 2	Byte Count 1	Byte Count 0
	2	Address High Byte (MSB)							
	3	Address Low Byte (LSB)							
	4...11	Write Data (8 Byte)							
RFID 1 ₁	12	Transceiver	Next	Tag ID	Read	Write	Tag Info.	Trans. Info.	Reset
	13	-	-	-	-	-	Byte Count 2	Byte Count 1	Byte Count 0
	14	Address High Byte (MSB)							
	15	Address Low Byte (LSB)							
	16...23	Write Data (8 Byte)							
RFID 2 ₀	24	Transceiver	Next	Tag ID	Read	Write	Tag Info.	Trans. Info.	Reset
	25	-	-	-	-	-	Byte Count 2	Byte Count 1	Byte Count 0
	26	Address High Byte (MSB)							
	27	Address Low Byte (LSB)							
	28...35	Write Data (8 Byte)							
RFID 2 ₁	36	Transceiver	Next	Tag ID	Read	Write	Tag Info.	Trans. Info.	Reset
	37	-	-	-	-	-	Byte Count 2	Byte Count 1	Byte Count 0
	38	Address High Byte (MSB)							
	39	Address Low Byte (LSB)							
	40...47	Write Data (8 Byte)							

* The scheduled diagnostic information changes every 125 ms between Slot 1 and Slot 2, if both slots send active diagnostics.