



**piconet® stand-alone module for PROFIBUS-DP**  
**4 digital pnp inputs filter 3 ms**  
**4 digital outputs 2 A**  
**SDPB-0404D-1007**

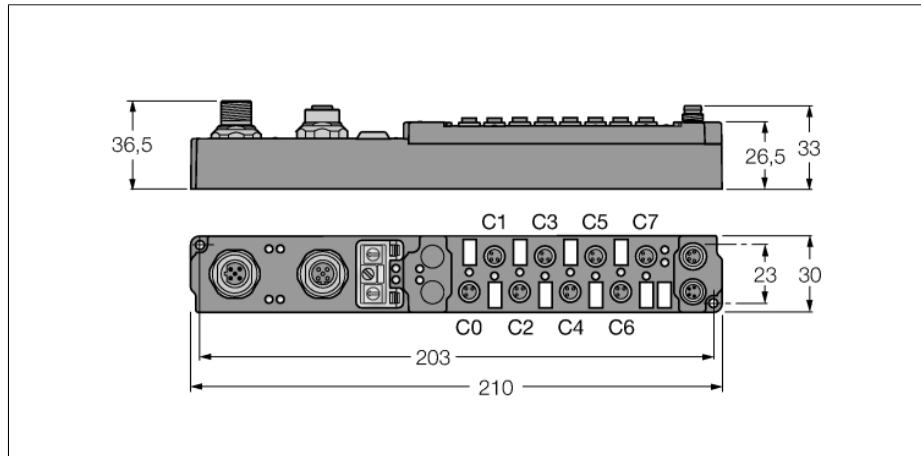


- Configuration interface
- Parametrizable functions
- Supported via I/O-ASSISTANT 2
- Direct connection to the fieldbus
- Fibre-glass reinforced housing
- Shock and vibration tested
- Encapsulated module electronics
- Metal connector
- Degree of protection IP67


**Fieldbus M12 x 1**

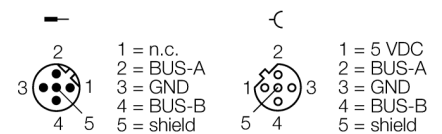


**input M8 x 1**

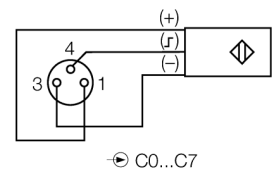

**Output M8 x 1**

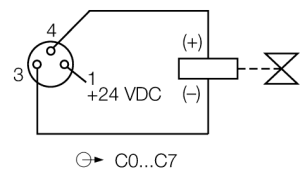

**Voltage supply M8 x 1**

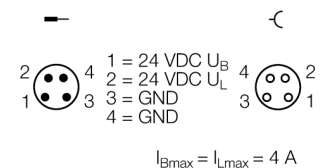

<b>Type code</b>	SDPB-0404D-1007
<b>Ident no.</b>	6824429
<b>Operating / load voltage</b>	20...29 VDC
<b>Operating current</b>	≤ 90 mA
<b>Fieldbus transmission rate</b>	9.6 kbps ... 12 Mbps
<b>Fieldbus addressing</b>	0 to 99
<b>Service interface</b>	parameterisation via I/O-ASSISTANT
<b>Electrical isolation</b>	Fieldbus to operational voltage
<b>Number of channels</b>	4 digital inputs acc. to EN 61131-2
<b>Input voltage</b>	20...29 VDC via operating voltage
<b>Low level signal voltage</b>	-3...5 VDC (EN 61131-2, type 2)
<b>High level signal voltage</b>	11...30 VDC (EN 61131-2, type 2)
<b>Input delay</b>	3 ms
<b>Max. input current</b>	6 mA
<b>Number of channels</b>	4 digital outputs acc. to EN 61131-2
<b>Output voltage</b>	20...29 VDC from load voltage
<b>Output current per channel</b>	2 A (Σ 4 A), short-circuit proof
<b>Load type</b>	resistive, inductive, lamp load
<b>Switching frequency</b>	≤ 500 Hz
<b>Simultaneity factor</b>	0.5
<b>Dimensions (W x L x H)</b>	30x210x26.5mm
<b>Operating temperature</b>	0...+55 °C
<b>Storage temperature</b>	-25 to 85 °C
<b>Vibration test</b>	as per EN 60068-2-6
<b>Shock test</b>	acc. to DIN EN 60068-2-27
<b>Electro-magnetic compatibility</b>	according to EN 61000-6-2/EN 61000-6-4
<b>Protection class</b>	IP67
<b>Approvals</b>	CE, cULus

**piconet® stand-alone module for PROFIBUS-DP**  
**4 digital pnp inputs filter 3 ms**  
**4 digital outputs 2 A**  
**SDPB-0404D-1007**

Data in process image

			Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
The 4 most significant bits are not used, but require memory allocation.	Input	Byte n (M8)	idle	idle	idle	idle	C3P4	C2P4	C1P4	C0P4
		Byte n (M12)	idle	idle	idle	idle	C1P2	C1P4	C0P2	C0P4
	Output	Byte n (M8)	idle	idle	idle	idle	C7P4	C6P4	C5P4	C4P4
		Byte n (M12)	idle	idle	idle	idle	C3P2	C3P4	C2P2	C2P4

C... = Connector no., P... = Pin no.