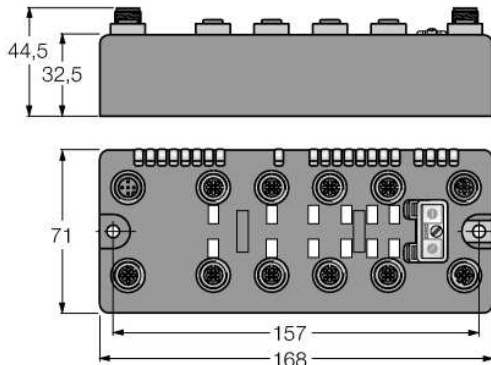


BL compact fieldbus station for CANopen
16 Configurable Digital PNP Channels
BLCCO-8M12LT-8XSG-P-8XSG-P

- Compact fieldbus I/O module in IP69K
- CANopen slave
- 10, 20, 50, 125, 250, 500, 800, or 1000 kbps
- Two 5-pole M12 connectors for fieldbus connection
- 2 rotary switches for node address
- IP69K
- M12 I/O connectors
- LEDs indicating status and diagnostics
- Electronics galvanically separated from the field level via optocouplers
- 16 Configurable digital PNP channels, 24 VDC
- Max. 0.5A per channel
- Selection of filtering times (Input delay)
- Invertible inputs

Type code	BLCCO-8M12LT-8XSG-P-8XSG-P
Ident no.	6811316

Nominal system voltage	24 VDC
System power supply	via fieldbus and auxiliary
Voltage supply connection	2 x M12, 4-pole
Nominal current V+	30 mA
Max. current V+	4 A
Admissible range Vi	18...30VDC
Nominal current Vi	200 mA
Max. current Vi	2 A
Admissible range Vo	18...30VDC
Nominal current Vo	200 mA
Max. current Vo	4 A

Fieldbus transmission rate	10 kbps ... 1 Mbps
Adjustment transmission rate	auto detection
Fieldbus addressing range	1...99
Fieldbus addressing	2 decimally coded rotary switches
Fieldbus connection technology	2 x M12
	5-pole
Fieldbus termination	external
Service interface	RS232 interface

Digital inputs	
Input type	PNP
Type of input diagnostics	group diagnostics
Sensor supply (V _{SENS})	24 VDC
Low level signal voltage	< 4.5 VDC
High level signal voltage	7...30 VDC
Low level signal current	< 1.5 mA
High level signal current	2.1 ... 3.7 mA
Input delay	(configurable) 0.25 or 2.5 ms

Digital outputs	
Output type	PNP
Sensor supply (V _{SENS})	24 VDC
Output current per channel	0.5 A
Output voltage	24 VDC
Output delay	3 ms
Load type	resistive, inductive, lamp load
Load resistance, resistive	> 48 Ω
Load resistance, inductive	< 1.2 H
Lamp load	< 3 W
Switching frequency, resistive	< 200 Hz
Switching frequency, inductive	< 2 Hz
Switching frequency, lamp load	< 20 Hz
Short-circuit protection	yes

BL compact fieldbus station for CANopen
16 Configurable Digital PNP Channels
BLCCO-8M12LT-8XSG-P-8XSG-P

Dimensions	1680x 710x 325 mm
Operating temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Relative humidity	15 to 95% (non-condensing)
Vibration test	according to IEC 61131-2
Extended vibration resistance	
- up to 20 g (at 10 to 150 Hz)	For mounting on base plate or machinery
Shock test	according to IEC 61131-2
Electro-magnetic compatibility	according to IEC 61131-2
Protection class	IP69K
Housing material	Glass-filled nylon, nickel plated brass connectors
Housing color	Black
Window material	Lexan
Screw material	Nickel plated brass
Label material	Polyester with Polycarbonate overlay
Ground tab material	Nickel plated brass
Weight	620 ± 20 g
Approvals and certificates	CE, cULus

	Fieldbus cable (example): RSC RKC 572-2M ident-no. U0323 or RSC-RKC572-2M ident-no. 6603629	Pin assignment 1 = shield 2 = V + 3 = V - 4 = CAN_H 5 = CAN_L 1 = shield 2 = V + 3 = V - 4 = CAN_H 5 = CAN_L
	Extension cable (example): RK 4.4T-2-RS 4.4T ident-no. U2445 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208	Pin assignment 1 = VSENS 2 = Signal B 3 = GND 4 = Signal A 5 = PE
	Reference Slot 1	Pin assignment 1 = VSENS 2 = Signal B 3 = GND 4 = Signal A 5 = PE
	Extension cable (example): RKC 4.4T-2-RSC 4.4T ident-no. U5264 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208	Pin assignment 1 = Vi 2 = Vo 3 = GND 4 = GND 1 = Vi 2 = Vo 3 = GND 4 = GND

Status: Station LED

LED	Color	Status	Description
IOs		OFF	No power supply
	RED	ON	Insufficient power supply
	RED	FLASHING (1Hz)	Deviating station configuration
	RED	FLASHING (4 Hz)	No module bus communication
	GREEN	ON	Station OK
	GREEN	FLASHING	Force mode active
ERR	-	OFF	Normal operating mode
	RED	ON	CAN communication interrupted
BUS	GREEN	ON	NMT slave status operational
	ORANGE	ON	NMT slave status pre-operational
	RED	ON	NMT slave status stopped
ERR & BUS	RED	FLASHING (4 Hz)	Invalid node ID

Status: I/O LED, slot 1

LED	Color	Status	Description
D1 *		OFF	Diagnostic disabled
	RED	ON	Station / module bus communication failure
	RED	FLASHING (0.5Hz)	Group diagnostic
XSG Kanäle 1 ₀ ...1 ₇		OFF	Status channel x = 0 (OFF), diagnostic disabled
	GREEN	ON	Status channel x = 1 (ON)
	RED	ON	Short-circuit at output

* D1 LED also indicates gateway diagnostic

I/O LED Status Slot 2

LED	Colour	Status	Description
D2 *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Any diagnostics active
XSG channels 2 ₀ ...2 ₇		OFF	Channel status x = "0" (OFF), no diagnostics active
	GREEN	ON	Channel status x = "1" (ON)
	RED	ON	Short-circuit at output

* D2 LED also reports gateway diagnostics

I/O Data Map

INPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	DI 1 ₇	DI 1 ₆	DI 1 ₅	DI 1 ₄	DI 1 ₃	DI 1 ₂	DI 1 ₁	DI 1 ₀
	1	DI 2 ₇	DI 2 ₆	DI 2 ₅	DI 2 ₄	DI 2 ₃	DI 2 ₂	DI 2 ₁	DI 2 ₀
OUTPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	DO 1 ₇	DO 1 ₆	DO 1 ₅	DO 1 ₄	DO 1 ₃	DO 1 ₂	DO 1 ₁	DO 1 ₀
	1	DO 2 ₇	DO 2 ₆	DO 2 ₅	DO 2 ₄	DO 2 ₃	DO 2 ₂	DO 2 ₁	DO 2 ₀