



**General Description**

Polyfet's GAN (on SiC) HEMT power transistors contain no internal matching; making them suitable for both broadband and narrow band applications. The use of a thermally enhanced package enables this device to have superior heat dissipation properties. The high drain break down voltage permits this device to operate over a wide voltage range.



**RF POWER GAN TRANSISTOR**  
 50.0 Watts Single Ended  
 Package Style GX  
**HIGH EFFICIENCY, LINEAR**  
**HIGH GAIN, LOW NOISE**  
**ROHS COMPLIANT**

**ABSOLUTE MAXIMUM RATINGS ( T = 25 °C )**

Total Device Dissipation	Junction to Case Thermal Resistance	Maximum Junction Temperature	Storage Temperature	Drain to Source Voltage	Gate to Source Voltage
75 Watts	3.50 °C/W	200 °C	-65 °C to 150 °C	180 V	-10 V to +2 V

**RF CHARACTERISTICS ( 50.0 WATTS OUTPUT )**


SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Gps	Common Source Power Gain	11			dB	Idq = 0.13 A, Vds = 48.0 V, F = 2,000 MHz
η	Drain Efficiency		55		%	Idq = 0.13 A, Vds = 48.0 V, F = 2,000 MHz
VSWR	Load Mismatch Tolerance			10:1	Relative	Idq = 0.13 A, Vds = 48.0 V, F = 2,000 MHz

**ELECTRICAL CHARACTERISTICS ( EACH SIDE )**

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Bvdss	Drain Breakdown Voltage	250			V	Ids = 7.50mA, Vgs = -8V
Idsat	Saturation Current		6.00		Amp	Vgs = +2V, Vds = 10V
Idss	Zero Bias Drain Current			2.0	mA	Vds = 48.0 V, Vgs = -8V
Vgs	Gate Bias for Drain Current		-2.5		V	Vds = 48.0 V Ids = 0.13A
Ciss	Common Source Input Capacitance		7.5		pF	Vds = 48.0 Vgs = -8V, F = 1 MHz
Crss	Common Source Feedback Capacitance		0.30		pF	Vds = 48.0 Vgs = -8V, F = 1 MHz
Coss	Common Source Output Capacitance		8.4		pF	Vds = 48.0 Vgs = -8V, F = 1 MHz

# GX2441

POUT VS PIN GRAPH

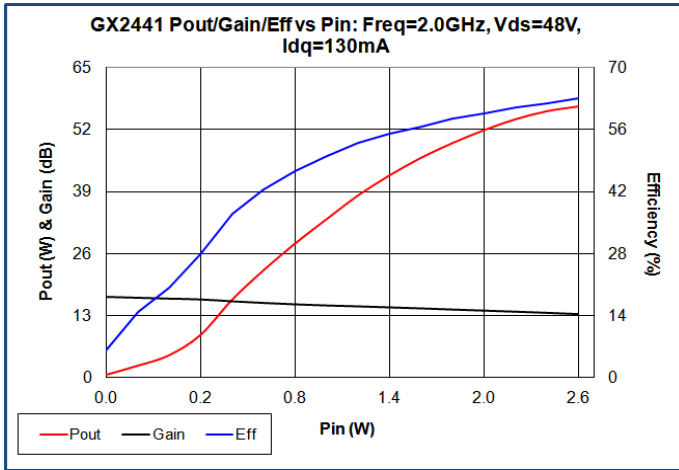


BROADBAND PERFORMANCE

BROADBAND PERFORMANCE

BROADBAND PERFORMANCE

BROADBAND PERFORMANCE

PACKAGE DIMENSIONS IN INCHES

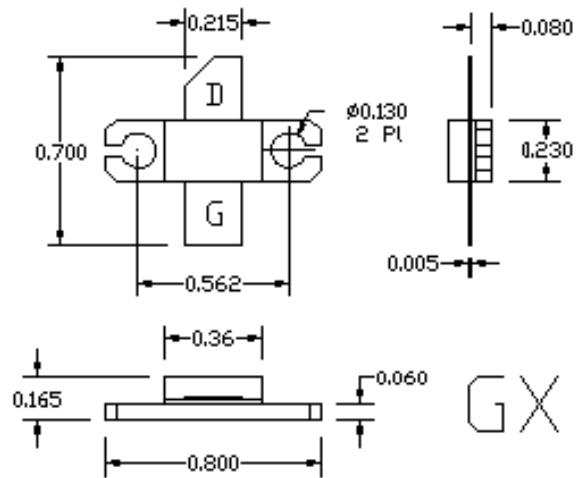

Tolerance .XX +/-0.01 .XXX +/- .005 inches

POLYFET RF DEVICES

REVISION 05/21/2013