



MICROWAVE CORPORATION v03.0412



HMC615LP4 / 615LP4E

GaAs MMIC MIXER w/ INTEGRATED LO AMPLIFIER, 2.3 - 4.0 GHz

Typical Applications


The HMC615LP4E is ideal for:

- PCS / 3G Infrastructure
- Base Stations & Repeaters
- WiMAX & WiBro
- ISM & Fixed Wireless

Features

- High Input IP3: +35 dBm
- Low Input LO Drive: -2 to +6 dBm
- Low Conversion Loss: 10 dB
- Single Positive Supply: +5V @ 65 mA
- 24 Lead 4x4mm QFN Package: 9 mm²

Functional Diagram

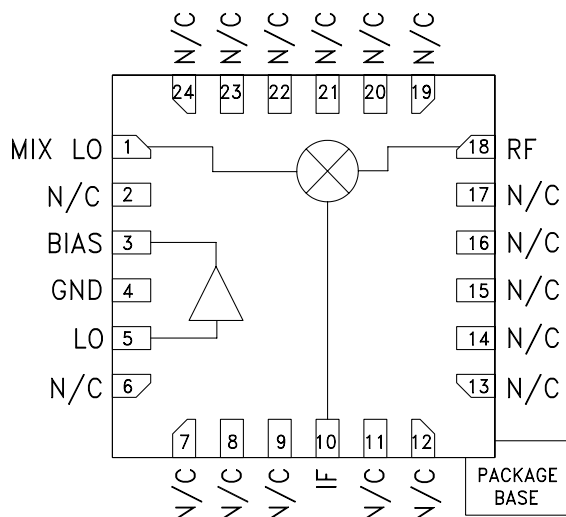

General Description

The HMC615LP4(E) are high linearity, GaAs FET converter ICs that operate from 2.3 to 4.0 GHz and deliver a +35 dBm input third order intercept point. The LO amplifier output and high dynamic range mixer input are positioned so that an external LO filter can be placed in series between them. The IC operates from a single +5V supply consuming 65 mA of current and accepts a LO drive level of -2 to +6 dBm. The design requires no external baluns and supports IF frequencies between DC and 1 GHz. The HMC615LP4(E) is pin for pin compatible with the HMC551LP4(E), HMC552LP4(E) and HMC215LP4(E), which operate from 0.8 to 4.0 GHz. For availability on Non-RoHS HMC615LP4 products please contact Hittite Microwave sales directly.

Electrical Specifications, $T_A = +25^\circ \text{C}$, LO = 4 dBm, Vcc = +5V, R1 = 18 Ohms, IF = 200 MHz*

Parameter	Min.	Typ.	Max.	Units
Frequency Range, RF, LO	2.3 - 4.0			GHz
Frequency Range, IF	DC - 1.0			GHz
Conversion Loss *		10	13	dB
Noise Figure (SSB)		10		dB
LO to RF Isolation	5	15		dB
LO to IF Isolation *	1	10		dB
IP3 (Input)		35		dBm
1 dB Compression (Input)		21		dBm
LO Drive Input Level (Typical)	-2 to +6			dBm
Supply Current (Icc)		65	75	mA


*Unless otherwise noted, all measurements performed as a downconverter configured as shown in application circuit.

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824


Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.com

Application Support: Phone: 978-250-3343 or apps@hittite.com


**Conversion Gain
vs. Temperature @ LO = 4 dBm**

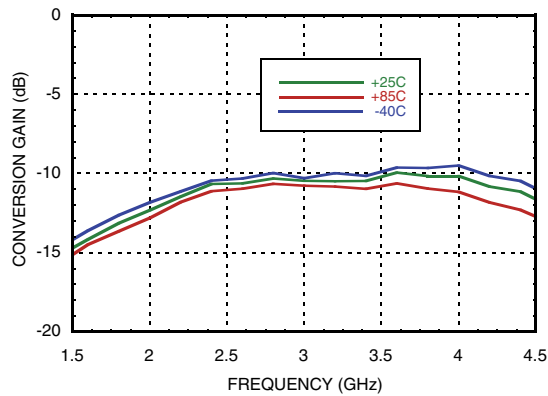


Isolation @ LO = 4 dBm

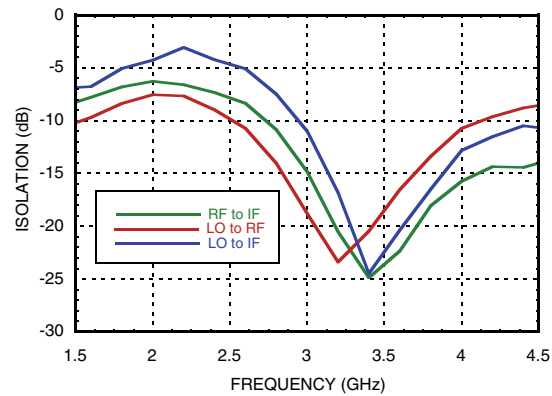


Conversion Gain vs. LO Drive

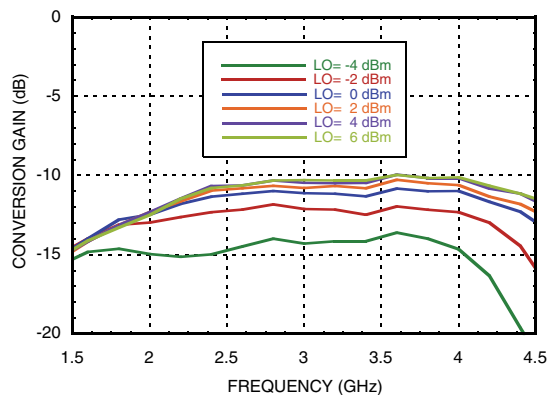


Return Loss @ LO = 4 dBm

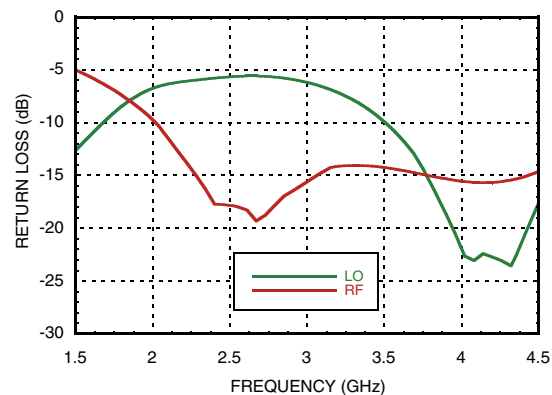


**Upconverter Performance (IF = 100 MHz)
Conversion Gain vs. LO Drive**

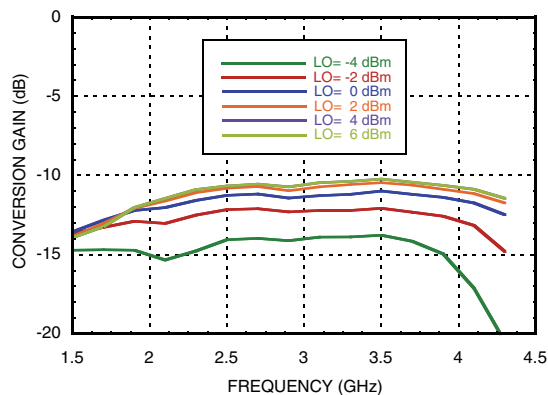


IF Bandwidth @ LO = 4 dBm

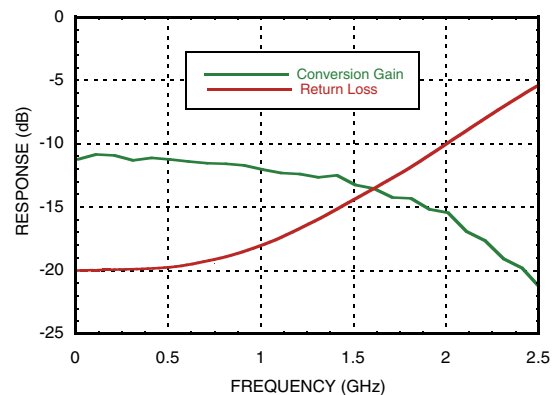


Input IP3 vs. Temperature @ LO = 4 dBm

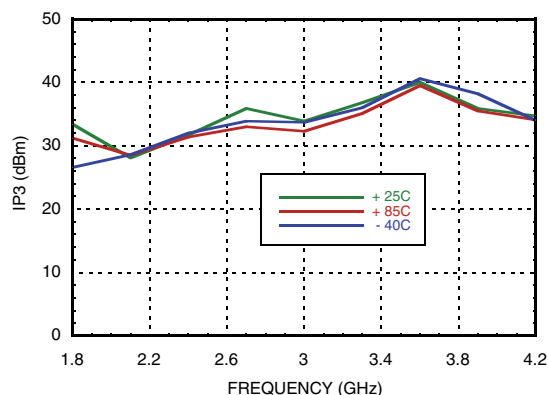


Input IP3 vs. LO Drive

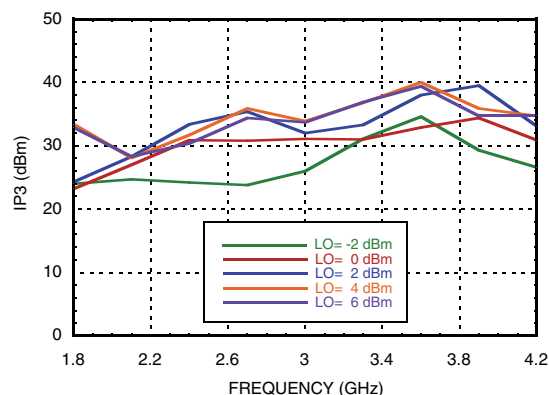


Input IP2 vs. Temperature @ LO = 4 dBm

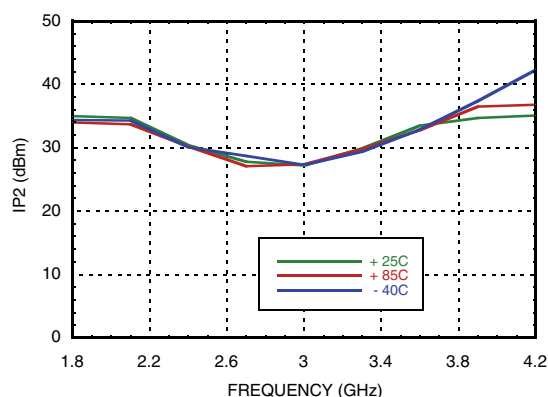

Input IP2 vs. LO Drive

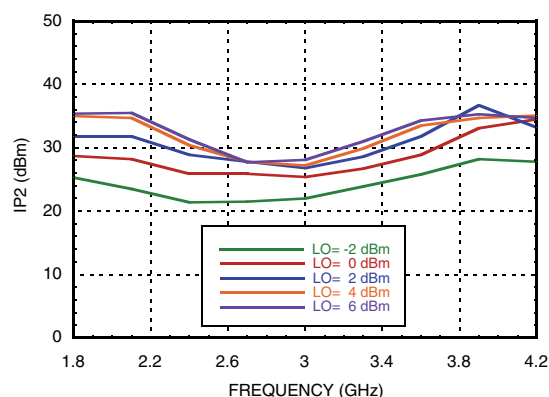

Input P1dB vs. Temperature @ LO = 4 dBm

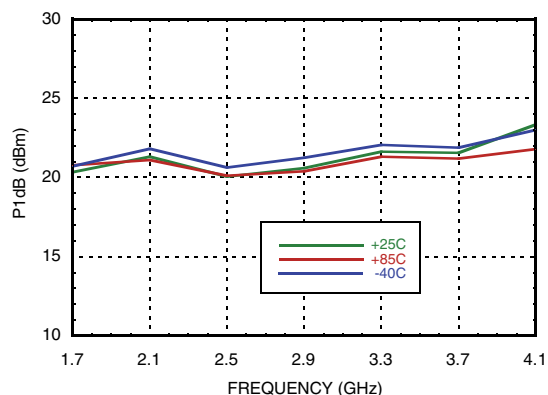

MxN Spurious @ IF Port

	nLO				
mRF	0	1	2	3	4
0	xx	-11	-1	6	10
1	5	0	16	37	36
2	58	67	55	51	60
3	98	102	103	82	91
4	99	99	104	106	107

RF Freq. = 3 GHz @ -10 dBm
LO Freq. = 2.8 GHz @ 0 dBm
All values in dBc relative to the IF power level.



GaAs MMIC MIXER w/ INTEGRATED LO AMPLIFIER, 2.3 - 4.0 GHz

RF / IF Input (Vcc= +5V)	+27 dBm
LO Drive (Vcc= +5V)	+10 dBm
BIAS	+7 Vdc
Junction Temperature	150°C
Continuous P _{diss} (T = 85°C) (derate 5.21 mW/°C above 85°C)	0.339 W
Thermal Resistance (junction to ground paddle)	192 °C/W
Storage Temperature	-65 to +150°C
Operating Temperature	-40 to +85°C

	nLO Spur @ RF Port			
LO Freq. (GHz)	1	2	3	4
1	8	13	29	31
1.8	5	23	18	34
2.6	11	12	27	30
3.4	15	16	48	27
4.2	7	18	27	27
5	16	27	38	43

LO = 0 dBm
All values in dBc below input LO level measured at RF port.



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

Vcc	Icc (mA)
+5.0	65 mA

TOP VIEW

Dimensions: .161 [.410] / .153 [3.90] (width), .161 [.410] / .153 [3.90] (height), .101 [.256] / .096 [2.44] (lead width), .116 [2.95] / .104 [2.65] (lead pitch), .039 [1.00] / .031 [0.80] (lead height), .002 [.05] / .000 [0.00] (lead thickness), .003 [0.08] (lead width), .016 [0.40] REF (lead spacing), .008 [0.20] MIN (lead spacing), .022 [0.56] / .017 [0.44] (lead height), .012 [.30] / .007 [0.18] (lead height), .016 [0.40] REF (lead spacing), .008 [0.20] MIN (lead spacing), .022 [0.56] / .017 [0.44] (lead height), .012 [.30] / .007 [0.18] (lead height).

BOTTOM VIEW

Dimensions: .012 [.30] / .007 [0.18] (lead height), .016 [0.40] REF (lead spacing), .008 [0.20] MIN (lead spacing), .022 [0.56] / .017 [0.44] (lead height), .012 [.30] / .007 [0.18] (lead height), .016 [0.40] REF (lead spacing), .008 [0.20] MIN (lead spacing), .022 [0.56] / .017 [0.44] (lead height), .012 [.30] / .007 [0.18] (lead height), .016 [0.40] REF (lead spacing), .008 [0.20] MIN (lead spacing), .022 [0.56] / .017 [0.44] (lead height).

NOTES:

1. LEADFRAME MATERIAL: COPPER ALLOY
2. DIMENSIONS ARE IN INCHES [MILLIMETERS]
3. LEAD SPACING TOLERANCE IS NON-CUMULATIVE
4. PAD BURR LENGTH SHALL BE 0.15mm MAX

TOP VIEW

Dimensions: .161 [.410] / .153 [3.90] (width), .161 [.410] / .153 [3.90] (height), .101 [.256] / .096 [2.44] (lead width), .116 [2.95] / .104 [2.65] (lead pitch), .039 [1.00] / .031 [0.80] (lead height), .002 [.05] / .000 [0.00] (lead thickness), .003 [0.08] (lead width), .016 [0.40] REF (lead spacing), .008 [0.20] MIN (lead spacing), .022 [0.56] / .017 [0.44] (lead height), .012 [.30] / .007 [0.18] (lead height), .016 [0.40] REF (lead spacing), .008 [0.20] MIN (lead spacing), .022 [0.56] / .017 [0.44] (lead height), .012 [.30] / .007 [0.18] (lead height).

BOTTOM VIEW

Dimensions: .012 [.30] / .007 [0.18] (lead height), .016 [0.40] REF (lead spacing), .008 [0.20] MIN (lead spacing), .022 [0.56] / .017 [0.44] (lead height), .012 [.30] / .007 [0.18] (lead height), .016 [0.40] REF (lead spacing), .008 [0.20] MIN (lead spacing), .022 [0.56] / .017 [0.44] (lead height), .012 [.30] / .007 [0.18] (lead height), .016 [0.40] REF (lead spacing), .008 [0.20] MIN (lead spacing), .022 [0.56] / .017 [0.44] (lead height).

NOTES:

1. LEADFRAME MATERIAL: COPPER ALLOY
2. DIMENSIONS ARE IN INCHES [MILLIMETERS]
3. LEAD SPACING TOLERANCE IS NON-CUMULATIVE
4. PAD BURR LENGTH SHALL BE 0.15mm MAX

1. LEADFRAME MATERIAL: COPPER ALLOY
2. DIMENSIONS ARE IN INCHES [MILLIMETERS]
3. LEAD SPACING TOLERANCE IS NON-CUMULATIVE.
4. PAD BURR LENGTH SHALL BE 0.15mm MAXIMUM.
4. PAD BURR HEIGHT SHALL BE 0.05mm MAXIMUM.
5. PACKAGE WARP SHALL NOT EXCEED 0.05mm.
6. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.
7. REFER TO HITTITE APPLICATION NOTE FOR SUGGESTED L AND PATTERN.

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking ^[3]
HMC615LP4	Low Stress Injection Molded Plastic ^[4]	Sn/Pb Solder	MSL1 ^[1]	H615 XXXX
HMC615LP4E	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 ^[2]	<u>H615</u> XXXX

[4] For availability of Non-RoHS HMC615LP4 products please contact Hittite Microwave sales directly.

Application Support: Phone: 978-250-3343 or apps@hittite.com



MICROWAVE CORPORATION v03.0412




HMC615LP4 / 615LP4E

GaAs MMIC MIXER w/ INTEGRATED LO AMPLIFIER, 2.3 - 4.0 GHz


Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1	MIX LO	This pin is DC coupled and matched to 50 Ohms. An off chip DC blocking capacitor is required.	
2, 6 - 9, 11 - 17, 19 - 24	N/C	No connection. These pins may be connected to RF ground. Performance will not be affected.	
3	BIAS	Power supply for the LO amplifier, a Bias resistor is required. Three external bypass capacitors are recommended for optimum performance, as illustrated in the application circuit.	
4	GND	Backside of package has exposed metal ground paddle that must also be connected to ground.	
5	LO	This pin is DC coupled and matched to 50 Ohms. An off chip DC blocking capacitor is required.	
10	IF	This pin is DC coupled. For applications not requiring operation to DC, this port should be DC blocked externally using a series capacitor whose value has been chosen to pass the necessary IF frequency range. For operation to DC, this pin must not source/sink more than 18 mA of current or die non-function and possible die failure will result.	
18	RF	This pin is DC coupled and matched to 50 Ohms.	

Application Circuit

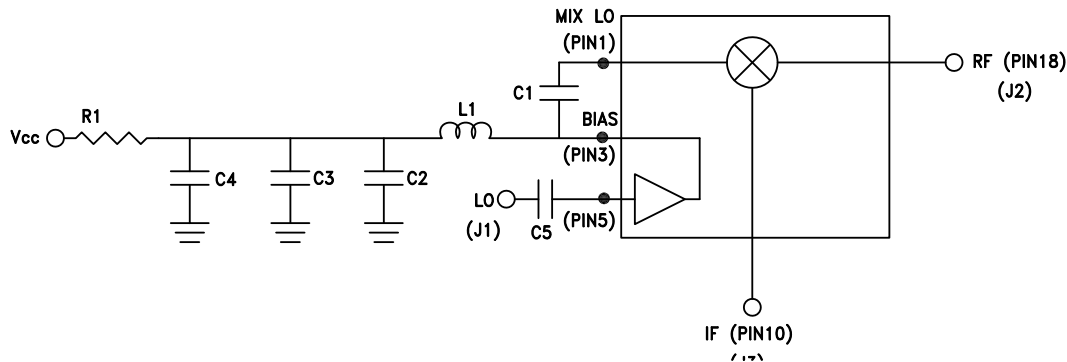

Evaluation PCB

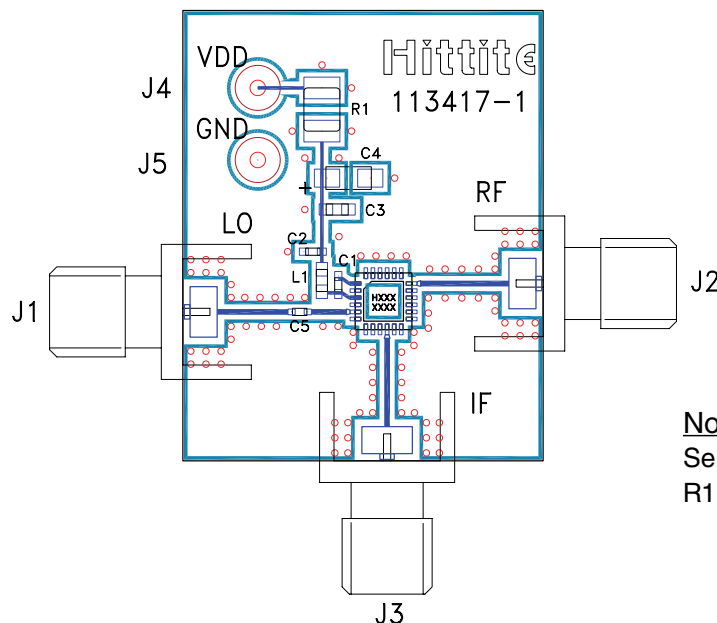

Recommended Components Values (IF = DC - 300 MHz)

C3	1000 pF
C4	2.2 μF
C1, C2, C5	100 pF
L1	18 nH
R1	18 Ohm

Note :

Select R1 to achieve Icc by using equation below, $R1 \geq 18 \text{ Ohms}$.

$$I_{cc} = (V_s - 3.8) / R1$$

List of Materials for Evaluation PCB 115906 [1]

Item	Description
J1 - J3	PCB Mount SMA RF Connector
J4, J5	DC Pin
C1, C2, C5	100 pF Chip Capacitor, 0402 Pkg.
C3	1000 pF Chip Capacitor, 0603 Pkg.
C4	2.2 μF Capacitor, Tantalum
L1	18 nH Chip Inductor, 0603 Pkg.
R1	18 Ohm Resistor, 1210 1/8 watt Pkg.
U1	HMC615LP4E
PCB [2]	113417 Evaluation Board

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.