




General Description

Silicon VDMOS and LDMOS transistors designed specifically for broadband RF applications. Suitable for Military Radios, Cellular and Paging Amplifier Base Stations, Broadcast FM/AM, MRI, Laser Driver and others.

"Polyfet"™ process features gold metal for greatly extended lifetime. Low output capacitance and high F_t enhance broadband performance

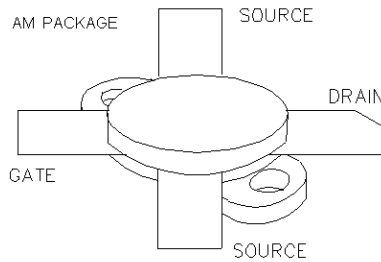

**PATENTED GOLD METALIZED
SILICON GATE ENHANCEMENT MODE
RF POWER VDMOS TRANSISTOR**

60 Watts Single Ended

Package Style AM

**HIGH EFFICIENCY, LINEAR,
HIGH GAIN, LOW NOISE**

ABSOLUTE MAXIMUM RATINGS (TC = 25 °C)

Total Device Dissipation	Junction to Case Thermal Resistance	Maximum Junction Temperature	Storage Temperature	DC Drain Current	Drain to Gate Voltage	Drain to Source Voltage	Gate to Source Voltage
120 Watts	1.5 °C/W	200 °C	-65 °C to 150 °C	6 A	70 V	70 V	30V

RF CHARACTERISTICS (60WATTS OUTPUT)


SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Gps	Common Source Power Gain	13			dB	$I_{dq} = 0.6 \text{ A}$, $V_{ds} = 28.0 \text{ V}$, $F = 175 \text{ MHz}$
η	Drain Efficiency		60		%	$I_{dq} = 0.6 \text{ A}$, $V_{ds} = 28.0 \text{ V}$, $F = 175 \text{ MHz}$
VSWR	Load Mismatch Tolerance			20:1	Relative	$I_{dq} = 0.6 \text{ A}$, $V_{ds} = 28.0 \text{ V}$, $F = 175 \text{ MHz}$

ELECTRICAL CHARACTERISTICS (EACH SIDE)


SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Bvdss	Drain Breakdown Voltage	65			V	$I_{ds} = 0.15 \text{ A}$, $V_{gs} = 0 \text{ V}$
Idss	Zero Bias Drain Current			3	mA	$V_{ds} = 28.0 \text{ V}$, $V_{gs} = 0 \text{ V}$
Igss	Gate Leakage Current			1	uA	$V_{ds} = 0 \text{ V}$, $V_{gs} = 30 \text{ V}$
Vgs	Gate Bias for Drain Current	1		7	V	$I_{ds} = 0.3 \text{ A}$, $V_{gs} = V_{ds}$
gM	Forward Transconductance		2.4		Mho	$V_{ds} = 10 \text{ V}$, $V_{gs} = 5 \text{ V}$
Rdson	Saturation Resistance		0.5		Ohm	$V_{gs} = 20 \text{ V}$, $I_{ds} = 12 \text{ A}$
Idsat	Saturation Current		16.5		Amp	$V_{gs} = 20 \text{ V}$, $V_{ds} = 10 \text{ V}$
Ciss	Common Source Input Capacitance		99		pF	$V_{ds} = 28.0 \text{ V}$, $V_{gs} = 0 \text{ V}$, $F = 1 \text{ MHz}$
Crss	Common Source Feedback Capacitance		12		pF	$V_{ds} = 28.0 \text{ V}$, $V_{gs} = 0 \text{ V}$, $F = 1 \text{ MHz}$
Coss	Common Source Output Capacitance		60		pF	$V_{ds} = 28.0 \text{ V}$, $V_{gs} = 0 \text{ V}$, $F = 1 \text{ MHz}$

F1003


POUT VS PIN GRAPH

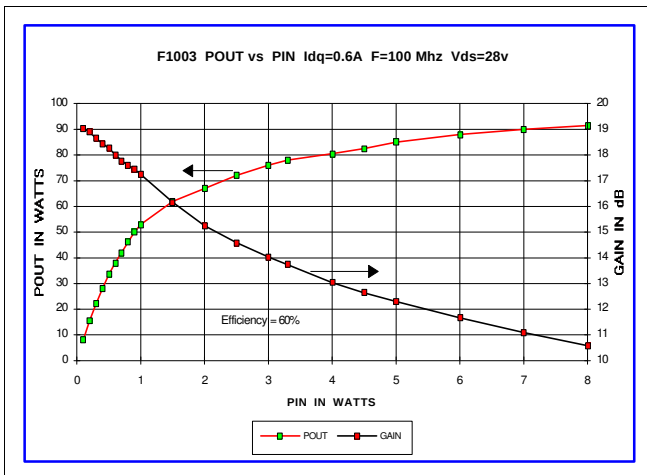


CAPACITANCE VS VOLTAGE

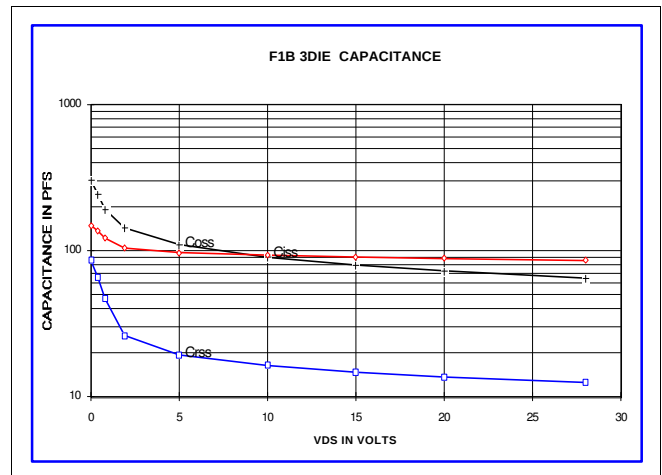


IV CURVE

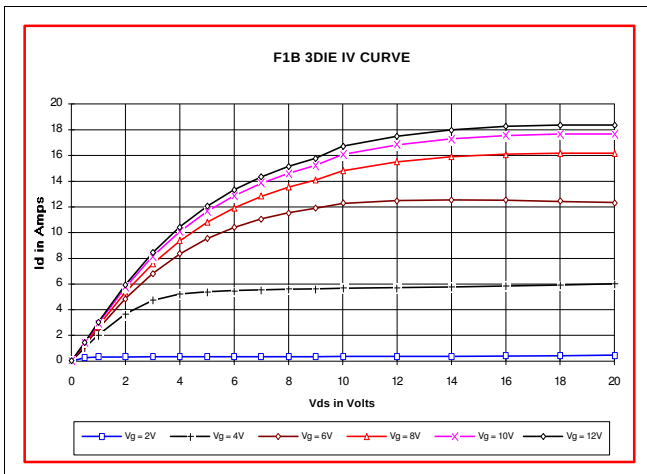


ID AND GM VS VGS

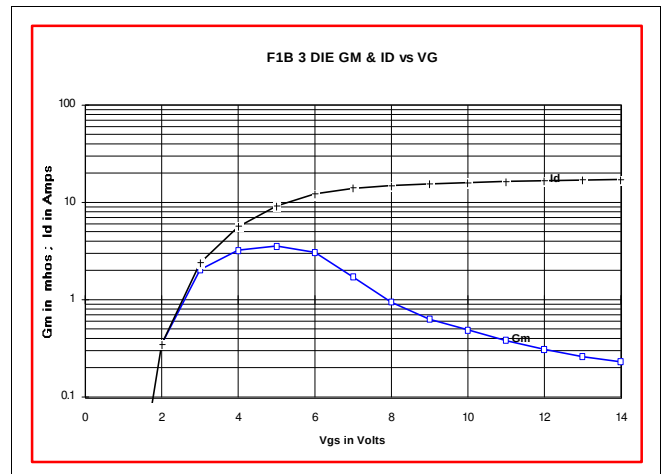

S11 AND S22 SMITH CHART

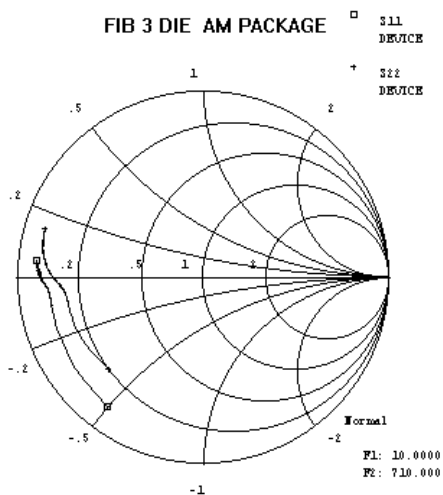

PACKAGE DIMENSIONS IN INCHES

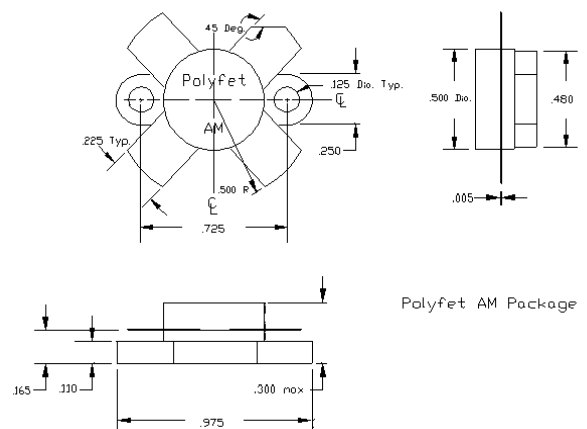

POLYFET RF DEVICES

REVISION 8/1/97