



OZCCDJAN2011

Surface Mount PTC

0ZCC Series

1812 Chip
RoHS6 Compliant & Halogen-Free



Application
All high-density boards

Product Features
1812 Chip Size, Fast Trip Time, Low DCR Resistance

Operating (Hold Current) Range
140mA ~ 3A

Maximum Voltage
6V ~ 60V (per table)

Temperature Range
-40°C to 85°C


Agency Approval

UL Component (Std. UL1434, File E305051)

UL Conditions of Acceptability:

- These devices have been investigated for use in safety circuits and are suitable as a limiting device.
- These devices have been calibrated to limit the current to 8 amps within 5 seconds, per ANSI/NFPA 70, "National Electrical Code"

Product Dimensions

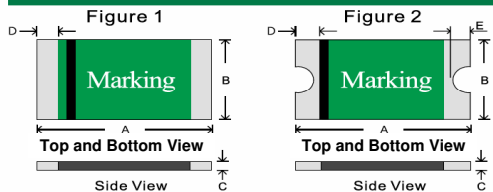

| Part Number | Fig. | A | | B | | C | | D | | E | |
|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| 0ZCC0014FF2C Thru 0ZCC0075FF2C | 1 | 4.37 | 4.73 | 3.07 | 3.41 | 0.35 | 0.90 | 0.30 | 0.95 | ---- | ---- |
| 0ZCC0075AF2B | 2 | 4.37 | 4.73 | 3.07 | 3.41 | 0.80 | 1.55 | 0.25 | 0.95 | 0.25 | 0.65 |
| 0ZCC0075BF2B | 2 | 4.37 | 4.73 | 3.07 | 3.41 | 0.80 | 1.55 | 0.25 | 0.95 | 0.25 | 0.65 |
| 0ZCC0110FF2C | 1 | 4.37 | 4.73 | 3.07 | 3.41 | 0.25 | 0.55 | 0.30 | 0.95 | ---- | ---- |
| 0ZCC0110AF2C | 1 | 4.37 | 4.73 | 3.07 | 3.41 | 0.25 | 0.90 | 0.30 | 0.95 | ---- | ---- |
| 0ZCC0110BF2B | 2 | 4.37 | 4.73 | 3.07 | 3.41 | 0.80 | 1.30 | 0.25 | 0.95 | 0.25 | 0.65 |
| 0ZCC0125FF2C | 1 | 4.37 | 4.73 | 3.07 | 3.41 | 0.25 | 0.55 | 0.30 | 0.95 | ---- | ---- |
| 0ZCC0150FF2C | 1 | 4.37 | 4.73 | 3.07 | 3.41 | 0.25 | 0.55 | 0.30 | 0.95 | ---- | ---- |
| 0ZCC0150AF2C | 2 | 4.37 | 4.73 | 3.07 | 3.41 | 0.60 | 1.10 | 0.25 | 0.95 | 0.25 | 0.65 |
| 0ZCC0150BF2C | 2 | 4.37 | 4.73 | 3.07 | 3.41 | 0.60 | 1.55 | 0.25 | 0.95 | 0.25 | 0.65 |
| 0ZCC0160FF2C | 1 | 4.37 | 4.73 | 3.07 | 3.41 | 0.25 | 0.90 | 0.30 | 0.95 | ---- | ---- |
| 0ZCC0160AF2C | 2 | 4.37 | 4.73 | 3.07 | 3.41 | 0.60 | 1.35 | 0.25 | 0.95 | 0.25 | 0.65 |
| 0ZCC0160BF2C | 2 | 4.37 | 4.73 | 3.07 | 3.41 | 0.60 | 1.35 | 0.25 | 0.95 | 0.25 | 0.65 |
| 0ZCC0200FF2C | 2 | 4.37 | 4.73 | 3.07 | 3.41 | 0.55 | 1.20 | 0.25 | 0.95 | 0.25 | 0.65 |
| 0ZCC0260FF2C | 2 | 4.37 | 4.73 | 3.07 | 3.41 | 0.55 | 1.20 | 0.25 | 0.95 | 0.25 | 0.65 |
| 0ZCC0260AF2B | 2 | 4.37 | 4.73 | 3.07 | 3.41 | 0.80 | 1.55 | 0.25 | 0.95 | 0.25 | 0.65 |
| 0ZCC0260BF2B | 2 | 4.37 | 4.73 | 3.07 | 3.41 | 0.80 | 1.55 | 0.25 | 0.95 | 0.25 | 0.65 |
| 0ZCC0300FF2B | 2 | 4.37 | 4.73 | 3.07 | 3.41 | 0.80 | 1.55 | 0.25 | 0.95 | 0.25 | 0.65 |

Standard Package & Marking

| Part Number | Reel/Tape | "b" code | | H code |
|--------------|-----------|----------|--------|--------|
| | | b xxxx | b xxxx | |
| 0ZCC0014FF2C | 2K | 0014 | | |
| 0ZCC0020FF2C | 2K | 0020 | | |
| 0ZCC0035FF2C | 2K | 0035 | | |
| 0ZCC0050FF2C | 2K | 0050 | | |
| 0ZCC0075FF2C | 2K | 0075 | | |
| 0ZCC0075AF2B | 1.5K | | 075 | 24 |
| 0ZCC0075BF2B | 1.5K | | 075 | 33 |
| 0ZCC0110FF2C | 2K | 0110 | | |
| 0ZCC0110AF2C | 2K | | 110 | 16 |
| 0ZCC0110BF2B | 1.5K | | 110 | 24 |
| 0ZCC0125FF2C | 2K | 0125 | | |
| 0ZCC0150FF2C | 2K | 0150 | | |
| 0ZCC0150AF2C | 2K | | 150 | 12 |
| 0ZCC0150BF2C | 2K | | 150 | 24 |
| 0ZCC0160FF2C | 2K | 0160 | | |
| 0ZCC0160AF2C | 2K | | 160 | 12 |
| 0ZCC0160BF2C | 2K | | 160 | 16 |
| 0ZCC0200FF2C | 2K | | 200 | A |
| 0ZCC0260FF2C | 2K | 0260 | | |
| 0ZCC0260AF2B | 1.5K | | 260 | 13 |
| 0ZCC0260BF2B | 1.5K | | 260 | 16 |
| 0ZCC0300FF2B | 1.5K | 0300 | | |

2000 or 1500 fuses in 7 inches dia. Reel, 8mm wide tape, 4mm pitch, per EIA-481 (equivalent IEC-286 part 3).

Electrical Characteristics (23°C)

| Part Number | Hold Current | | Trip Current | | Max. Time to Trip | | Maximum Current | Rated Voltage | Typical Power | Resistance Tolerance | | | Agency Approvals | |
|----------------|--------------------|--------------------|--------------|---------|----------------------|------------------------|-----------------|---------------|---------------|----------------------|-----------------------|-----------------------|------------------------|----|
| | I _H , A | I _T , A | Current, A | Seconds | I _{max} , A | V _{max} , Vdc | | | | P _d , W | R _{min} Ohms | R _{max} Ohms | R _{1max} Ohms | UL |
| A 0ZCC0014FF2C | 0.14 | 0.30 | 8 | 0.008 | 10 | 60 | 0.8 | 1.20 | 2.50 | 6.50 | Y | Y | | |
| B 0ZCC0020FF2C | 0.20 | 0.40 | 8 | 0.02 | 10 | 30 | 0.8 | 0.800 | 2.573 | 5.000 | Y | Y | | |
| C 0ZCC0035FF2C | 0.35 | 0.70 | 8 | 0.10 | 40 | 16 | 0.8 | 0.32 | 0.80 | 1.50 | Y | Y | | |
| D 0ZCC0050FF2C | 0.50 | 1.00 | 8 | 0.15 | 40 | 16 | 0.8 | 0.15 | 0.57 | 1.00 | Y | Y | | |
| E 0ZCC0075FF2C | 0.75 | 1.50 | 8 | 0.20 | 40 | 16 | 0.8 | 0.11 | 0.27 | 0.45 | Y | Y | | |
| E 0ZCC0075AF2B | 0.75 | 1.50 | 8 | 0.20 | 40 | 24 | 1.0 | 0.11 | 0.20 | 0.29 | Y | Y | | |
| E 0ZCC0075BF2B | 0.75 | 1.50 | 8 | 0.20 | 40 | 33 | 1.0 | 0.11 | 0.25 | 0.40 | Y | Y | | |
| F 0ZCC0110FF2C | 1.10 | 2.20 | 8 | 0.30 | 100 | 8 | 0.8 | 0.04 | 0.11 | 0.21 | Y | Y | | |
| F 0ZCC0110AF2C | 1.10 | 1.95 | 8 | 0.50 | 40 | 16 | 0.8 | 0.04 | 0.12 | 0.18 | Y | Y | | |
| F 0ZCC0110BF2B | 1.10 | 2.20 | 8 | 0.50 | 100 | 24 | 1.0 | 0.06 | 0.13 | 0.20 | Y | Y | | |
| G 0ZCC0125FF2C | 1.25 | 2.50 | 8 | 0.40 | 40 | 6 | 0.8 | 0.05 | 0.08 | 0.14 | Y | Y | | |
| H 0ZCC0150FF2C | 1.50 | 3.00 | 8 | 0.50 | 40 | 6 | 0.8 | 0.04 | 0.07 | 0.11 | Y | Y | | |
| H 0ZCC0150AF2C | 1.50 | 3.00 | 8 | 0.50 | 100 | 12 | 1.0 | 0.040 | 0.075 | 0.110 | Y | Y | | |
| H 0ZCC0150BF2C | 1.50 | 3.00 | 8 | 1.50 | 100 | 24 | 1.0 | 0.040 | 0.070 | 0.120 | Y | Y | | |
| I 0ZCC0160FF2C | 1.60 | 3.20 | 8 | 0.50 | 40 | 6 | 0.8 | 0.030 | 0.066 | 0.100 | Y | Y | | |
| I 0ZCC0160AF2C | 1.60 | 3.20 | 8 | 1.0 | 100 | 12 | 1.0 | 0.030 | 0.060 | 0.100 | Y | Y | | |
| I 0ZCC0160BF2C | 1.60 | 3.20 | 8 | 1.0 | 100 | 16 | 1.0 | 0.030 | 0.060 | 0.100 | Y | Y | | |
| J 0ZCC0200FF2C | 2.00 | 3.50 | 8 | 2.0 | 100 | 8 | 1.0 | 0.020 | 0.045 | 0.070 | Y | Y | | |
| K 0ZCC0260FF2C | 2.60 | 5.00 | 8 | 2.5 | 100 | 6 | 1.0 | 0.015 | 0.031 | 0.047 | Y | Y | | |
| K 0ZCC0260AF2B | 2.60 | 5.00 | 8 | 5.0 | 100 | 13.2 | 1.3 | 0.015 | 0.030 | 0.050 | Y | Y | | |
| K 0ZCC0260BF2B | 2.60 | 5.00 | 8 | 5.0 | 100 | 16 | 1.3 | 0.015 | 0.030 | 0.050 | Y | Y | | |
| L 0ZCC0300FF2B | 3.00 | 5.00 | 8 | 4.0 | 100 | 6 | 1.0 | 0.012 | 0.025 | 0.040 | Y | Y | | |

I_H Hold current-maximum current at which the device will not trip in still air at 23°C.

I_T Trip current-minimum current at which the device will always trip in still air at 23°C.

I_{max} Maximum fault current device can withstand without damage at rated voltage (V_{max}).

V_{max} Maximum voltage device can withstand without damage at its rated current.

P_d Typical power dissipated by device when in tripped state in 23°C still air environment.

R_{min} Minimum device resistance at 23°C.

R_{max} Maximum device resistance at 23°C.


R_{1max} Maximum device resistance at 23°C, 1 hour after initial device trip.

Termination pad characteristics


Termination pad materials
Matte Tin-plated Copper

Pad Layout, Solder Reflow and Rework Recommendations

The dimensions in the table below provide the recommended pad layout for each 0ZCC device

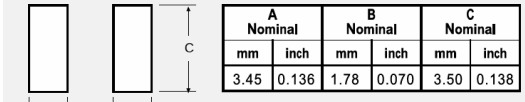

| Profile Feature | Pb-Free Assembly |
|---|------------------|
| Average Ramp-Up Rate (T_{smax} to T_p) | 3 °C/second max. |
| Preheat: | |
| Temperature Min (T _{smin}) | 150 °C |
| Temperature Max (T _{smax}) | 200 °C |
| Time (t _{smin} to t _{smax}) | 60-180 seconds |
| Time maintained above: | |
| Temperature (T _i) | 217 °C |
| Time (t _i) | 60-150 seconds |
| Peak/Classification Temperature (T_p) | 260 °C |
| Time within 5°C of actual Peak: | |
| Temperature (t _p) | 20-40 seconds |
| Ramp-Down Rate: | 6 °C/second max. |
| Time 25 °C to Peak Temperature: | 8 minutes max. |

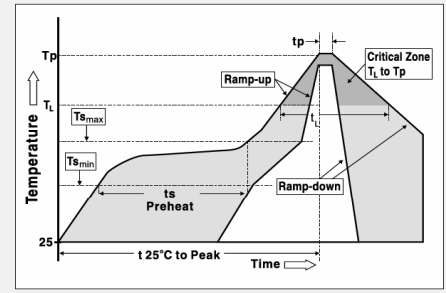

Solder Reflow

* Due to "lead free/RoHS6" construction of these PTC devices, the required Temperature and Dwell Time in the "Soldering" zone of the reflow profile are greater than those used for non-RoHS devices.

1. Recommended reflow methods; IR, vapor phase oven, hot air oven.
2. The 0ZCC Series is suitable for wave solder application methods.
3. Recommended maximum paste thickness is 0.25mm.
4. Devices are compatible with standard industry cleaning solvents and methods.

Caution

If reflow temperature/dwell times exceed the recommended profile, the electrical performance of the PTC may be affected.

Rework

MIL-STD-202G Method 210F. Test Condition A.

HALOGEN FREE = HF
LEAD FREE = Pb-free

Specifications subject to change without notice

Surface Mount PTC


OZCC Series

1812 Chip
RoHS6 Compliant & Halogen-Free




OZCCCJAN2011

Typical Time - To - Trip at 23°C

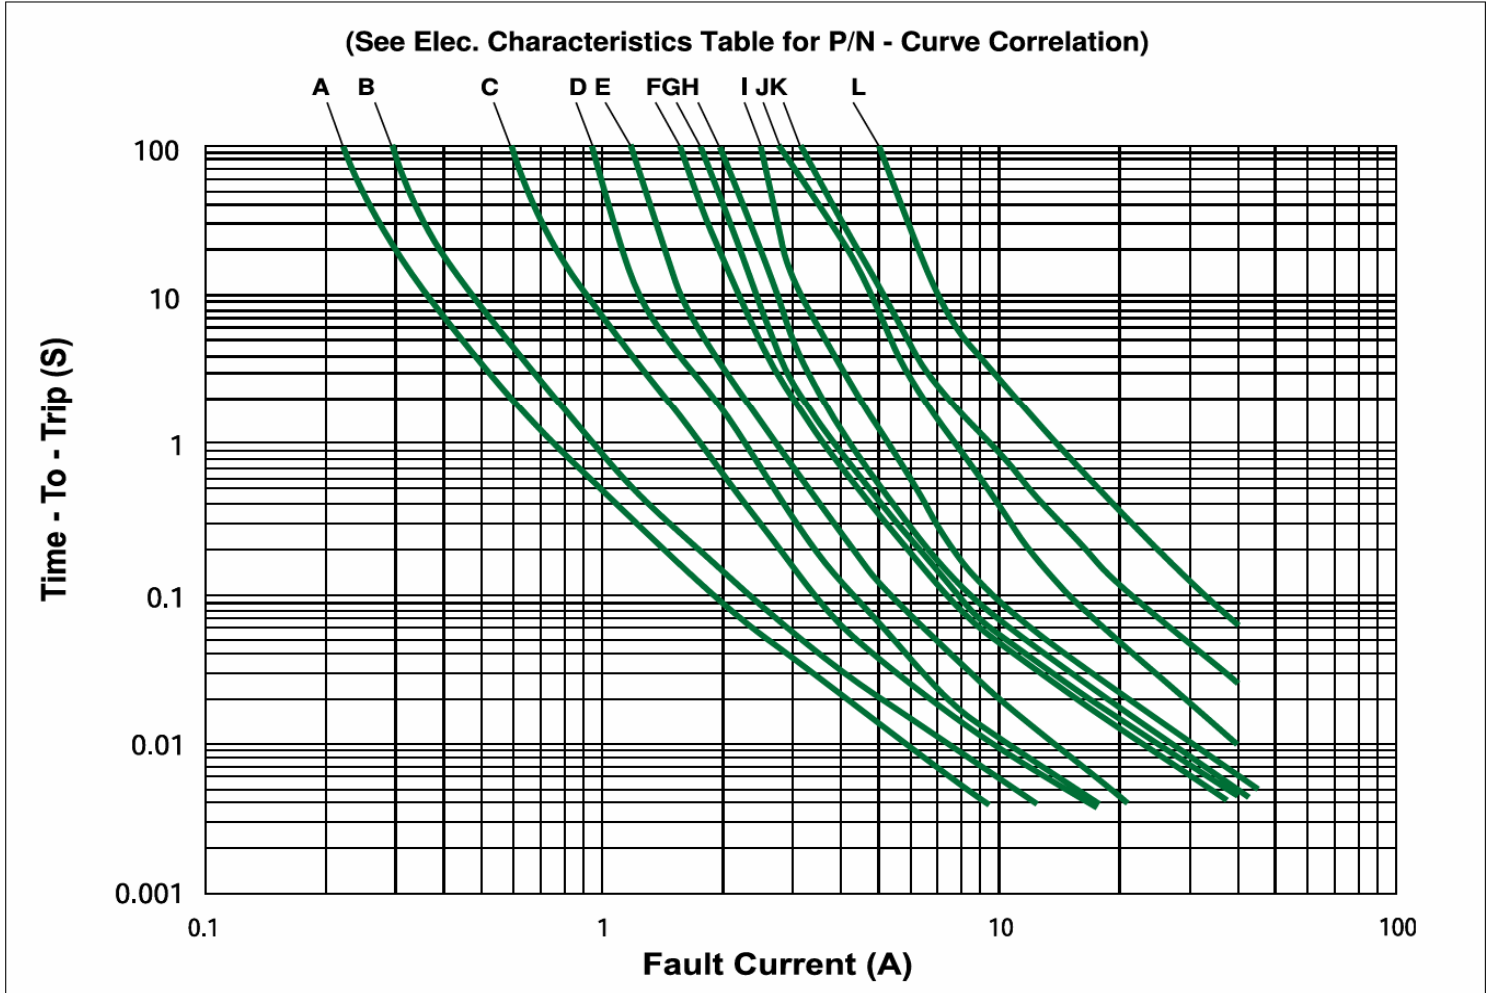

Thermal Derating Curve

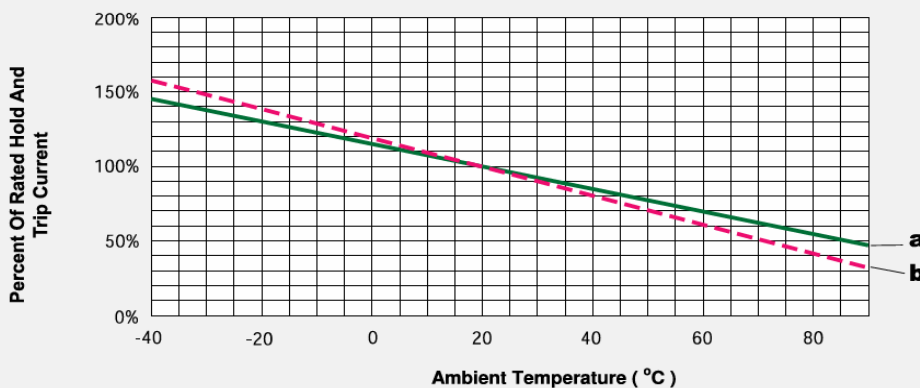

a = OZCC0075, OZCC0110, OZCC0125, OZCC0150, OZCC0160, OZCC0200, OZCC0260 & OZCC0300
b = OZCC0014, OZCC0020, OZCC0035 & OZCC0050

Cautionary Notes

1. Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
2. These Polymer PTC (PPTC) devices are intended for protection against occasional overcurrent/ overtemperature fault conditions and may not be suitable for use in applications where repeated and/ or prolonged fault conditions are anticipated.
3. Avoid contact of PTC device with chemical solvent. Prolonged contact may adversely impact the PTC performance.
4. These PTC devices may not be suitable for use in circuits with a large inductance, as the PTC trip can generate circuit voltage spikes above the PTC rated voltage.

Specifications subject to change without notice

Corporate Office

Bel Fuse Inc.

206 Van Vorst Street, Jersey City, NJ 07302
Tel: 201-432-0463
Fax: 201-432-9542
E-Mail: belfuse@belfuse.com
Website: www.belfuse.com

Far East Office

Bel Fuse Ltd.

8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
E-Mail : bel_hk@belfuse.com

European Office

Bel Stewart GmbH

Industriestrasse 20
61381 Friedrichsdorf
Germany
Tel 49-6172-9552-0
Fax 49-6172-9552-40
E-Mail : cprebeck@bel-stewart.com